

Approval body for construction products  
and types of construction

Bautechnisches Prüfamt

An institution established by the Federal and  
Laender Governments



## European Technical Assessment

ETA-07/0117  
of 17 July 2017

English translation prepared by DIBt - Original version in German language

### General Part

Technical Assessment Body issuing the  
European Technical Assessment:

Deutsches Institut für Bautechnik

Trade name of the construction product

Permanent shuttering kit "IZODOM 2000 POLSKA"

Product family  
to which the construction product belongs

Non-load bearing permanent shuttering kit  
"IZODOM 2000 POLSKA" based on shuttering elements  
of EPS

Manufacturer

izodom 2000 polska  
ul. Ceramiczna 2  
98-220 Zdunska Wola  
POLEN

Manufacturing plant

Plant 1  
Plant 2  
Plant 3  
Plant 4

This European Technical Assessment  
contains

158 pages including 2 annexes which form an integral  
part of this assessment

This European Technical Assessment is  
issued in accordance with Regulation (EU)  
No 305/2011, on the basis of

Guideline for European technical approval of "Non load-  
bearing permanent shuttering kits/systems based on  
hollow blocks or panels of insulating materials and  
sometimes concrete", ETAG 009,  
used as European Assessment Document (EAD)  
according to Article 66 Paragraph 3 of Regulation (EU)  
No 305/2011.

This version replaces

ETA-07/0117 issued on 7 May 2012

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Definition of the product and intended use

#### 1.1 Definition of the construction product

The shuttering kit "IZODOM 2000 POLSKA" is used to construct non-load bearing permanent formwork for plain and reinforced concrete walls cast in-situ.

The "IZODOM 2000 POLSKA" system comprises five types of walls:

- "STANDARD",
- "PRINCE BLOCK"
- "KING BLOCK",
- "SUPER KING BLOCK",
- "SUPER KING BLOCK PLUS",
- "UNIVERSAL" and
- "UNIVERSAL PLUS".

These wall types are differentiated by:

- thickness of foam material in one of the shuttering walls,
- design of the elements and
- thickness of the concrete wall core.

All elements are available in two types of foam material:

- Styropor F415E (white expanded polystyrene) and
- Neopor F2400 (graphite-enriched expanded polystyrene)

In every type of wall standard shuttering elements, special shuttering elements and accessory parts are included. Special shuttering elements are height adjuster elements, angel joint elements (45°) for inner and outer corners, hinge elements to realise walls with arbitrary angles, header elements (for lintels), floor support elements and door head elements. Accessory parts are auxiliary elements, height adjuster elements, trimming strips, plugs and closing elements as well as the ties.

#### 1.2 Shuttering elements

##### 1.2.1 Standard shuttering elements

The system contains the following types of shuttering elements:

MC	shuttering elements completely made of EPS (Styropor or Neopor)
MCF	shuttering elements with shuttering leaves of EPS (Styropor or Neopor) and <u>embedded</u> plastic ties (see Annex A112 to A114, A117 and A119) to connect both shuttering leaves
MCFU	shuttering elements with shuttering leaves of EPS (Styropor or Neopor) and <u>dismountable</u> plastic ties (see Annexes A110, A111 and A118) to connect both shuttering leaves
MCFU-St	shuttering elements with shuttering leaves of EPS (Styropor or Neopor) and <u>dismountable</u> ties of plastic parts and steel wires (see Annexes A115 and A116) to connect both shuttering leaves

Shuttering elements MC form walls of the grid type and shuttering elements MCF, MCFU and MCFU-St form walls of the continuous type according to ETAG 009, section 2.2. The main difference between the shuttering elements MCF and MCFU is that shuttering elements MCF are delivered to the site in form of completed shuttering elements meanwhile elements MCFU and MCFU-St are delivered on site in single parts (shuttering leaves and ties) and are completed to shuttering elements before sticking together the formwork. In Table 1 of Annex A1 the main dimensions of the different shuttering element types in dependence on the wall types are given.

The horizontal surfaces at the top of the shuttering leaves are castellated and the horizontal surfaces at the bottom are alternately grooved. The vertical mating surfaces are smooth. The tightness of the vertical joints between the leaves of the shuttering elements is ensured. They may not open during concreting because of the form fit in the horizontal joints. To facilitate works on site, all elements in the system have vertical grooves on external surfaces. One groove is 3 mm wide and 1 mm deep and the distance between the grooves is 5 cm. The grooves are used as cutting line, if the length of an element needs to be adjusted to the length of the wall.

Interior of the shuttering leaves T-shaped guides in the distance of 5 cm are placed. The guides are featured in all types of shuttering elements, regardless the wall thickness, core thickness and the type of used ties. They are necessary to fix OH and OB plugs at the narrow side of the uncut shuttering elements MC and the OC closing elements at the narrow sides of the shuttering elements MCF, MCFU or MCFU-St respectively at the opened narrow sides of the cut shuttering elements MC. The grooves and the T-shaped guides allow the application of the smallest modular dimension of 5 cm in horizontal direction.

A vertical modularity is ensured by using (depending on the needs) three types of height adjuster elements which are featured in the system. The height of the adjusters is 5 cm to enable construction of all wall types in the smallest modular dimension of 5 cm in vertical direction.

### 1.2.2 Special shuttering elements

For all wall types special shuttering elements are available. Additional to the shuttering type nomination (MC, MCF, MCFU and MCFU-St) for special shuttering elements the following nominations are used:

ML	Header elements (for lintels)
MLI / MLA	Door head elements
MP	Floor support elements
MH	Height adjuster elements
MHF	Height adjuster elements for hinge elements

For the description of the angel joint elements the following additional nominations are used:

L	left
R	right
I	inner corner
A	outer corner

The surfaces of the special shuttering leaves (horizontal and vertical) are equal to the surfaces of the standard shuttering elements (see section 1.2.1).

### 1.3 Accessory parts

#### 1.3.1 Auxiliary elements MD 1/10 (Annex A104)

Auxiliary elements MD 1/10 are single shuttering leaves which are used for the construction of rectangular corners for walls with a thickness of 35 cm and 45 cm. The assembly of such wall corners is given in the Annexes B16 to B19.

#### 1.3.2 Height adjuster elements MHD 1/10 (Annex A105)

Since shuttering leaves of the height adjuster elements MH and MHF are only 5 cm thick the extension with height adjuster elements MHD 1/10 always is necessary if the outer shuttering leaves of the used shuttering elements are thicker than 5 cm.

#### 1.3.3 Trimming strips (Annex A106)

Two types of trimming strips are included in the kit:

- with a castellated surface
- with a grooved surface

The opposite side of the strips is always smooth. The strips are used for finishing of:

- bottoms of header elements and door head elements
- overhang parts of the walls

When packaging all castellated and grooved surfaces of all types of shuttering elements are covered by trimming strips. They provide the protection of the castellated and grooved surfaces during storage and transport.

#### 1.3.4 Plugs (Annexes A95 and A96)

Upper plugs OH (Annex A95) and lower plugs OB (Annex A96) are half-elliptical elements used to close the ends of the shuttering elements MC of the wall types "STANDARD", "KING BLOCK" and "SUPER KING BLOCK". The plugs are used to build wall corners, window and door openings and blunt-ended inside walls. The form fit between the profiled contact surfaces of the plugs and the ties provide a tight connection of the plugs. The plug can be installed in the tie axis as well as 5 cm before the axis and 5 cm behind the axis.

#### 1.3.5 Closing elements (Annexes A97 to A103)

It allows closing of the open narrow sides at corners, door openings and blunt-ended inside walls. The closing elements are installed vertically inside the shuttering element, by sliding it on the vertical T-guides made of foam material. The closing elements of the kit are listed in Annex A1, section 3.5.

#### 1.3.6 Ties

In Table 3 of Annex A1 an overview is given which ties are used for which shuttering elements:

## 2 Specification of the Intended use in accordance with the applicable European Assessment Document

The kit is intended to be used for the construction of internal walls as well as external walls above or below ground which are load-bearing (structural) or non load-bearing (non structural), including those which are subjected to fire regulations.

When using this type of construction below ground a waterproofing according to applicable national rules shall be provided depending on whether non pressing water or pressing water is to be dealt with. The waterproofing shall be protected from mechanical damage by an impact resistant protective layer.

According to EOTA TR 034 the following use categories apply:

- Category IA 2: Product with no direct contact to (e. g. covered products) but possible impact on indoor air.
- Category S/W 3: Product with no contact to and no impact on soil water, ground- and surface water.

The performance given in Section 3 are only valid if the shuttering elements are used in compliance with the specifications and conditions given in Annex B1.

The verification and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the shuttering kit of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the manufacturer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### **3 Performance of the product and references to the methods**

#### **3.1 Mechanical resistance and stability (BWR 1)**

##### **3.1.1 Resulting structural pattern**

In end use conditions walls made with shuttering elements MC form walls of the grid type and with elements MCF, MCFU and MCFU-St walls of the continuous type according to ETAG 009, section 2.2.

##### **3.1.2 Efficiency of filling**

Considering the instructions of section 4.2 and the installation guide of the ETA holder the efficient filling without bursting of the shuttering and without voids or any uncovered reinforcement in the concrete core is possible.

The requirements according to ETAG 009, section 6.1.2 are met satisfactory.

##### **3.1.3 Possibility of steel reinforcement**

The instructions in the installation guide of the ETA holder are appropriate to install steel reinforcement for walls according to EN 1992-1-1 or corresponding national rules (see e. g. Annexes B8 to B15 and B21).

The requirements according to ETAG 009, section 6.1.3 are met satisfactory.

#### **3.2 Safety in case of fire (BWR 2)**

##### **3.2.1 Reaction to fire**

Both expanded polystyrene materials (Styropor and Neopor) fulfill the conditions for Class E according to EN 13501-1.

##### **3.2.2 Resistance to fire**

According to ETAG 009 Annex C, Table 2, the grid system (shuttering elements MC) meets the criteria of **R 30**.

According to ETAG 009, Annex C, Table 1, first column, last line the continuous type system (shuttering elements MCF, MCFU and MCFU-St) meets the criteria of **REI 120**.

The preconditions for these classifications are:

- The design of the building has to take the secondary effects of fire into account. Especially constraints, introduced by thermal strain, should be sufficiently low and appropriate building joints should be foreseen. The rules, effective at the place of use, shall apply. Structural requirements under normal conditions, applicable at the place of use, may require larger dimensions. Concrete cover for the reinforcement has to be observed according to the rules, applicable at the place of use.
- A normal weight concrete as defined in EN 206-1 shall be used. If EN 206-1 is not in force, an equivalent concrete according to national rules, applicable at the place of use, is acceptable.
- The strength of concrete shall be between C16/20 and C50/60 according to EN 206-1. Due to the lack of availability of the European standard EN 206-1, alternatively a concrete according to national rules, applicable at the place of use, with a compressive strength which fits in the interval given above, is also considered as appropriate.
- The walls on both sides shall either be plastered/rendered or at least the joints on both sides shall be sealed with plastering/rendering mortar. The mortar for plastering/rendering or sealing shall be based on inorganic aggregates, gypsum, cement or lime or on suitable combinations of these three binders.
- The walls are exposed to fire on only one side.

### 3.3 Hygiene, health and environment (BWR 3)

#### 3.3.1 Content and/or release of dangerous substances

Essential characteristic	Performance
Contents of dangerous substances	The product does not contain CMR-substances actively used (in accordance with Regulation (EC) No 1272/2008) and no HBCDD.
Release scenario regarding BWR 3: IA2	

#### 3.3.2 Water vapour permeability

The tabulated design value of water vapour diffusion resistance coefficient of expanded polystyrene (EPS), according to EN ISO 10456, is  $\mu = 60$ .

The values for the water vapour diffusion resistance of concrete in dependence of density and type are tabulated in EN ISO 10456.

### 3.4 Safety and assessibility in use (BWR 4)

#### 3.4.1 Bond strength between the shuttering leaves and the concrete core

The expanded polystyrene is bonded to the concrete by mechanical interlocking of the T-guides running vertically in the inner surfaces of the shuttering leaves over the whole element height with a horizontal distance of 5 cm. Since the width of the T-guides is 20 mm the effective area for transmission of tensile forces is  $0.02 \times 1 \text{ m}^2/\text{unit} \times 20 \text{ unit}/\text{m}^2 = 0.4 \text{ m}^2/\text{m}^2$ . This is more than 20 % of the whole area of the shuttering leaves and leads to the effective bond strength of  $0.04 \text{ N}/\text{mm}^2$ , this is sufficient to meet the requirements in ETAG 004, section 6.1.4.1.3.

The requirements according to ETAG 009, section 6.4.1.3 are met satisfactory.

### **3.4.2 Resistance to pressure of fresh concrete**

To resist the filling pressure the bending tensile strength of the shuttering leaves shall be more than 200 kPa (see also designation code of EPS in Annex A1, section 3.5) and the strength to pull out of the ties more than 700 N.

The requirements according to ETAG 009, section 6.4.2 are met satisfactory.

### **3.4.3 Safety against personal injury by contact**

As delivered on site the shuttering elements do not have sharp or cutting edges.

Because of the soft surface of the shuttering leaves there is no risk of abrasion or of cutting to people.

The requirements according to ETAG 009, section 6.4.3 are met satisfactory.

## **3.5 Protection against noise (BWR 5)**

### **3.5.1 Airborne sound insulation**

The "No performance assessed" option in ETAG 009, Table 3 is used.

### **3.5.2 Sound absorption**

The "No performance assessed" option in ETAG 009, Table 3 is used.

## **3.6 Energy economy and heat retention (BWR 6)**

### **3.6.1 Thermal resistance**

In the following Tables 1 to 3 are listed the thermal resistances for all wall sections which are included in the system "IZODOM 2000 POLSKA" (see Annex A1, Table 1 and 2). These values have been determined by numerical calculations (finite differences) taking the influence of the polystyrene, plastic and plastic combined with steel ties into account. In these calculations the following thermal conductivities according to EN 13163 of the expanded polystyrene were used:

- for Styropor 0.035 W/(m K) and
- for Neopor 0.032 W/(m K)

For the concrete the value of 2.1 W/(m K) was used, which is higher than given in EN ISO10456.

**Table 1:** Thermal resistance values (calculated without plaster) and equivalent thermal conductivities in dependence of the type of shuttering element, type of expanded polystyrene and the thickness of the outer layer of expanded polystyrene (in every case is the thickness of inner layer of expanded polystyrene 50 mm and the thickness of concrete core 150 mm)

Type of shuttering element	Material	Thickness of the concrete core 150 mm					
		Exterior thermal insulation thickness 50 mm		Exterior thermal insulation thickness 150 mm		Exterior thermal insulation thickness 250 mm	
		R [m <sup>2</sup> K/W]	λ <sub>eq</sub> [W/m <sup>2</sup> K]	R [m <sup>2</sup> K/W]	λ <sub>eq</sub> [W/m <sup>2</sup> K]	R [m <sup>2</sup> K/W]	λ <sub>eq</sub> [W/m <sup>2</sup> K]
MC	Styropor	2.77	0.0901	5.84	0.0600	8.56	0.0526
	Neopor	3.02	0.0827	6.37	0.0549	9.34	0.0482
MCFU	Styropor	2.70	0.0926	--	--	--	--
	Neopor	2.94	0.0851	--	--	--	--
MCF	Styropor	2.68	0.0933	5.45	0.0642	--	--
	Neopor	2.91	0.0859	5.92	0.0592	--	--
MCFU-St	Styropor	2.68	0.0933	5.44	0.0643	--	--
	Neopor	2.91	0.0859	5.91	0.0592	--	--

**Table 2:** Thermal resistance values (calculated without plaster) and equivalent thermal conductivities in dependence of the type of shuttering element, type of expanded polystyrene and the thickness of the outer layer of expanded polystyrene (in every case is the thickness of inner layer of expanded polystyrene 50 mm and the thickness of concrete core 200 mm)

Type of shuttering element	Material	Thickness of the concrete core 200 mm					
		Exterior thermal insulation thickness 50 mm		Exterior thermal insulation thickness 150 mm		Exterior thermal insulation thickness 250 mm	
		R [m <sup>2</sup> K/W]	λ <sub>eq</sub> [W/m <sup>2</sup> K]	R [m <sup>2</sup> K/W]	λ <sub>eq</sub> [W/m <sup>2</sup> K]	R [m <sup>2</sup> K/W]	λ <sub>eq</sub> [W/m <sup>2</sup> K]
MCFU	Styropor	2.75	0.109	--	--	7.93	0.0630
	Neopor	2.99	0.100	--	--	8.62	0.0580

**Table 3:** Thermal resistance values (calculated without plaster) and equivalent thermal conductivities in dependence of the type of shuttering element, type of expanded polystyrene and the thickness of the outer layer of expanded polystyrene (in every case is the thickness of inner layer of expanded polystyrene 50 mm and the thickness of concrete core 400 mm)

Type of shuttering element	Material	Thickness of the concrete core 400 mm					
		Exterior thermal insulation thickness 50 mm		Exterior thermal insulation thickness 150 mm		Exterior thermal insulation thickness 250 mm	
		R [m <sup>2</sup> K/W]	$\lambda_{eq}$ [W/m <sup>2</sup> K]	R [m <sup>2</sup> K/W]	$\lambda_{eq}$ [W/m <sup>2</sup> K]	R [m <sup>2</sup> K/W]	$\lambda_{eq}$ [W/m <sup>2</sup> K]
MCF	Styropor	2.85	0.175	--	--	--	--
	Neopor	3.08	0.162	--	--	--	--
MCFU-St	Styropor	2.85	0.176	--	--	--	--
	Neopor	3.08	0.162	--	--	--	--

### 3.6.2 Heat capacity

The values for heat capacity of concrete and expanded polystyrene are tabulated in EN ISO 10456.

## 3.7 General aspects

### 3.7.1 Resistance to deterioration

#### Physical agent

As given in the designation code of the EPS material used (see Annex A1, section 4.1) the dimensions of the shuttering leaves do not differ more than 3 % after exposing them for 48 h at 70 °C (DS(70,-)3).

The requirements according to ETAG 009, section 6.7.1.1 are met satisfactory.

#### Chemical agent

Corrosion may only occur with the ties MCFU-St, which have parts of steel which in end use conditions are embedded in the concrete. After hardening of the concrete the bond between concrete and shuttering leaves is given by the T-guides running vertically on the inner surfaces of shuttering leaves (see section 3.4.1).

Therefore the requirement "corrosion protection" according to ETAG 009, section 6.7.1.2 is met satisfactory.

#### Biological agent

The application of EPS as thermal insulating material for decades has shown that it sufficiently protects against fungi, bacteria, algae and insects.

EPS does not provide a food value and in general it does not contain voids suitable for habitation by vermin.

The requirements according to ETAG 009, section 6.7.1.3 are met satisfactory.

### 3.7.2 Resistance to normal use damage

#### Incorporation of ducts

The instructions in the installation guide of the ETA holder are appropriate to produce horizontal perforations through the walls, which are necessary for the passing through ducts.

#### Fixings for hanging objects

The anchorage of fixings for hanging objects in the shuttering leaves is not possible. Such fixings only shall be anchored in the concrete core.

## 4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to the legal base

In accordance with guideline for European technical approval ETAG 009, June 2002, used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011, the applicable European legal act is: [98/279/EC] as amended by European legal act [2001/596/EC].

The system to be applied is: 2+

## 5 Technical details necessary for the implementation of the AVCP system, as provided for the applicable EAD

Technical details necessary for the implementation of the AVCP system are laid down in the control plan, deposited with Deutsches Institut für Bautechnik.

Issued in Berlin on 17 July 2017 by Deutsches Institut für Bautechnik

BD Dipl.-Ing. Andreas Kummerow  
Head of Department

*beglaubigt:*  
Dr.-Ing. Alex

## Characteristics of shuttering kit

The "IZODOM 2000 POLSKA" system comprises five types of walls:

- "STANDARD",
- "PRINCE BLOCK"
- "KING BLOCK",
- "SUPER KING BLOCK",
- "SUPER KING BLOCK PLUS" and
- "UNIVERSAL",
- "UNIVERSAL PLUS".

These wall types are differentiated by:

- thickness of foam material in one of the shuttering walls,
- design of the elements and
- thickness of the concrete wall core.

All elements are available in two types of foam material:

- Styropor F415E (white expanded polystyrene) and
- Neopor F2400 (graphite-enriched expanded polystyrene)

In every type of wall standard shuttering elements, special shuttering elements and accessory parts are included. Special shuttering elements are height adjuster elements, angel joint elements (45°) for inner and outer corners, hinge elements to realise walls with arbitrary angles, header elements (for lintels), floor support elements and door head elements. Accessory parts are auxiliary elements, height adjuster elements, trimming strips, plugs and closing elements as well as the ties.

### 1 Standard shuttering elements

The system contains the following types of shuttering elements:

- |         |  |
|---------|--|
| MC      | shuttering elements completely made of EPS (Styropor or Neopor)  |
| MCF     | shuttering elements with shuttering leaves of EPS (Styropor or Neopor) and <u>embedded</u> plastic ties (see Annex A 112- A114, A117, A119) to connect both shuttering leaves                      |
| MCFU    | shuttering elements with shuttering leaves of EPS (Styropor or Neopor) and <u>dismountable</u> plastic ties (see Annexes A110, A111, A118) to connect both shuttering leaves                       |
| MCFU-St | shuttering elements with shuttering leaves of EPS (Styropor or Neopor) and <u>dismountable</u> ties of plastic parts and steel wires (see Annexes A115 and A116) to connect both shuttering leaves |

Shuttering elements MC form walls of the grid type and shuttering elements MCF, MCFU and MCFU-St form walls of the continuous type according to ETAG 009, section 2.2. The main difference between the shuttering elements MCF and MCFU is that shuttering elements MCF are delivered to the site in form of completed shuttering elements meanwhile elements MCFU and MCFU-St are delivered on site in single parts (shuttering leaves and ties) and are completed to shuttering elements before sticking together the formwork. In Table 1 the main dimensions of the different shuttering element types in dependence on the wall types are given. The two numbers after the above explained shuttering element type nomination (MC, MCF, MCFU, MCFU-St) prescribes the length of the element in [m] and the thickness of the element in [cm].

Table 1: Main dimensions of the standard shuttering elements for different wall types

Permanent shuttering kit "IZODOM 2000 POLSKA"	Annex A1 Page 1 of 6
Characteristics of shuttering kit	

Wall type	Thickness [mm] of			Type of shuttering element	Annex
	inner shuttering leaf	concrete core	outer shuttering leaf		
<b>STANDARD</b>	50	150	50	MC 1/25 MC 2/25 MCF 1/25	A2 A3 A4
	40	70	40	MCF 1/15	A6
<b>PRINCE BLOCK</b>	50	150	100	MC 2/30	A18
<b>KING BLOCK</b>	50	150	150	MC 1/35 MC 2/35	A27 A28
<b>SUPER KING BLOCK</b>	50	150	250	MC 1/45 MC 2/45	A41 A42
<b>SUPER KING BLOCK PLUS</b>	50	200	50	MCF 1/30	A51
	50	200	250	MCF 1/50	A52
<b>UNIVERSAL</b>	50	150	50	MCFU 1/25 MCFU 2/25 MCFU-St 1/25 MCFU-St 2/25	A53 A54 A63 A64
				100	MCFU 1/30 MCFU 2/30 MCFU-St 1/30 MCFU-St 2/30
	50	150	150		MCFU 1/35 MCFU 2/35 MCFU-St 1/35 MCFU-St 2/35
				250	MCFU 1/45 MCFU 2/45 MCFU-St 1/45 MCFU-St 2/45
	50	400	50		MCFU 1/50 MCFU 2/50 MCFU-St 1/50 MCFU-St 2/50
	<b>UNIVERSAL PLUS</b>	50	200	50	MCFU 2/30+
50		200	100	MCFU 2/35+	A74
50		200	150	MCFU 2/40+	A75
50		200	250	MCFU 2/45+	A76

## 2 Special shuttering elements

For all wall types special shuttering elements are available. Additional to the shuttering type nomination (MC, MCF, MCFU and MCFU-St) for special shuttering elements the following nominations are used:

ML	Header elements (for lintels)
MLI / MLA	Door head elements
MP	Floor support elements
MH	Height adjuster elements
MHF	Height adjuster elements for hinge elements

Permanent shuttering kit "IZODOM 2000 POLSKA"

Characteristics of shuttering kit

Annex A1  
Page 2 of 6

For the description of the angel joint elements the following additional nominations are used:

L left  
R right  
I inner corner  
A outer corner

Table 2: Main dimensions of the special shuttering elements for different wall types

Wall type	Thickness [mm] of			Type of special shuttering element	Annex
	inner shuttering leaf	concrete core	outer shuttering leaf		
<b>STANDARD</b>	50	150	50	MCF 0.7/25 ML 1/25 MP 1/25 MH 1/25 MHF 0.7/25 MLA 1.2/25 MC25 E45 LA/RI MC25 E45 RA/LI MCB 1/25 MH 1/15	A5 A7 A8 A9 A10 A11 A12 A13 A14 A15
<b>PRINCE BLOCK</b>	50	150	100	ML 1/30 MH 1/30 MP 1/30 MLA 1,2/30 MCFU30 E90 LA MCFU30 E90 RA MCFU30 E90 RI MCFU30 E90 LI	A19 A20 A21 A22 A23 A24 A25 A26
<b>KING BLOCK</b>	50	150	150	ML 1/35 MP 1/35 MLA 1,2/35 MCFU35 E45 RA MCFU35 E45 LA MCF 35EI/L MCFU35 E45 RI MCFU35 E90 LA MCFU35 E90 RA MCFU35 E90 LI MCFU35 E90 RI	A29 A30 A31 A32 A33 A34 A35 A37 A38 A39 A40
<b>SUPER KING BLOCK</b>	50	150	250	ML 1/45 MP 1/45 MH 1/45 MLA 1,2/45 MCFU45 E90 LA MCFU45 E90 RA MCFU45 E90 RI MCFU45 E90 LI	A43 A44 A45 A46 A47 A48 A49 A50

Permanent shuttering kit "IZODOM 2000 POLSKA"

Characteristics of shuttering kit

Annex A1  
Page 3 of 6

### 3 Accessory parts

#### 3.1 Auxiliary elements MD 1/10 (Annex A104)

#### 3.2 Height adjuster elements MHD 1/10 (Annex A105)

#### 3.3 Trimming strips (Annex A106)

#### 3.4 Plugs (Annexes A95 and A96)

#### 3.5 Closing elements (Annexes A97 to A103)

OC (Annex A97)	to close the narrow sides of the shuttering elements of the systems with 150 mm concrete core thickness ("STANDARD", "KING BLOCK", "SUPER KING BLOCK" and "UNIVERSAL" (MCFU x/25, MCFU x/35, MCFU-St x/25 and MCFU-St x/35))
OC BIS (Annex A98)	the same as OC but resisting the concrete pressure without additional support,
OC 0.2/1 (Annex A99)	to close the narrow sides of the shuttering elements of the "SUPER KING BLOCK PLUS" system
OC 0.2/2 (Annex A100)	the same as OC 0.2/1 but resisting the concrete pressure without additional support
OC 0.25/1 (Annex A101)	to close the narrow sides of the shuttering elements of the "SUPER KING BLOCK PLUS" system
OC 0.25/2 (Annex A102)	the same as OC 0.25/1 but resisting the concrete pressure without additional support
OC 0.4/2 (Annex A103)	to close the narrow sides of the shuttering elements of the "UNIVERSAL" system with 40 cm thickness of concrete core (MCFU x/50 and MCFU-St x/50).

#### 3.6 Ties

In Table 3 an overview is given which ties are used for which shuttering elements:

**Table 3:** Correlation between ties and shuttering elements

Tie in Annex	STANDARD	PRINCE BLOCK	KING BLOCK	SUPER KING BLOCK	BLOCK PLUS	UNIVERSAL	UNIVERSAL PLUS
A110 MCFU	25 E90 LA/RI 25 E90 RA/LI	30 E90 LA 30 E90 LA 30 E90 LI 30 E90 RI	35 E45 LA 35 E45 RA 35 E45 LI 35 E45 RI 35 E90 LA 35 E90 RA 35 E90 LI 35 E90 RI	45 E90 LA 45 E90 LA 45 E90 LI 45 E90 RI		1/25 2/25 1/30 2/30 1/35 2/35 1/45 2/45	
A111 MCFU						1/50 2/50	
A112 MCF	1/15						
A113 MCF	1/25 2/25 25 E45 LA/RI 25 E45 RA/LI						
A114 MCF					1/30+ 1/50+		

Permanent shuttering kit "IZODOM 2000 POLSKA"

Characteristics of shuttering kit

Annex A1  
Page 4 of 6

Tie in Annex	STANDARD	PRINCE BLOCK	KING BLOCK	SUPER KING BLOCK	BLOCK PLUS	UNIVERSAL	UNIVERSAL PLUS
A115 MCFU-St						1/25 2/25 1/30 2/30 1/35 2/35 1/45 2/45	
A116 MCFU-St						1/50 2/50	
A 117 MCF							2/30+ 2/35+ 2/40+ 2/50+
A 118 MCFU							30+ E90 RA/LI 30+ E45 LA/RI 35+ E90 LA 35+ E90 RA 35+ E90 RI 35+ E90 LI 40+ E90 LA 40+ E90 RA 40+ E90 RI 40+ E90 LI 50+ E90 LA 50+ E90 RA 50+ E90 RI 50+ E90 LI
A119 MCF							2/35++ 2/40++ 2/45++ 2/55++

#### 4 Material

##### 4.1 Standard shuttering elements and special shuttering elements

The standard shuttering elements and special shuttering elements correspond to the information and drawings given in the Annexes (see Table 1).

For the shuttering leaves, expanded polystyrene made of polystyrene particle foam EPS-EN 13163-T(2)-L(3)-W(2)-S(2)-P(5)-DS(70,-)3-BS200-DS(N)5-TR100 according to EN 13163 is used.

More information to the material characteristics, dimensions and tolerances of the shuttering elements are given in the technical documentation<sup>1</sup> of the ETA.

<sup>1</sup> The technical documentation of the ETA is deposited at DIBt and, as far as relevant for the tasks of the approved bodies involved in the attestation of conformity procedure, is handed over to the approved bodies.

Permanent shuttering kit "IZODOM 2000 POLSKA"	Annex A1 Page 5 of 6
Characteristics of shuttering kit	

#### 4.2 Accessory parts

Auxiliary elements, height adjuster elements, trimming strips, plugs and closing elements correspond to the drawings given in the Annexes (see sections 3.1 to 3.6). They are made of the same material as the shuttering leaves of the shuttering elements.


The ties correspond to the drawings given in the Annexes (see Table 3).

More information to the material characteristics, dimensions and tolerances of the accessory parts are given in the technical documentation of the ETA.

Permanent shuttering kit "IZODOM 2000 POLSKA"

Characteristics of shuttering kit

Annex A1  
Page 6 of 6

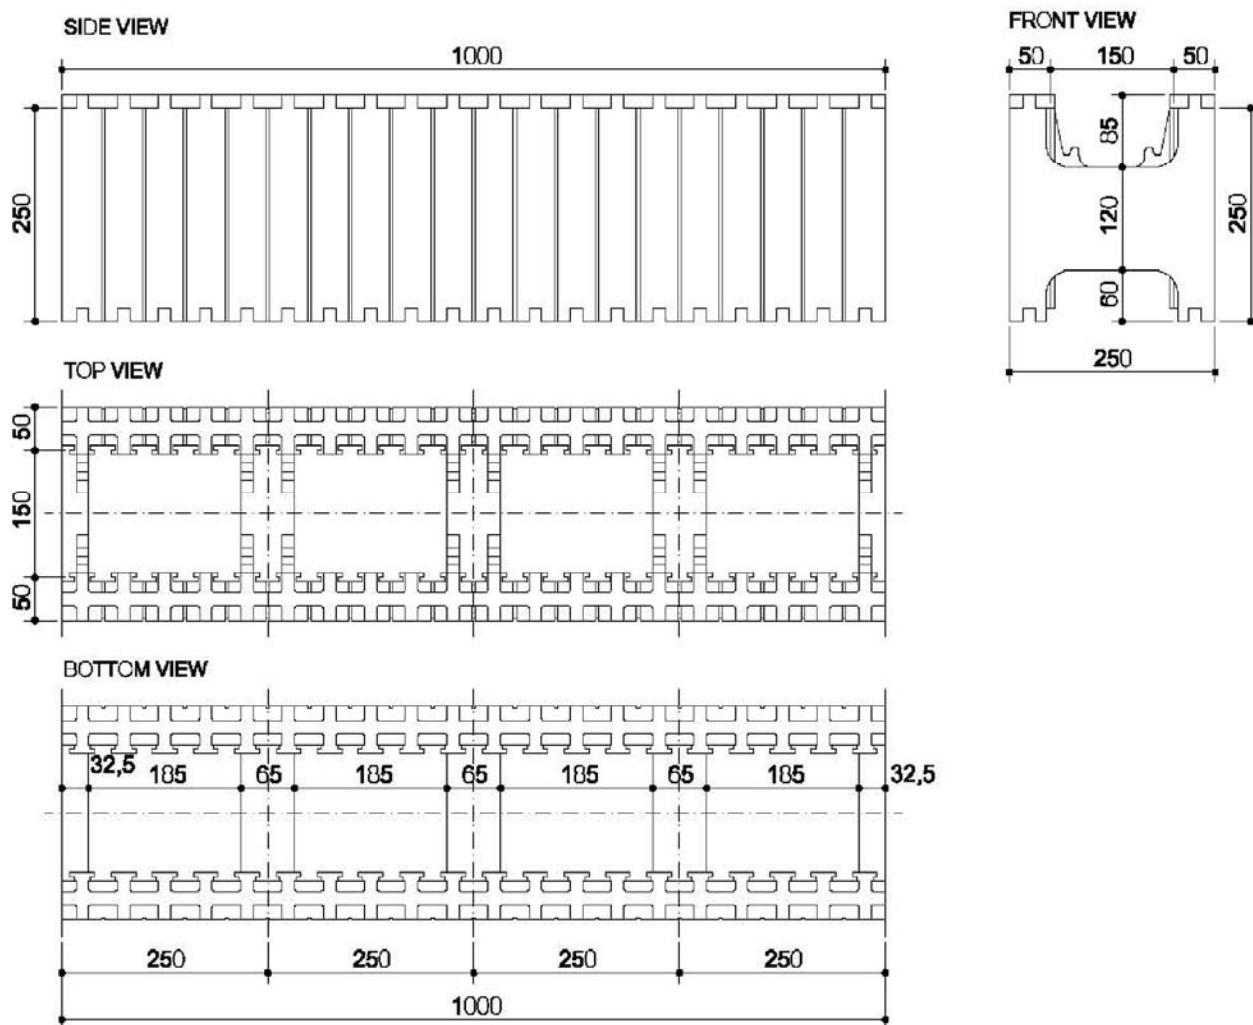


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Primary block MC 1/25  
100cm x 25cm x 25cm

Annex A2

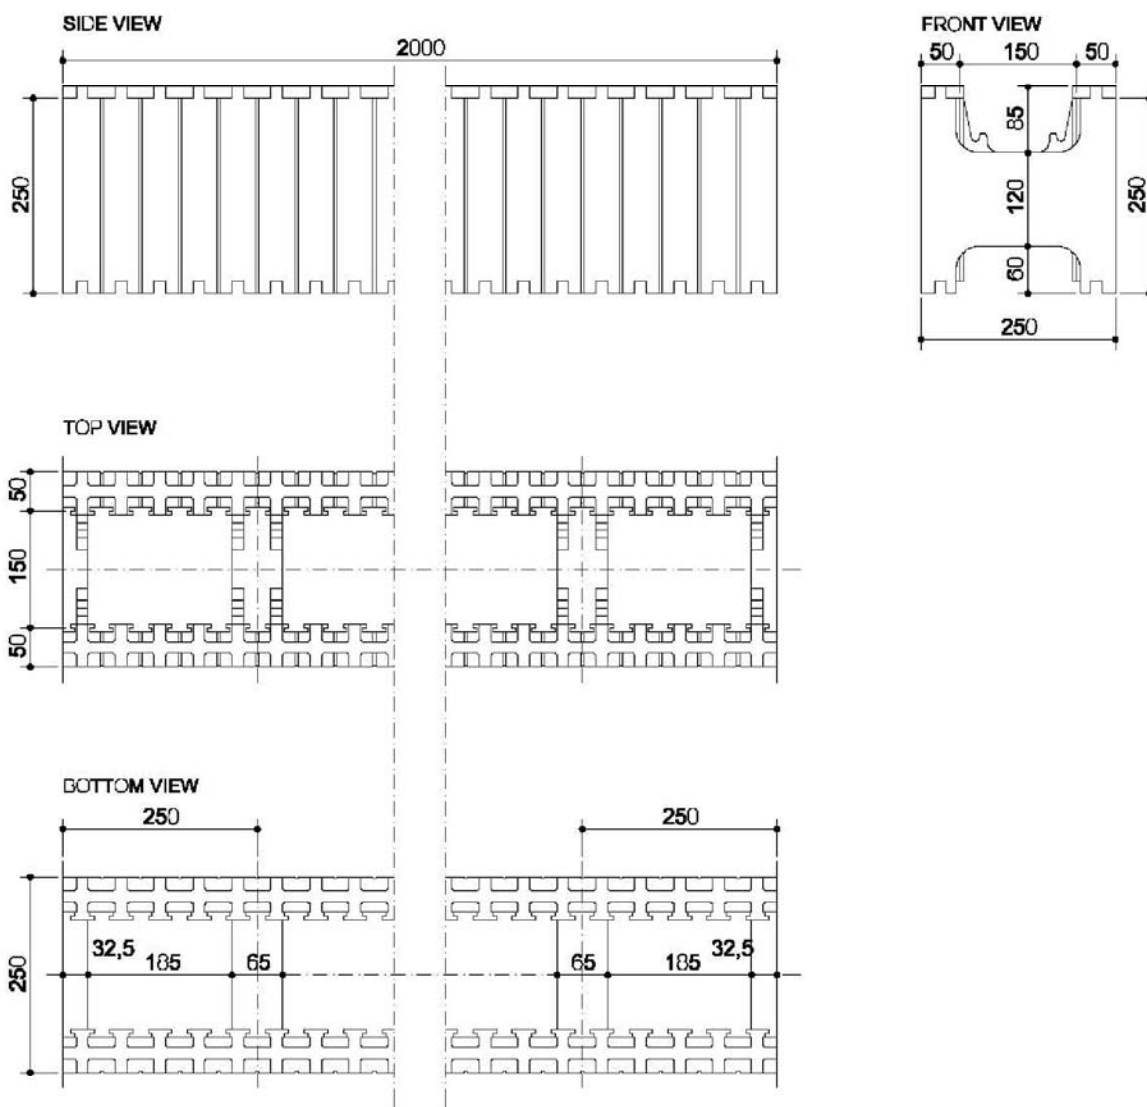


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Primary block MC 2/25  
200cm x 25cm x 25cm

Annex A3

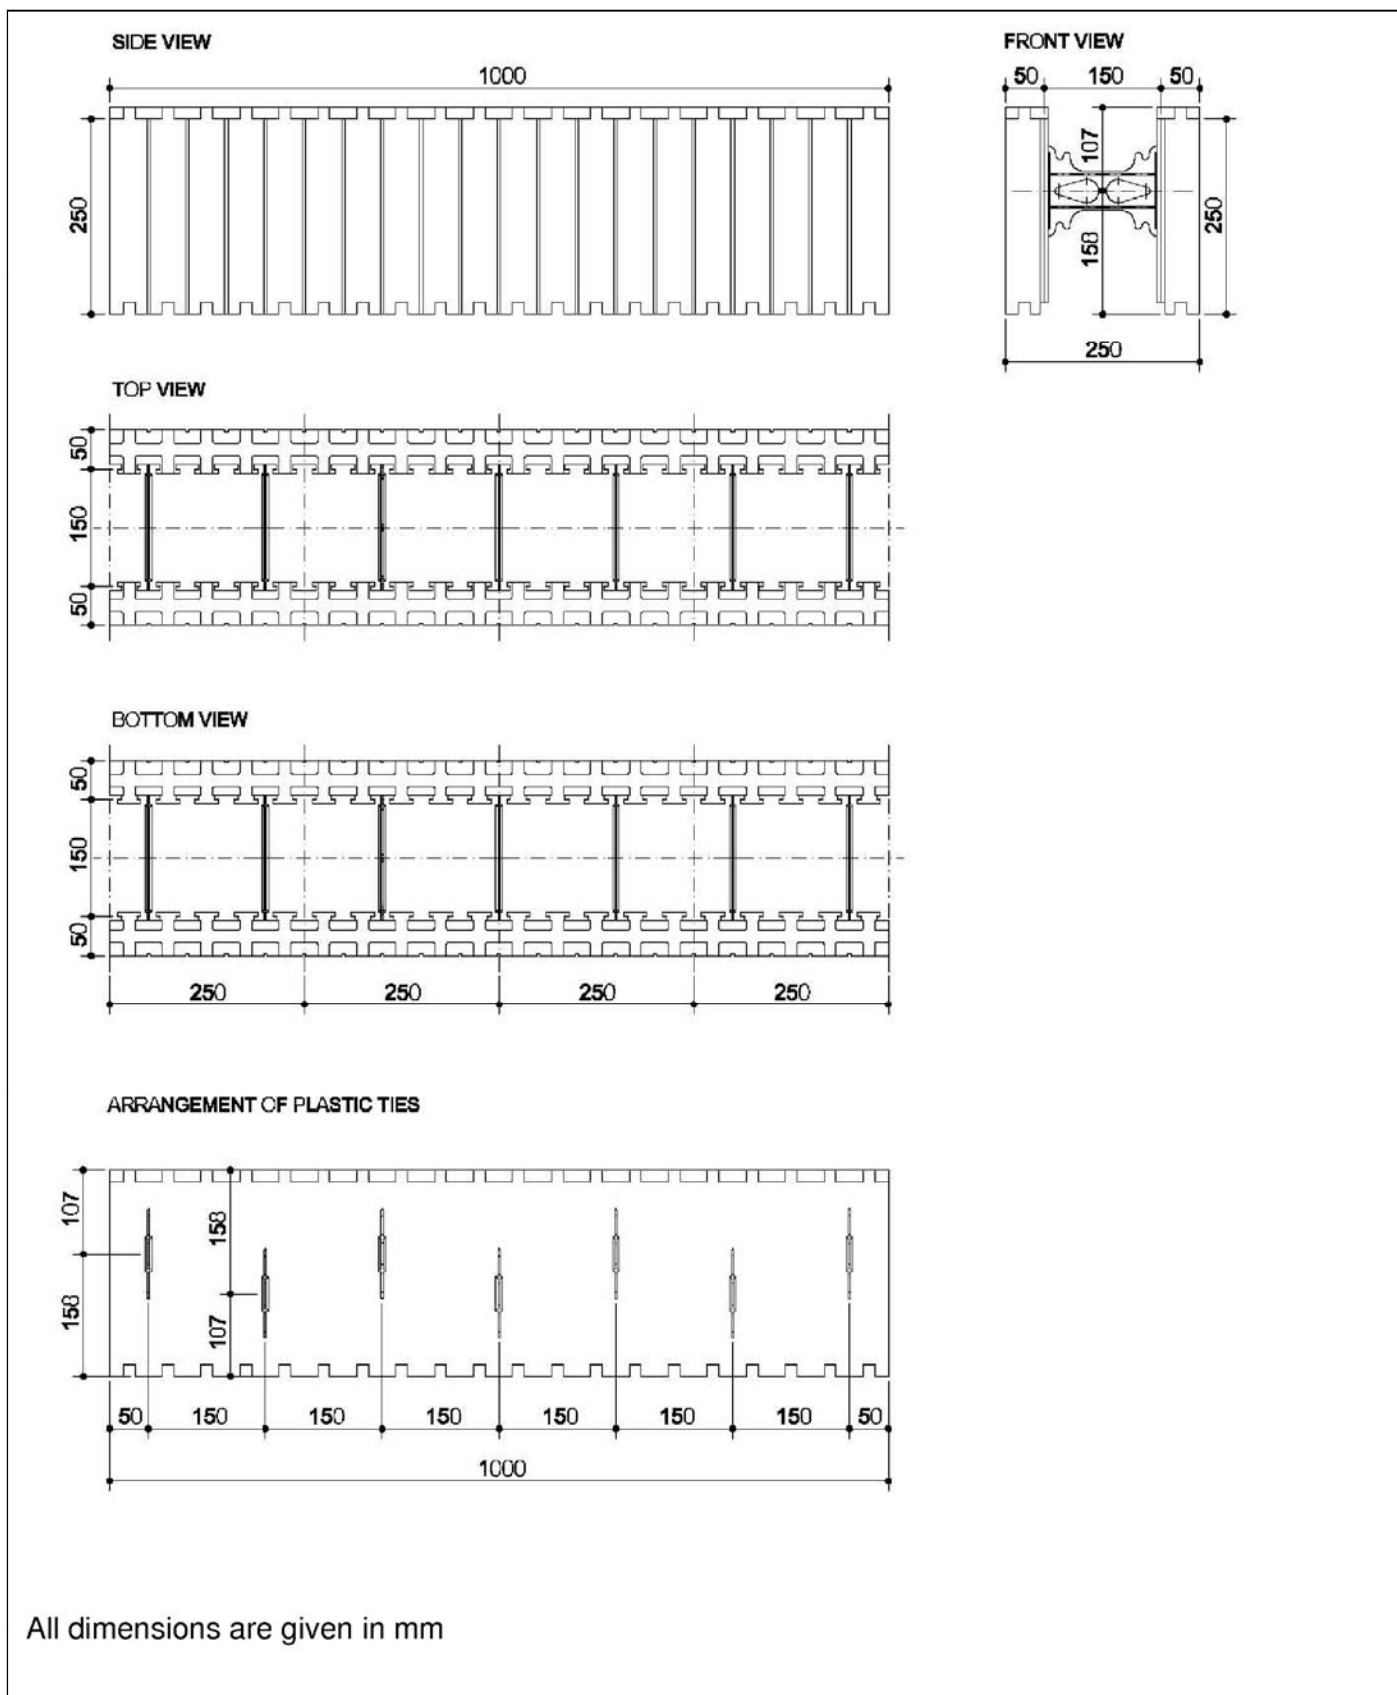


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Block with plastic tie MCF 1 /25  
100cm x 25cm x 25cm

Annex A4

English translation prepared by DIBt

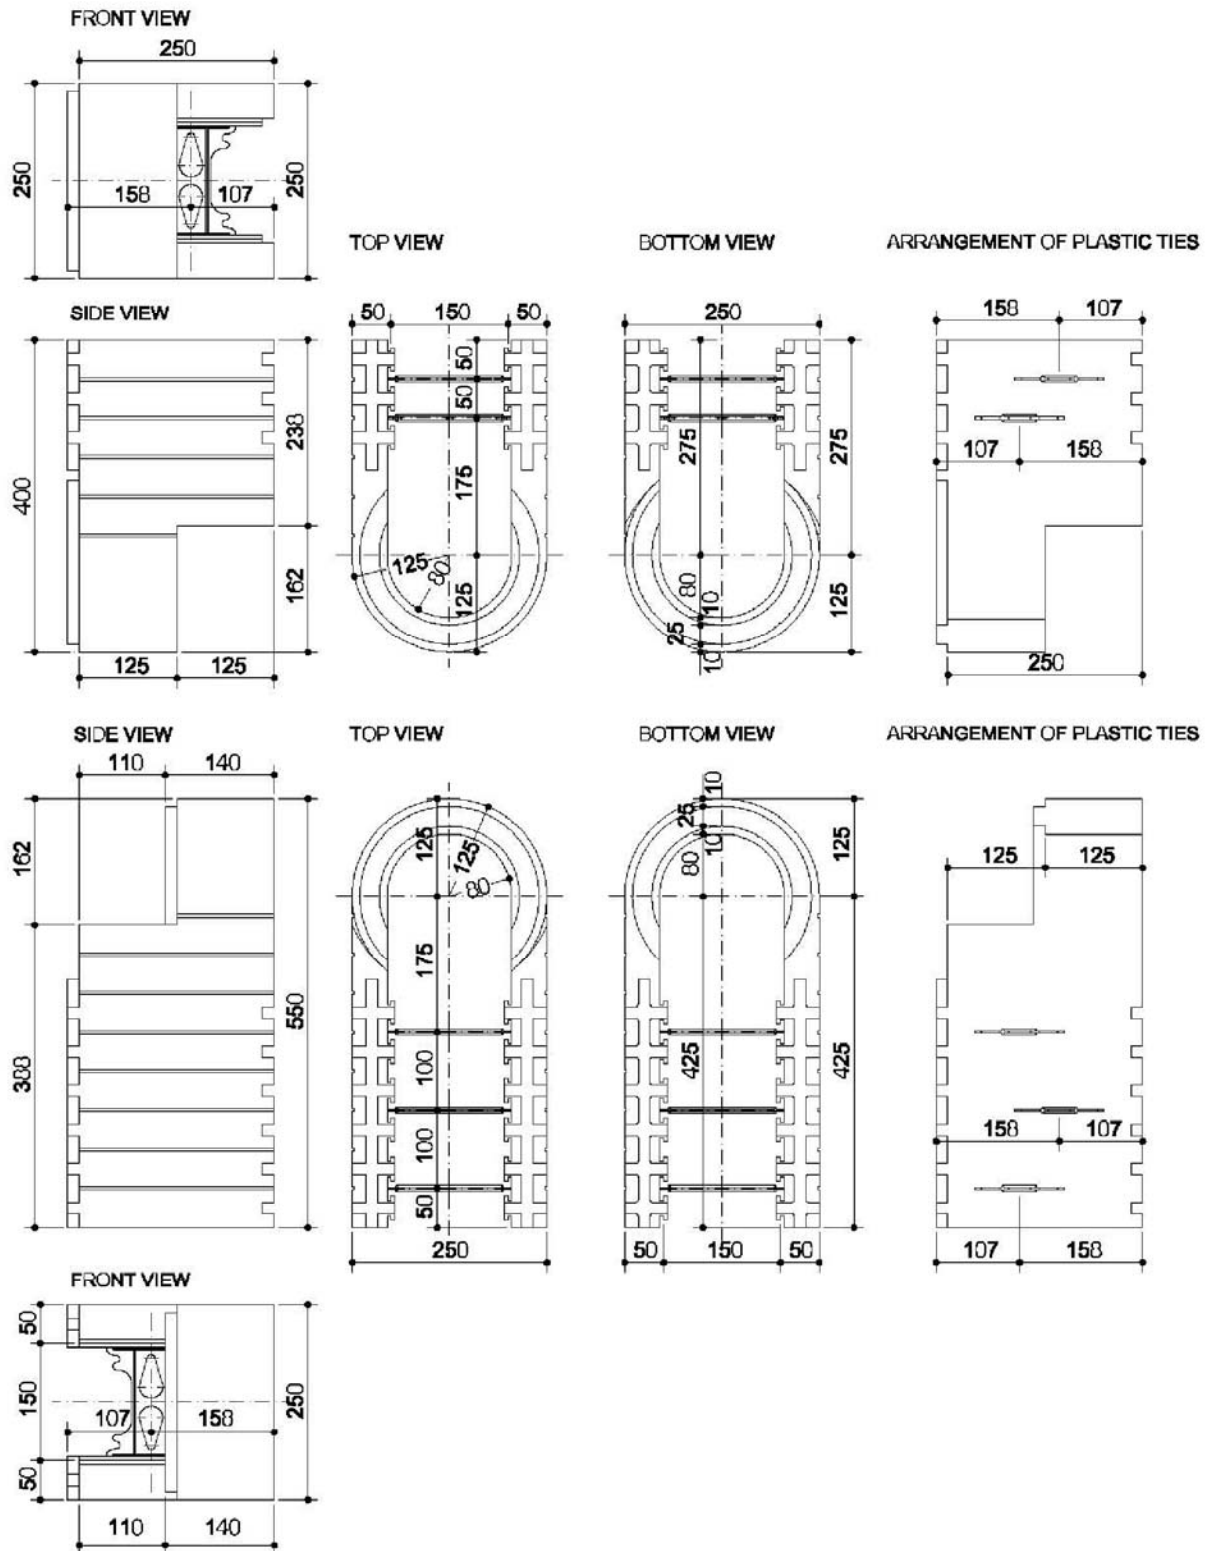


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Hinge element MCF 0,7/25  
70cm x 25cm x 25cm

Annex A5

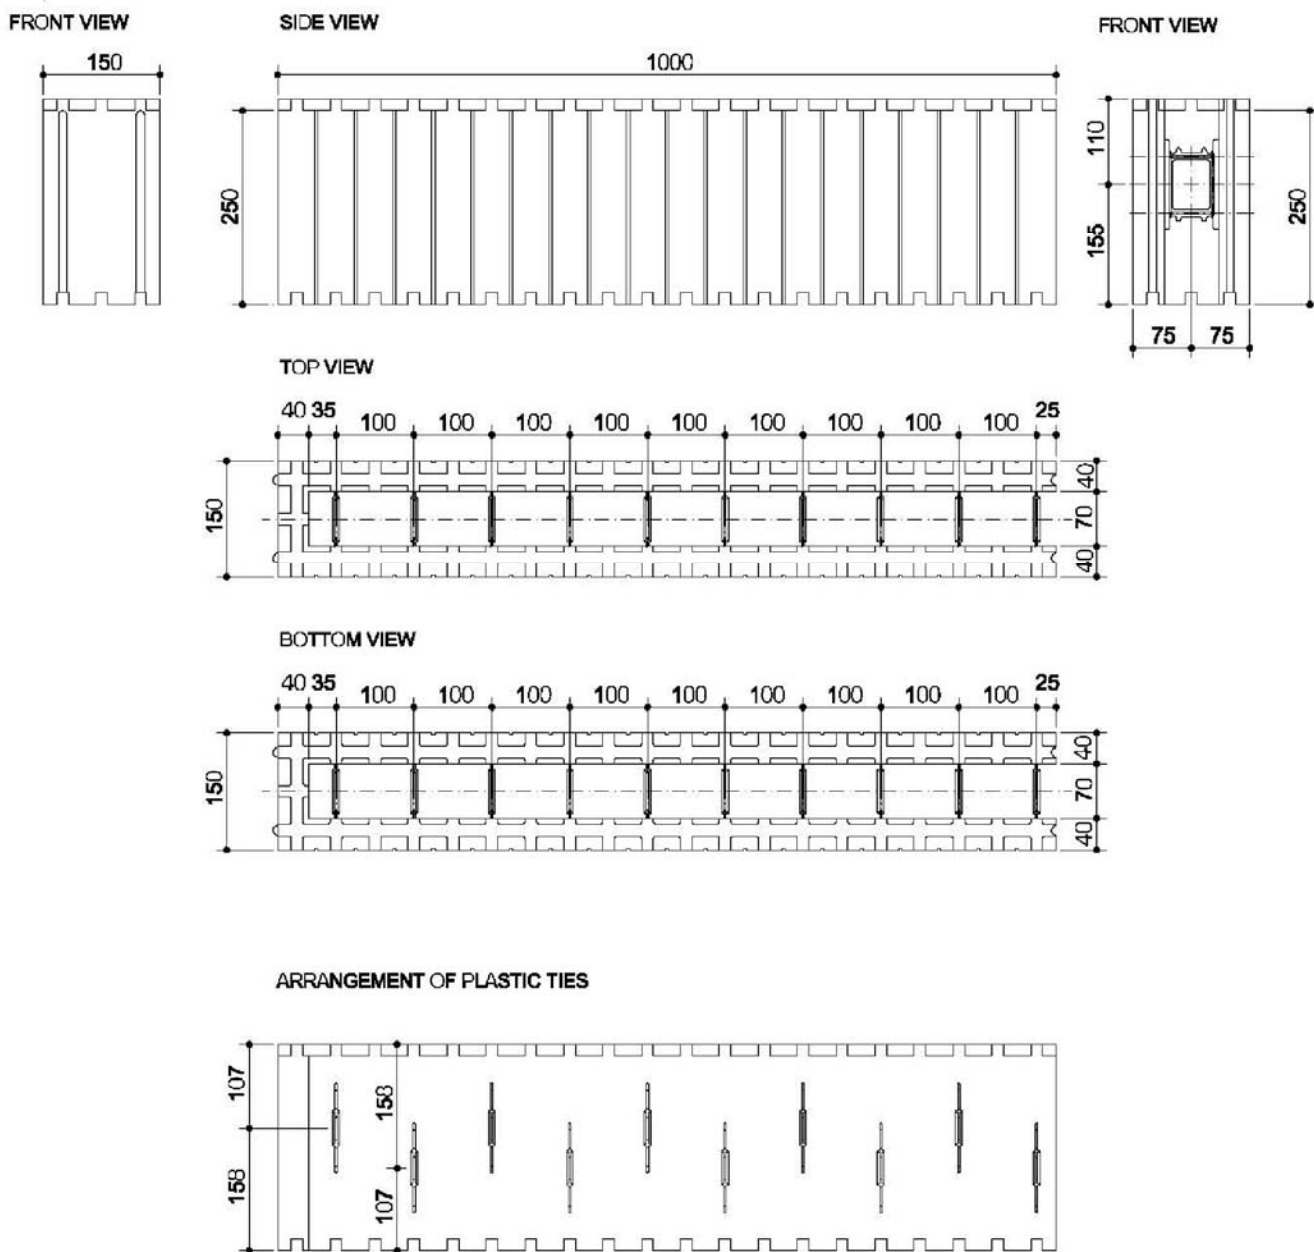


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Partition wall element MCF 1/15  
100cm x 15cm x 25cm

Annex A6

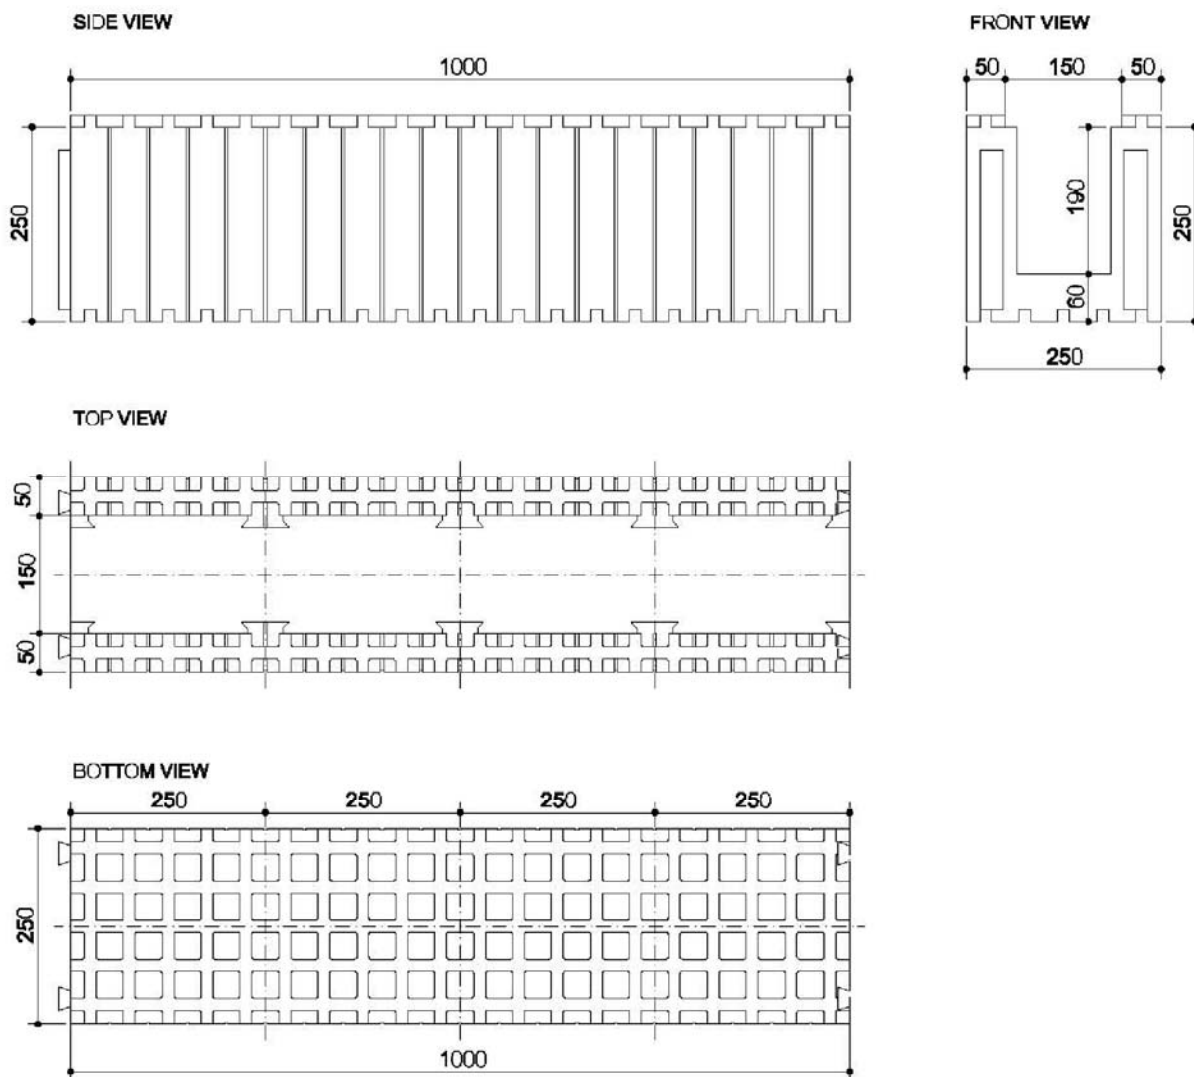


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Header block ML 1/25  
100cm x 25cm x 25cm

Annex A7

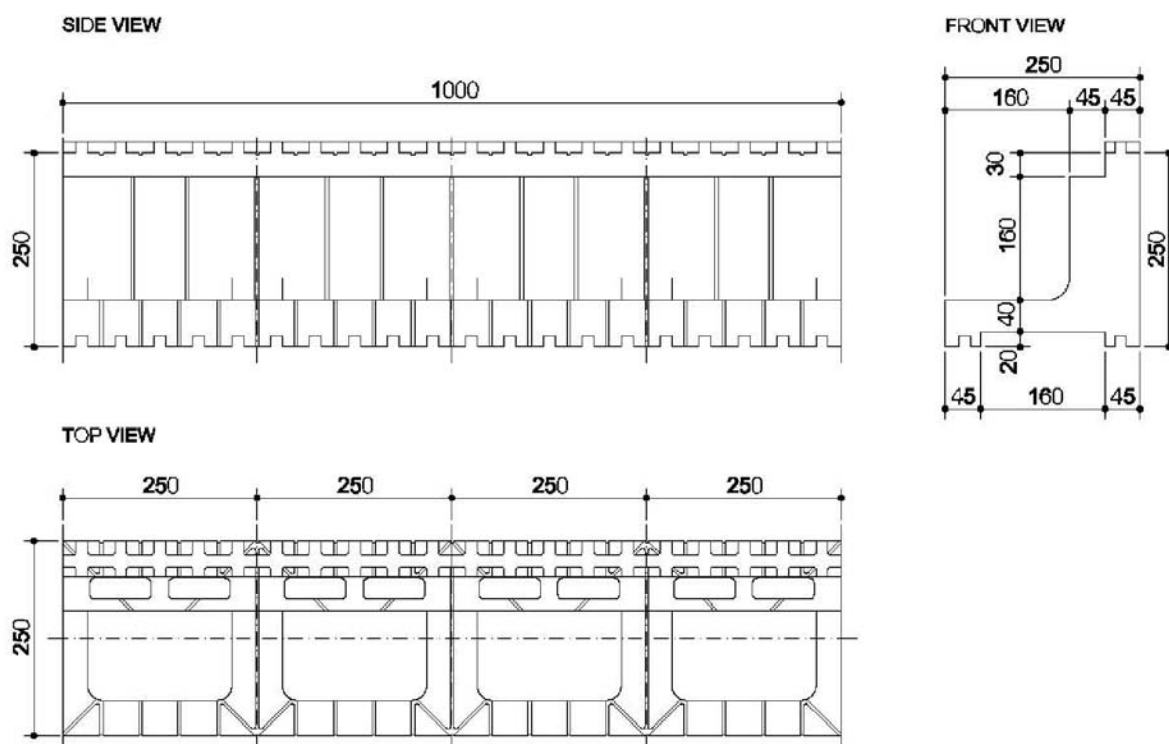


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Floor support element MP 1/25  
100cm x 25cm x 25cm

Annex A8

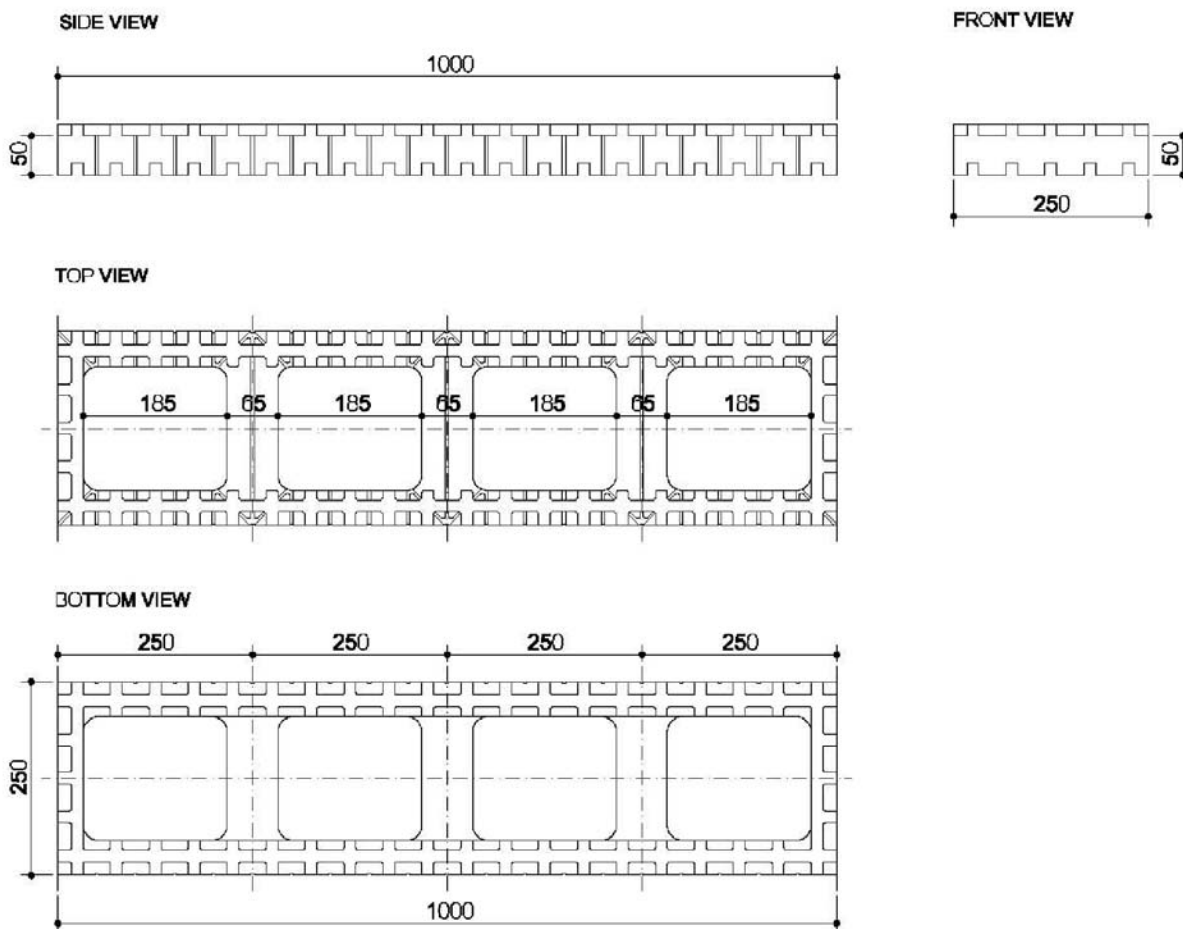


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Height adjuster MH 1/25  
100cm x 25cm x 5cm

Annex A9

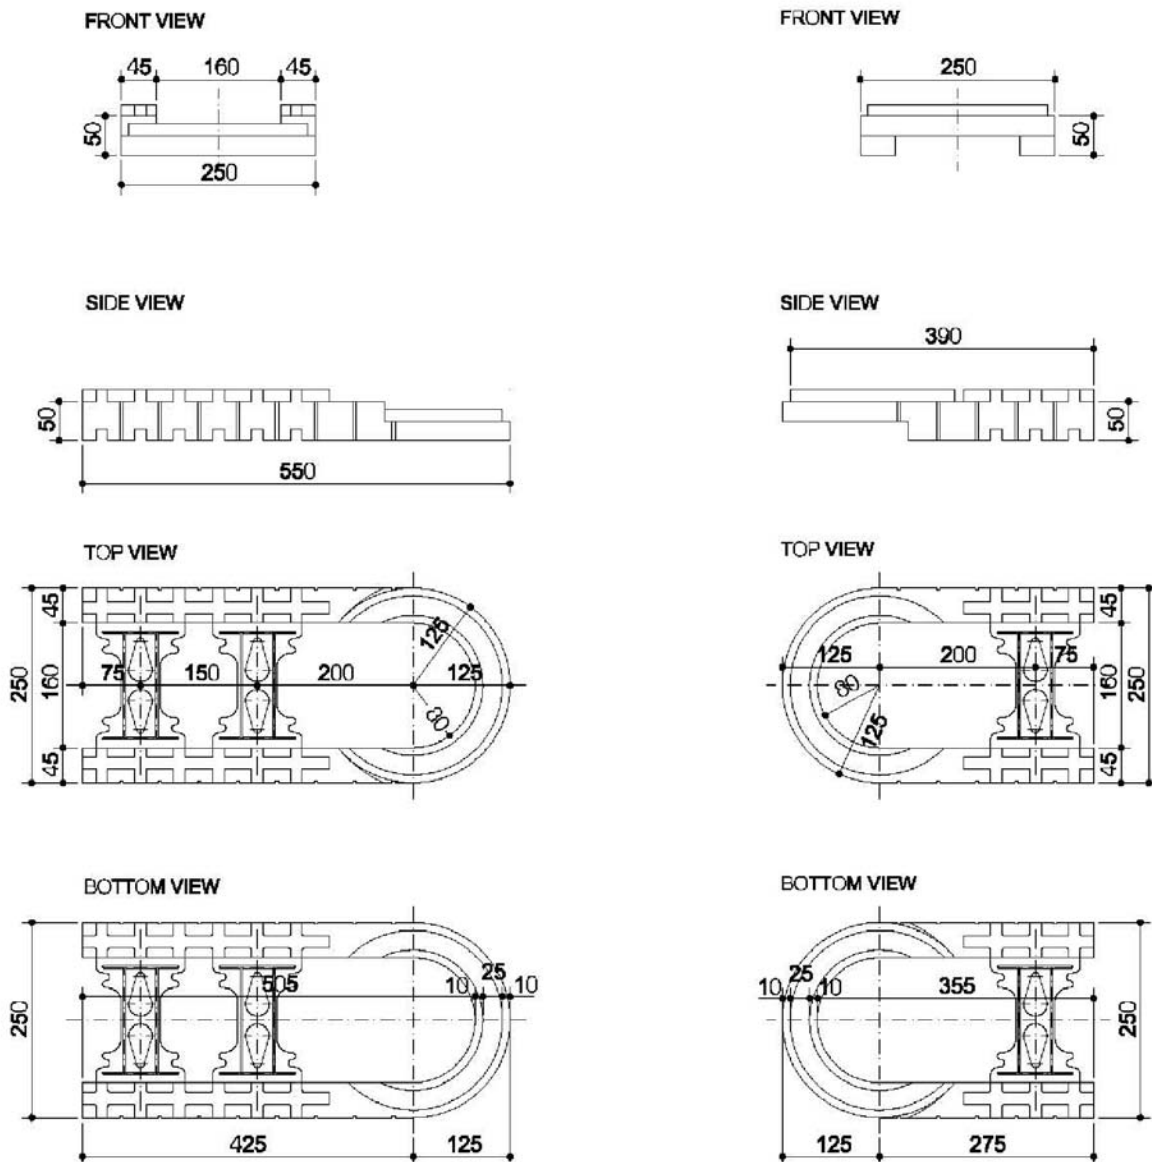


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Height adjuster of a hinge block MHF 0,7/25  
70cm x 25cm x 5cm

Annex A10



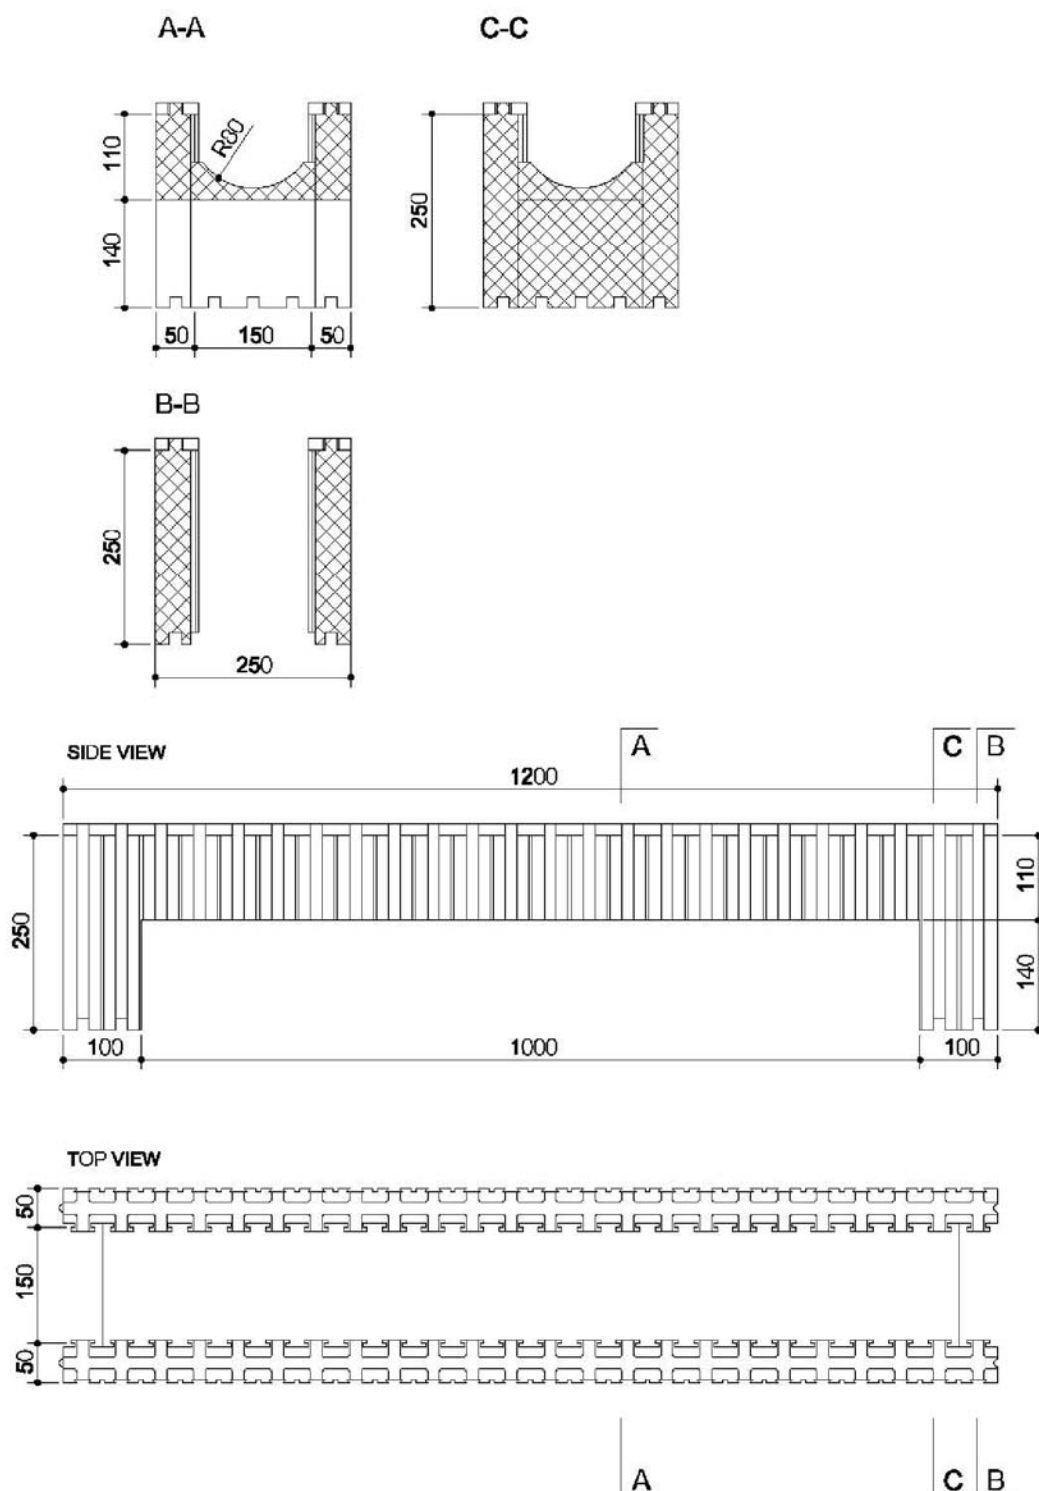


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Doorhead element MLA 1,2/25  
120cm x 25cm x 25cm

Annex A11

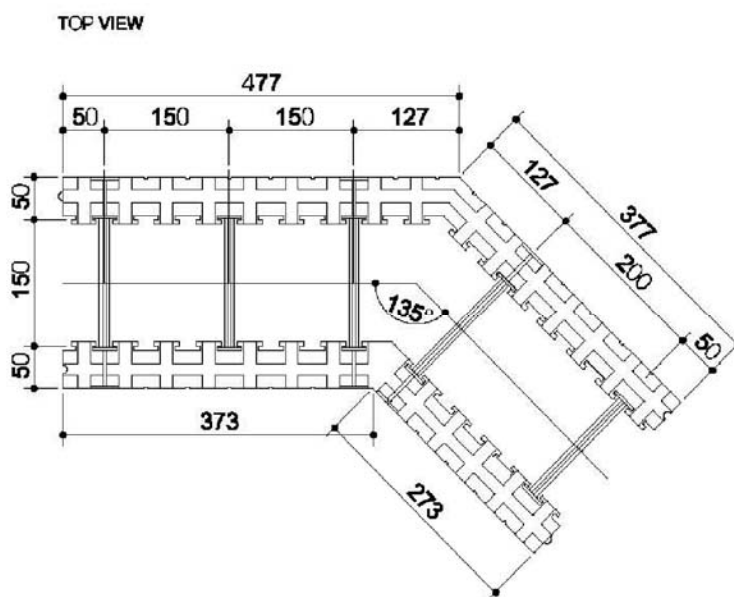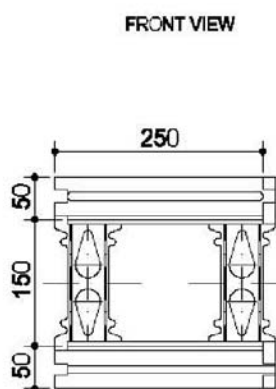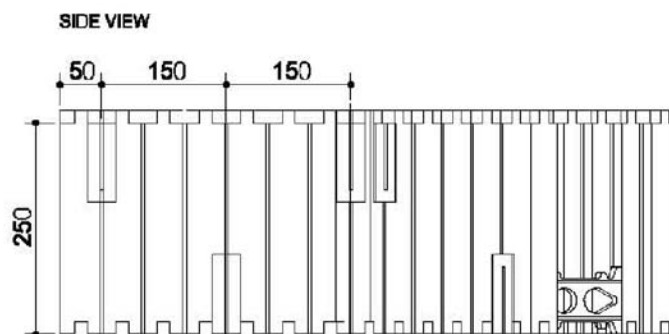


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
45° corner with plastic tie MCF25 E45 LA / RI  
85,4(64,6)cm x 25cm x 25cm (external left / internal right)

Annex A12

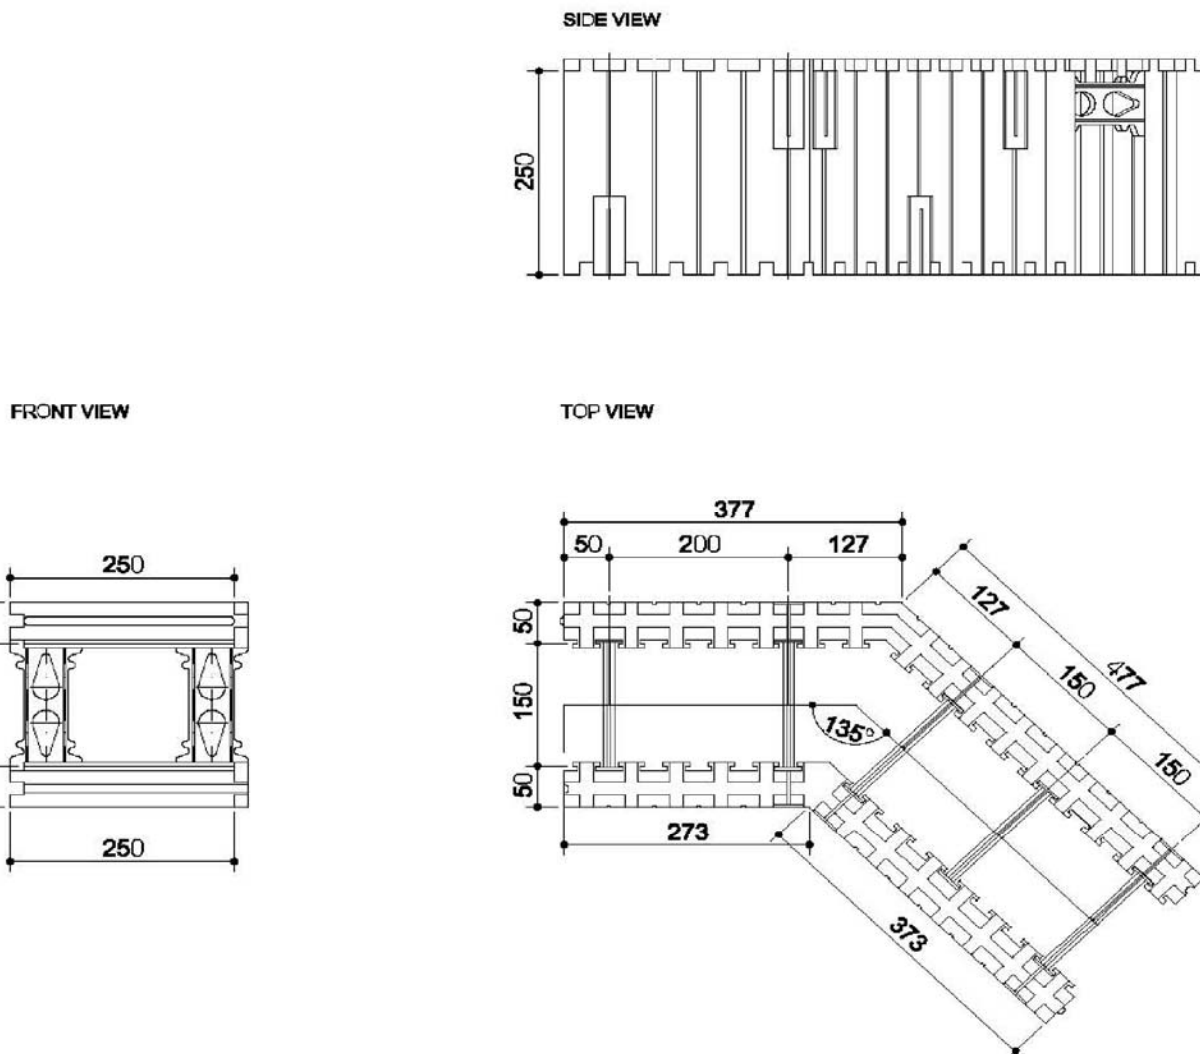


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
45° corner with plastic tie MCF25 E45 RA/ LI  
85,4(64,6)cm x 25cm x 25cm (external right / internal left)

Annex A13

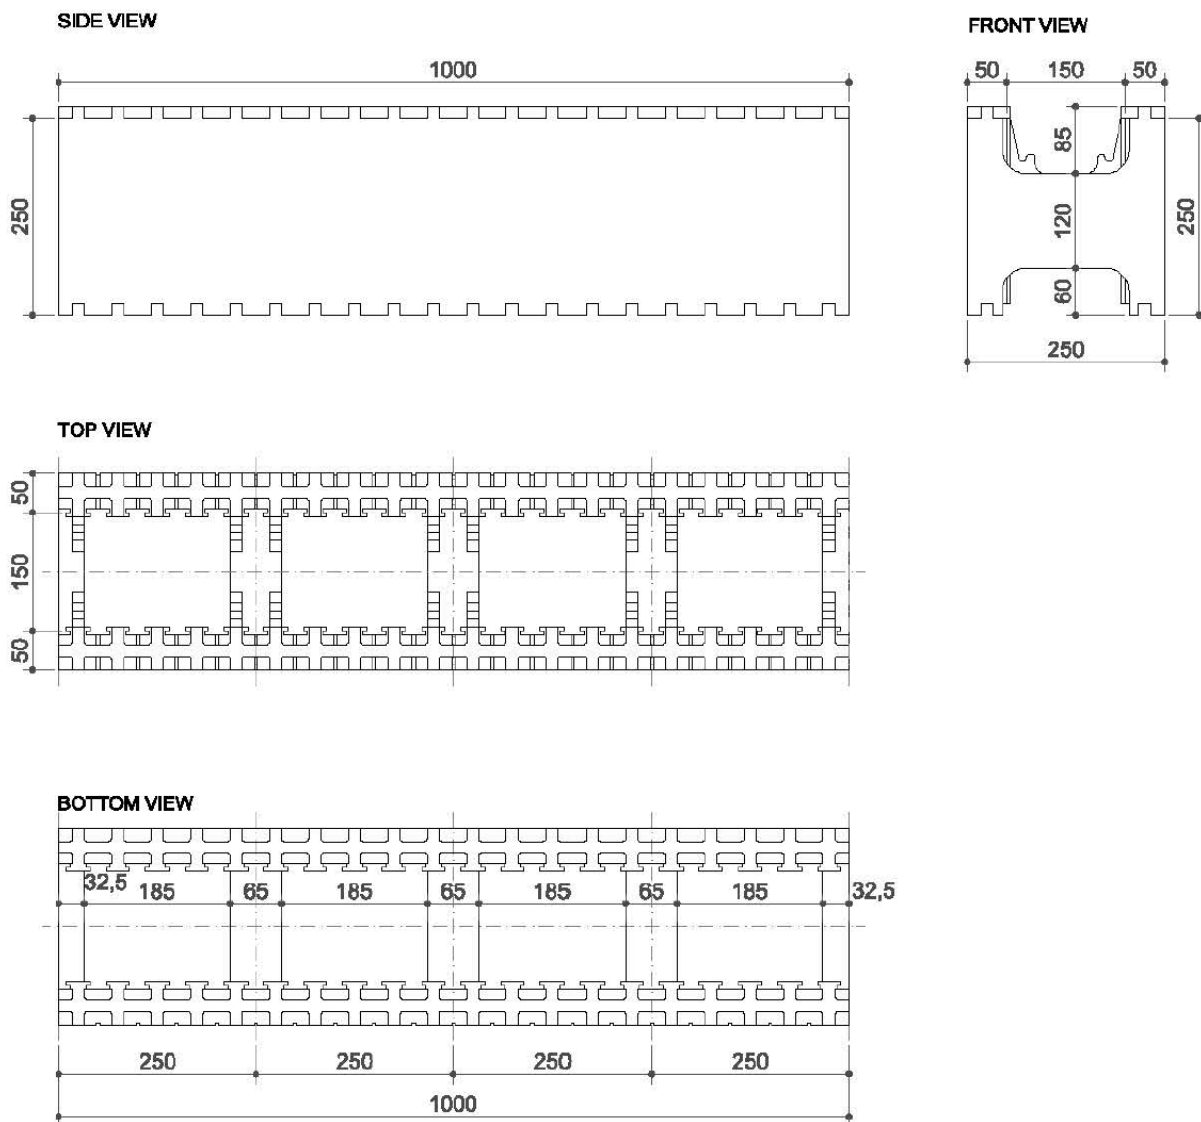


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM STANDARD  
Block for swimming pools MCB 1/25  
100cm x 25cm x 25cm

Annex A14

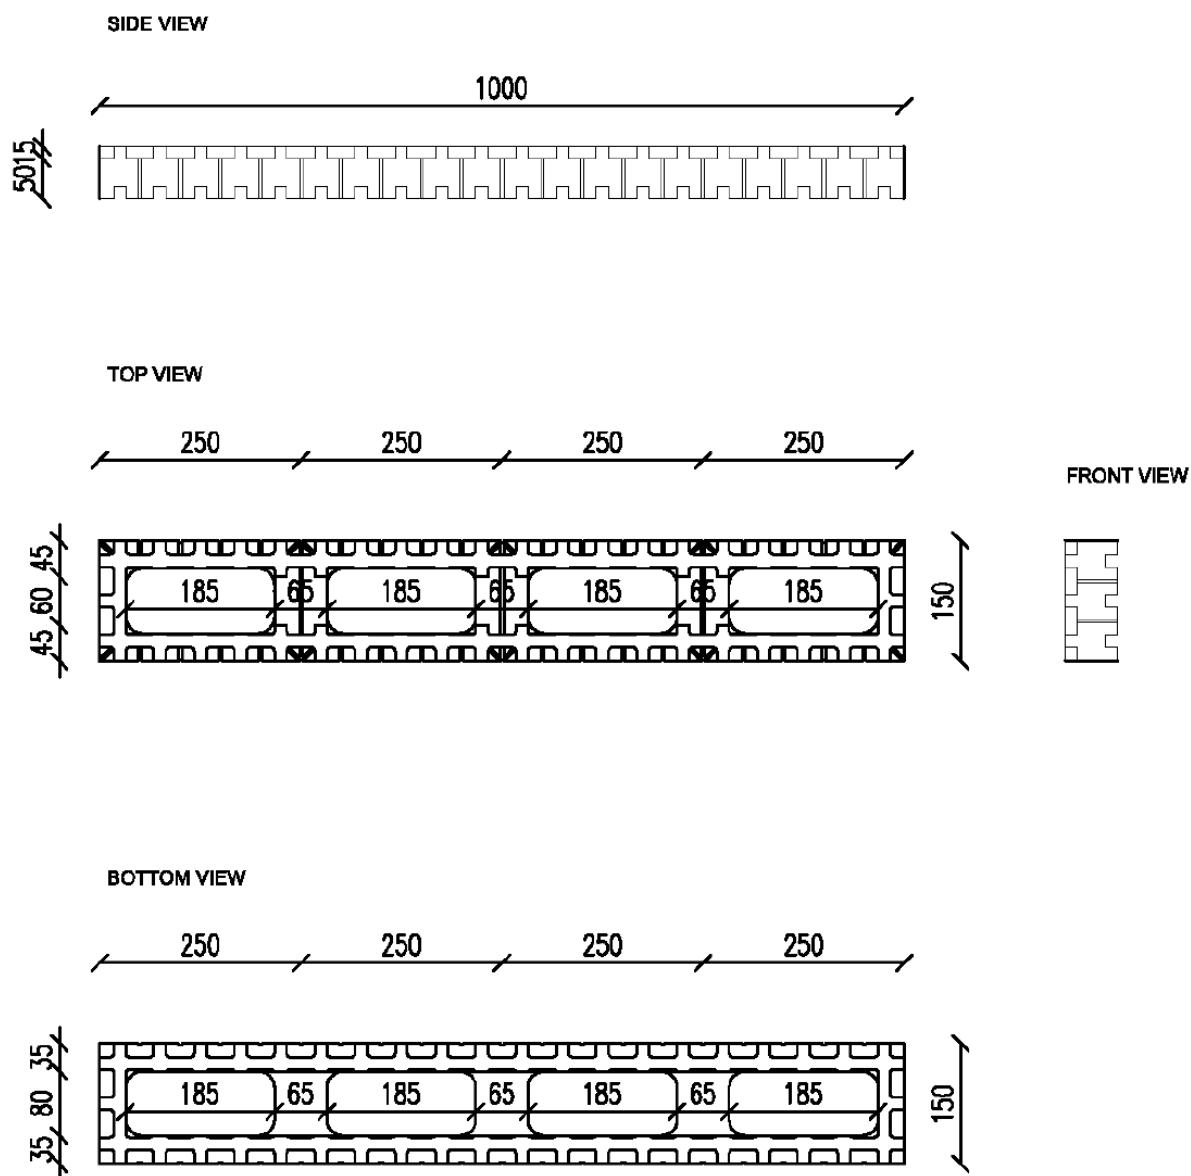


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


SYSTEM: "STANDARD"  
Height adapter for partition wall MH 1/15  
100cm x 5cm x 15cm

Annex A15


TOP VIEW

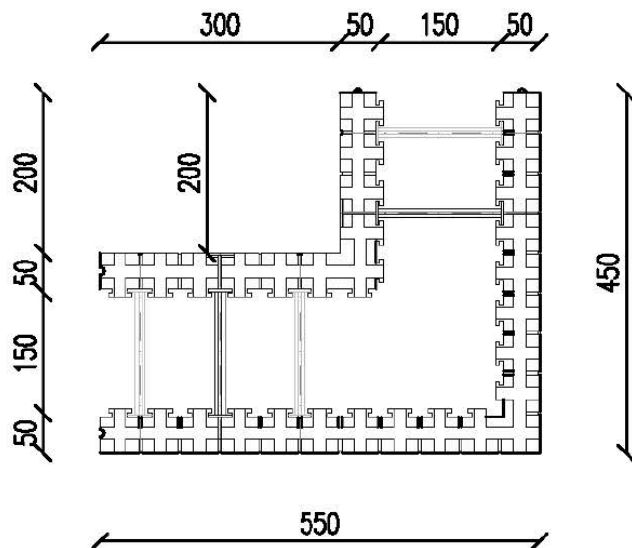

SIDE VIEW

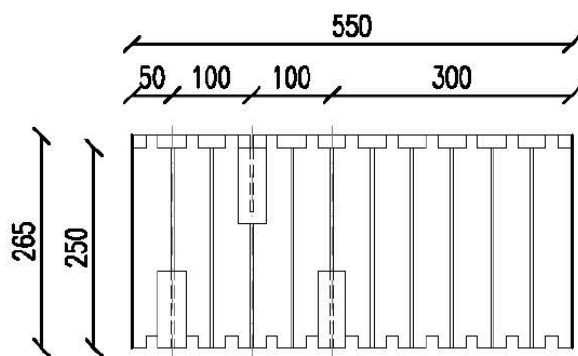

FRONT VIEW



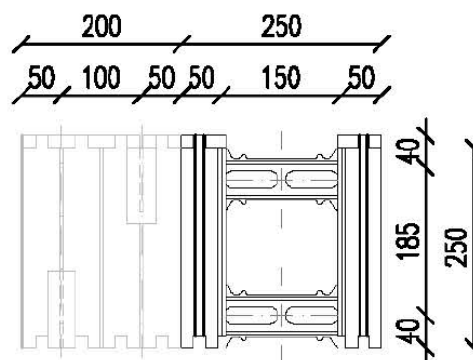


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
90° corner MCFU25 E90 RA / LI  
100(60)cm x 25cm x 25cm (external right / internal left)

Annex A16

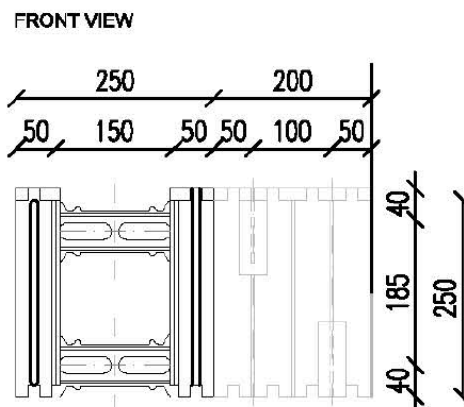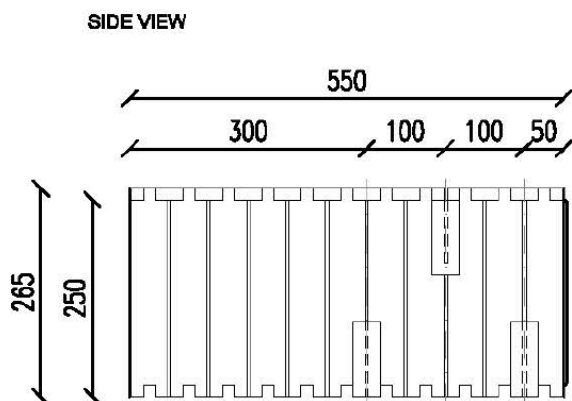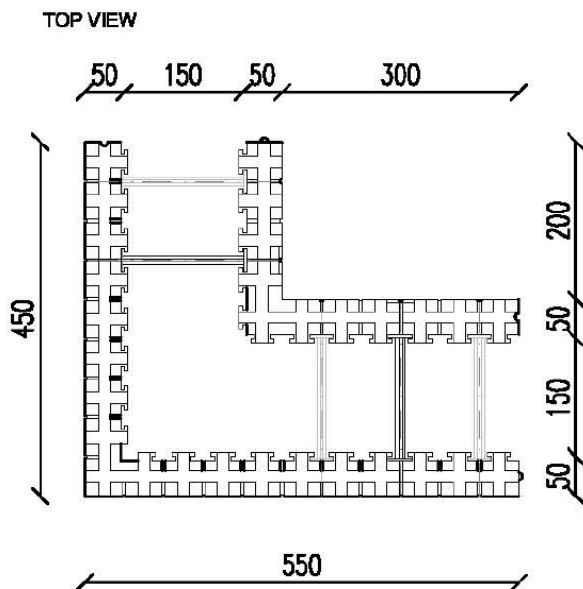


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
90° corner MCFU25 E90 LA / RI  
100(60)cm x 25cm x 25cm (external left / internal right)

Annex A17

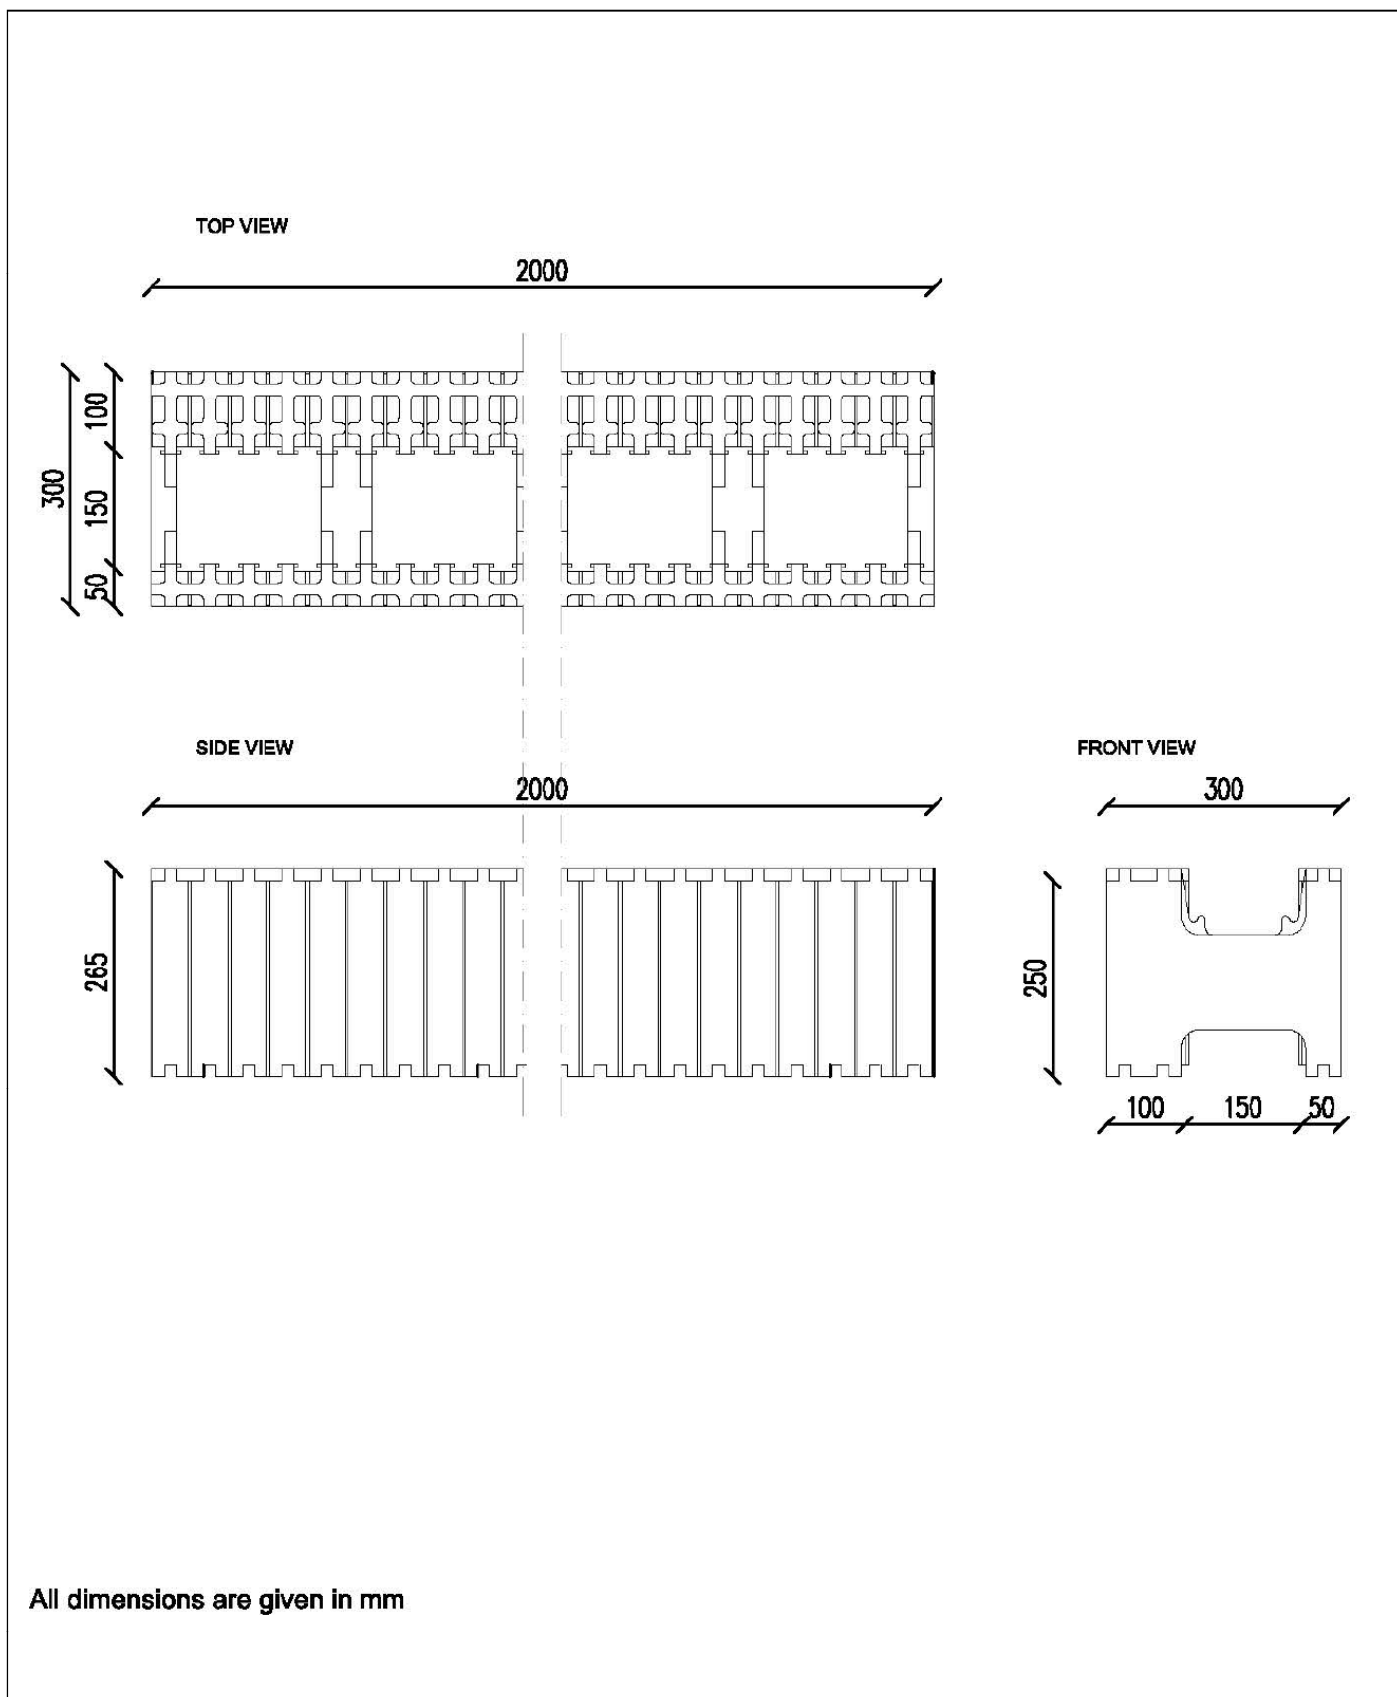


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "PRINCE BLOCK"  
Basic element MC 2/30  
200cm x 30cm x 25cm

Annex A18

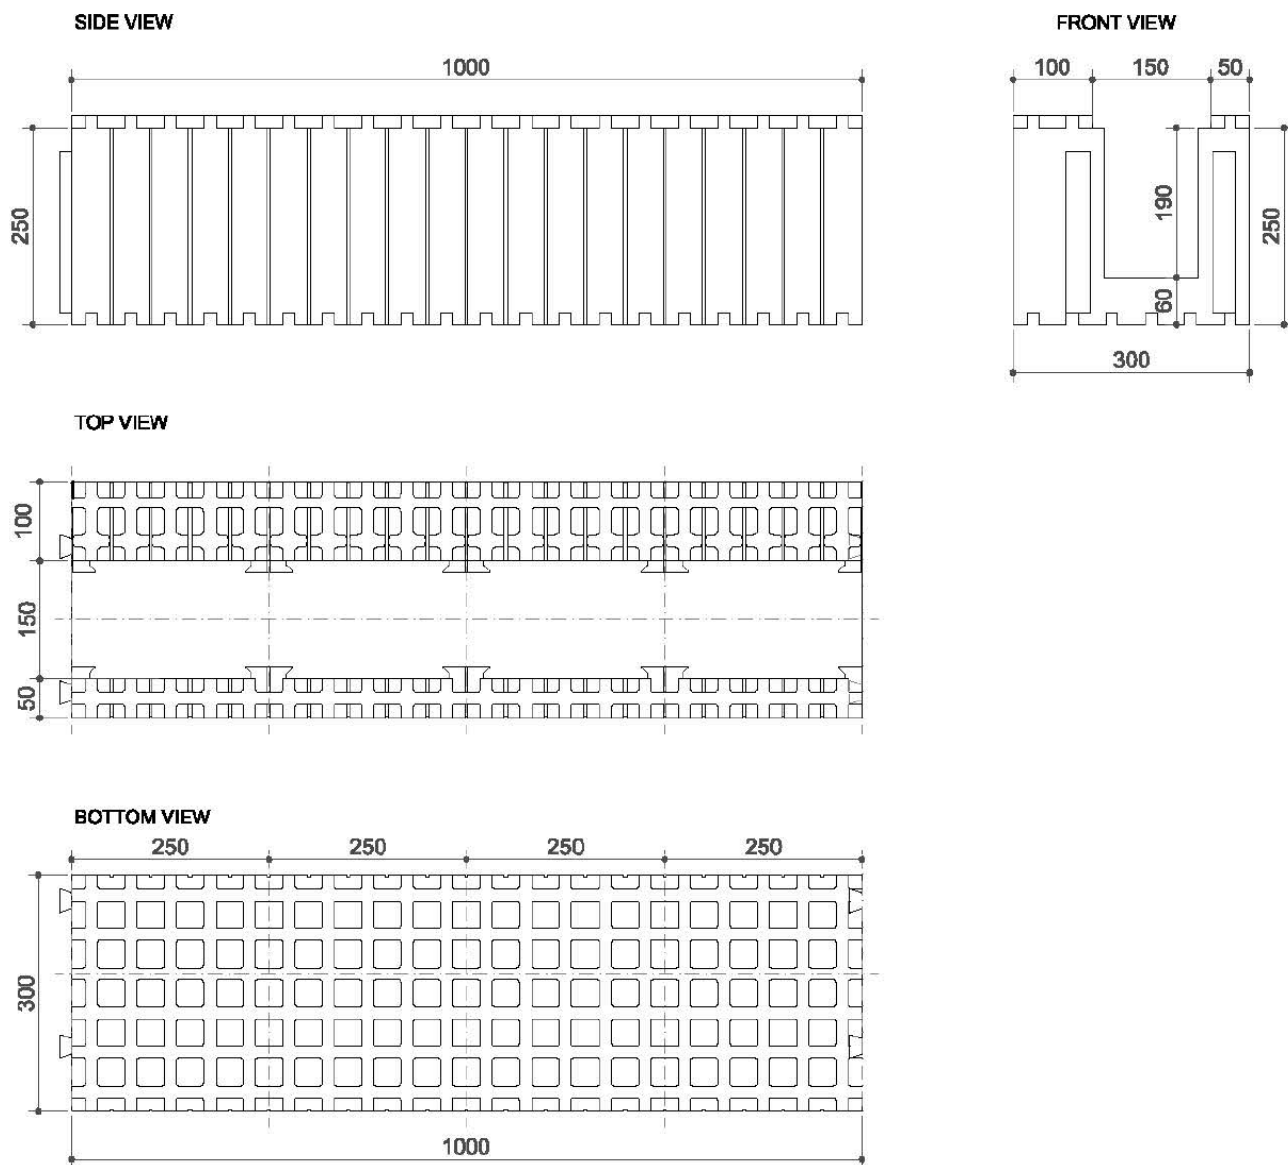


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "STANDARD"  
Header block ML 1/30  
10cm x 30cm x 25cm

Annex A19

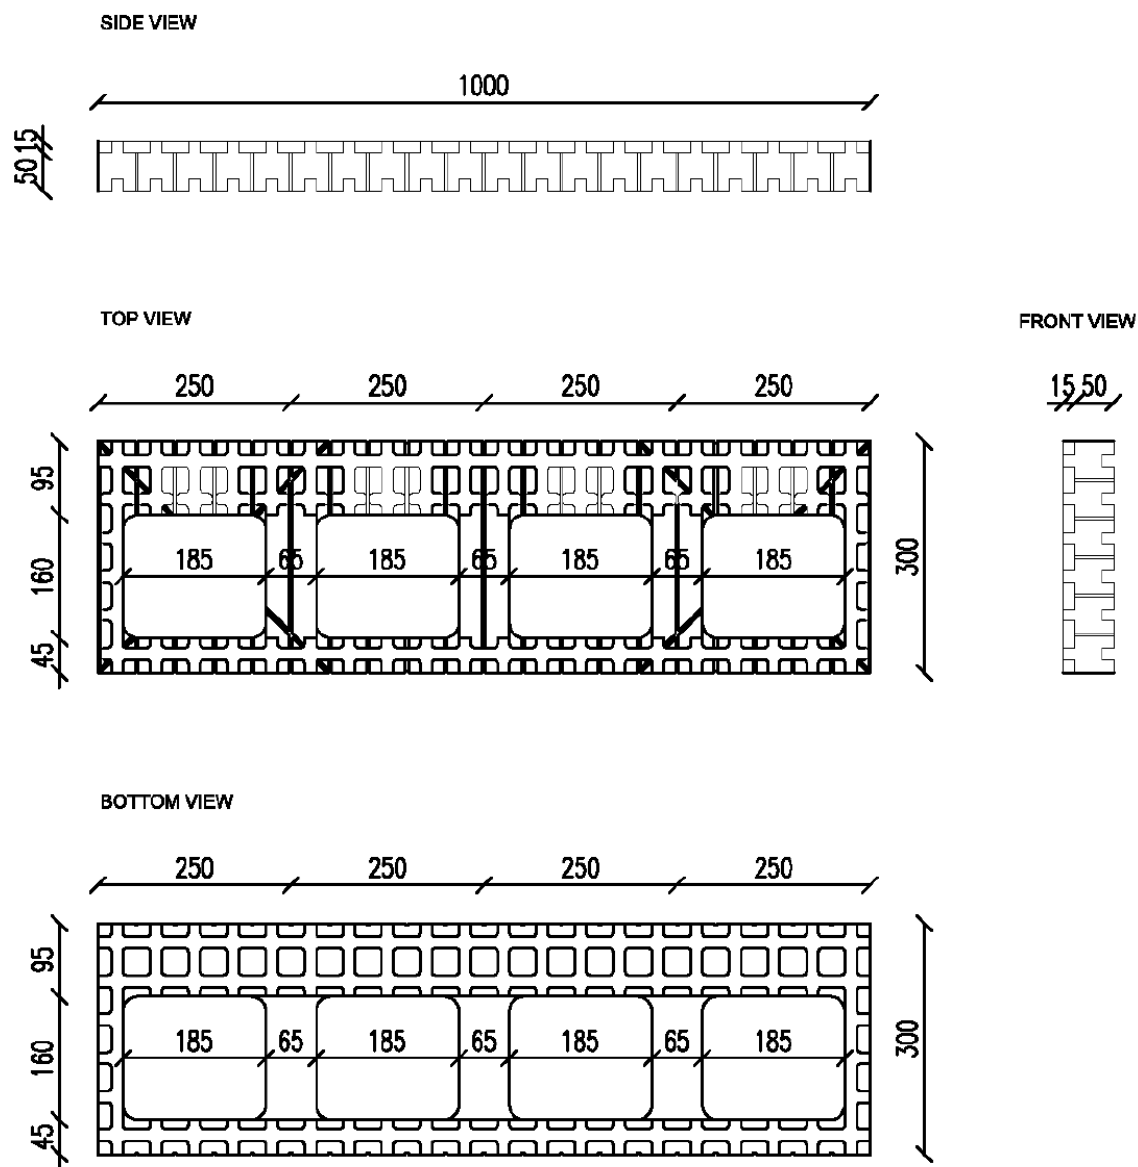


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "PRINCE BLOCK"  
Height adapter MH 1/30  
100cm x 5cm x 30cm

Annex A20

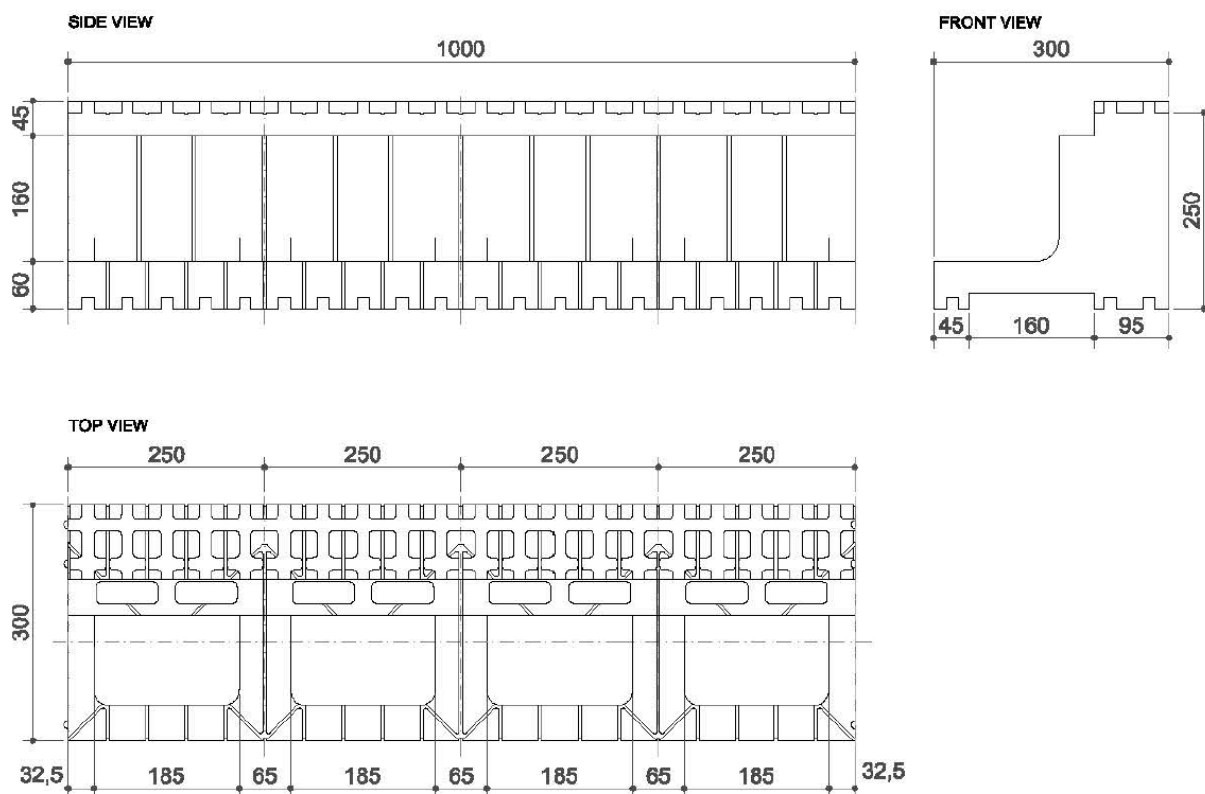


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "PRINCE BLOCK"  
Ceiling support element MP 1/30  
100cm x 30cm x 25cm

Annex A21

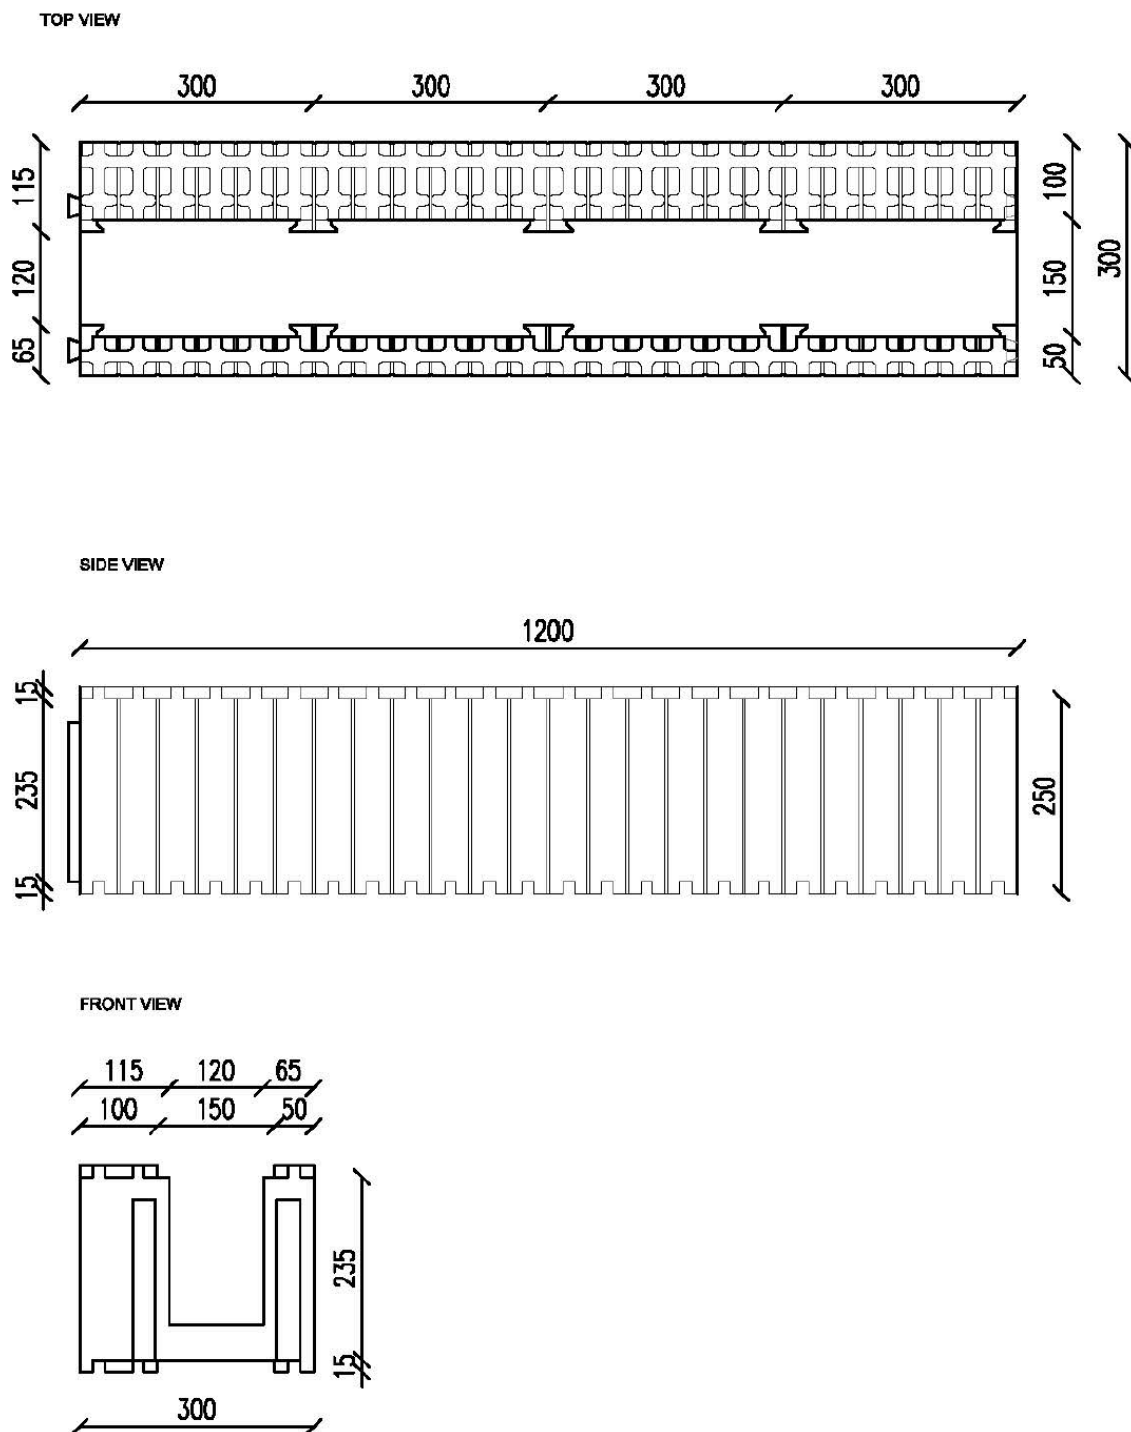


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


SYSTEM: "PRINCE BLOCK"  
Door header element MLA 1,2/30  
120cm x 30cm x 25cm

Annex A22


TOP VIEW

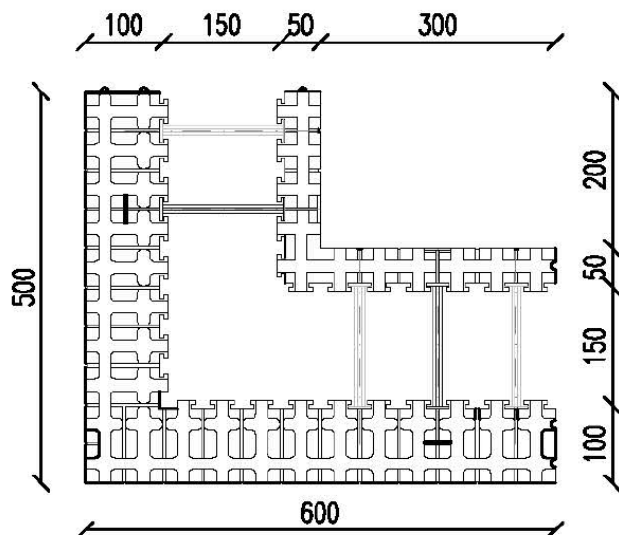

SIDE VIEW

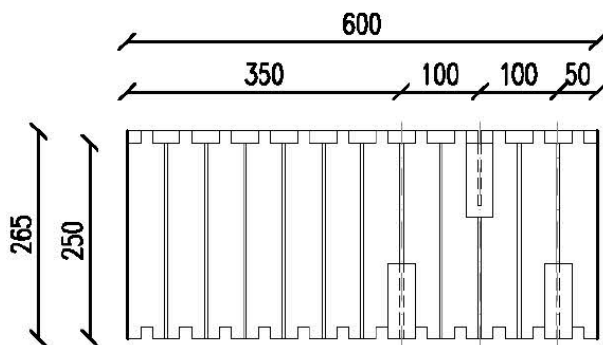

FRONT VIEW

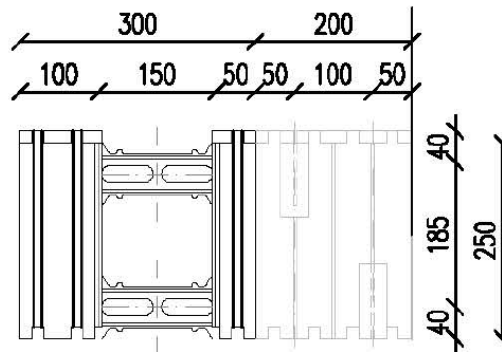


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


SYSTEM: "PRINCE BLOCK"  
90° corner (external / left) MCFU30 E90 LA  
110cm x 30cm x 25cm

Annex A23


TOP VIEW

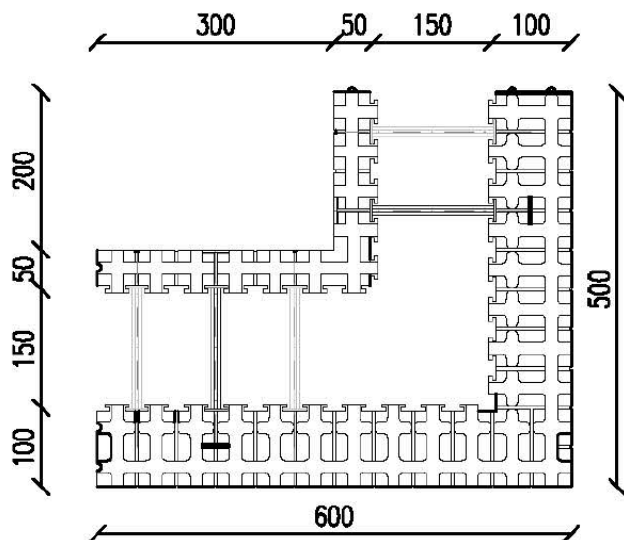

SIDE VIEW

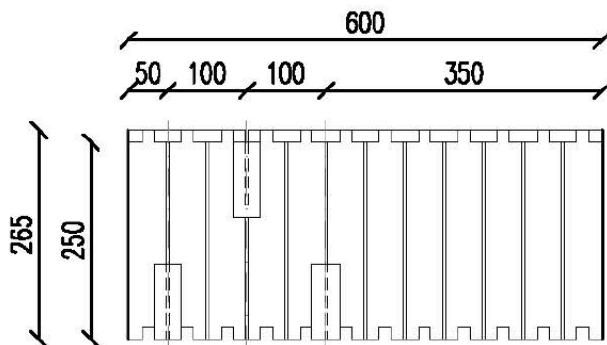

FRONT VIEW

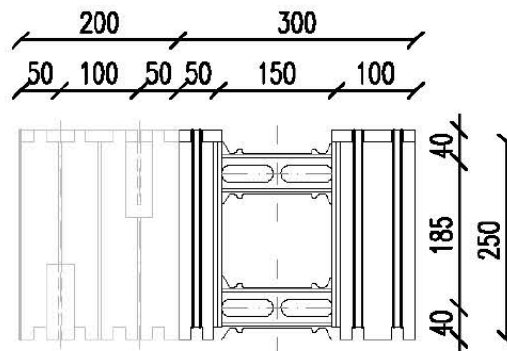


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "PRINCE BLOCK"  
90° corner (external / right) MCFU30 E90 RA  
110cm x 30cm x 25cm

Annex A24

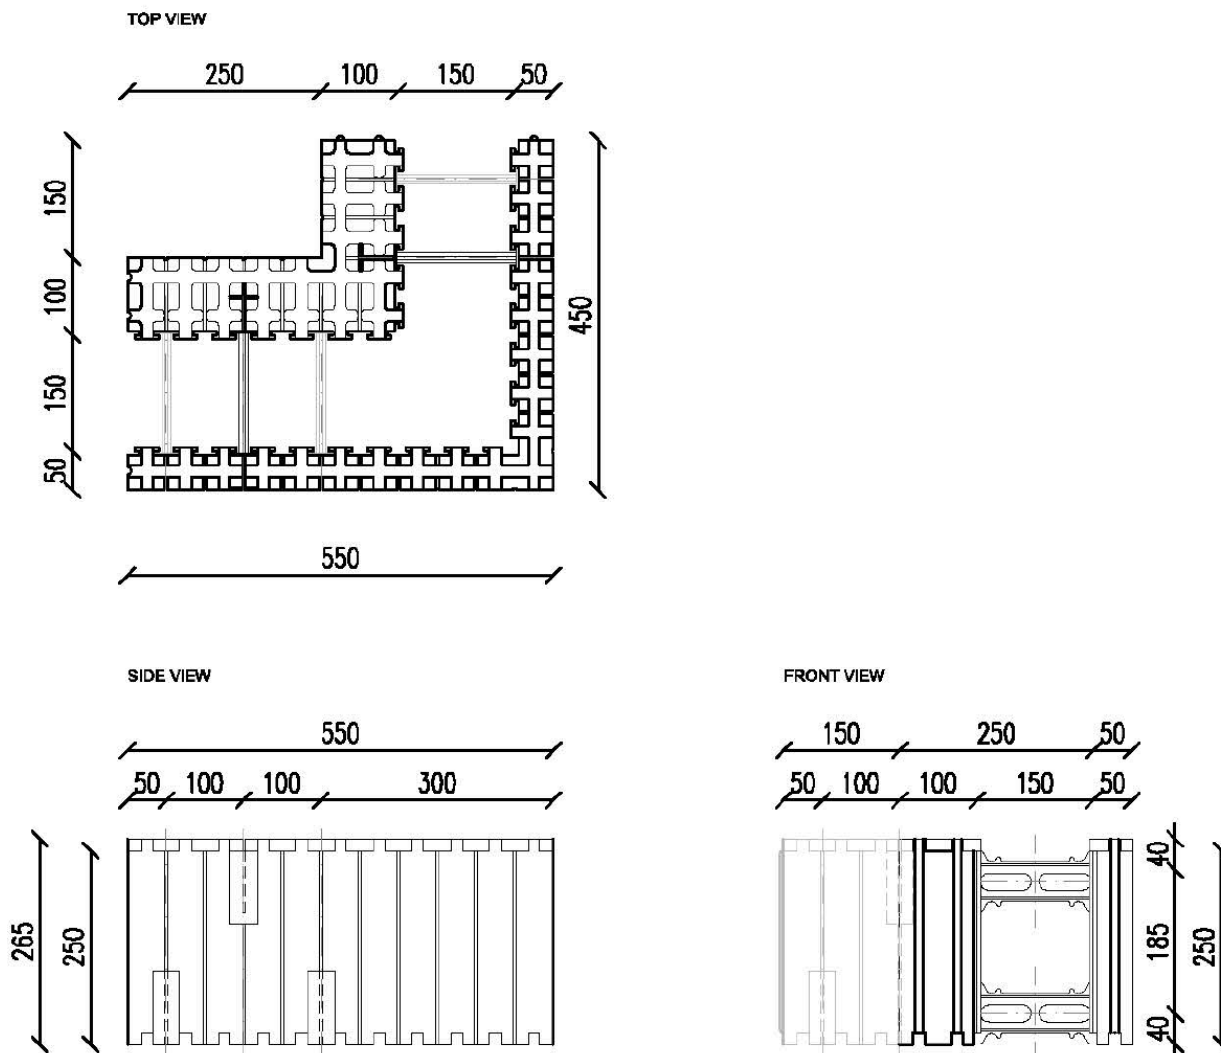


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "PRINCE BLOCK"  
90° comer (internal / right) MCFU30 E90 RI  
40cm x 30cm x 25cm

Annex A25

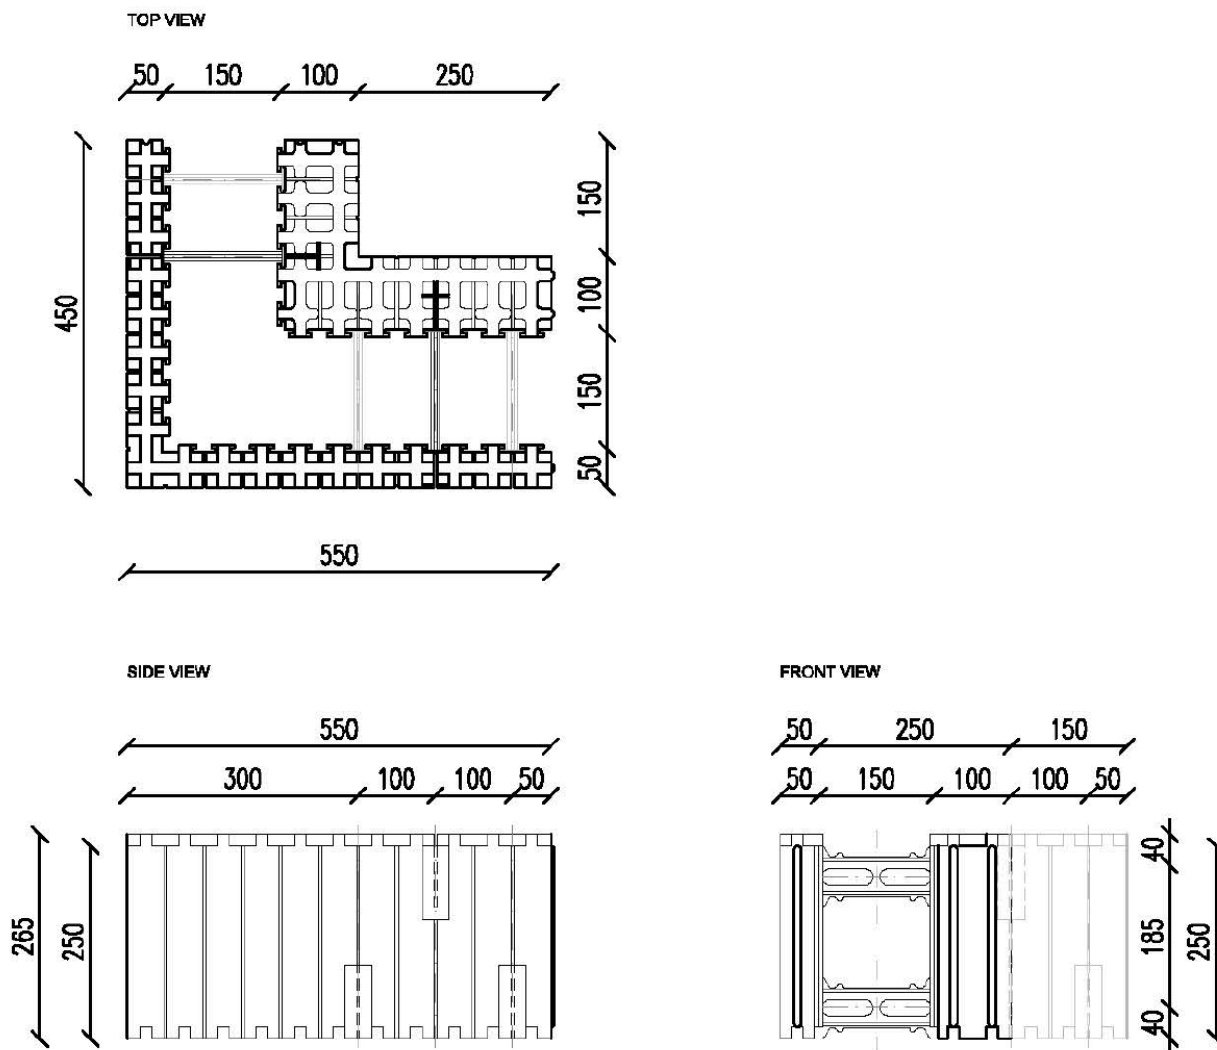


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "PRINCE BLOCK"  
90° corner (internal / left) MCFU30 E90 LI  
40cm x 30cm x 25cm

Annex A26

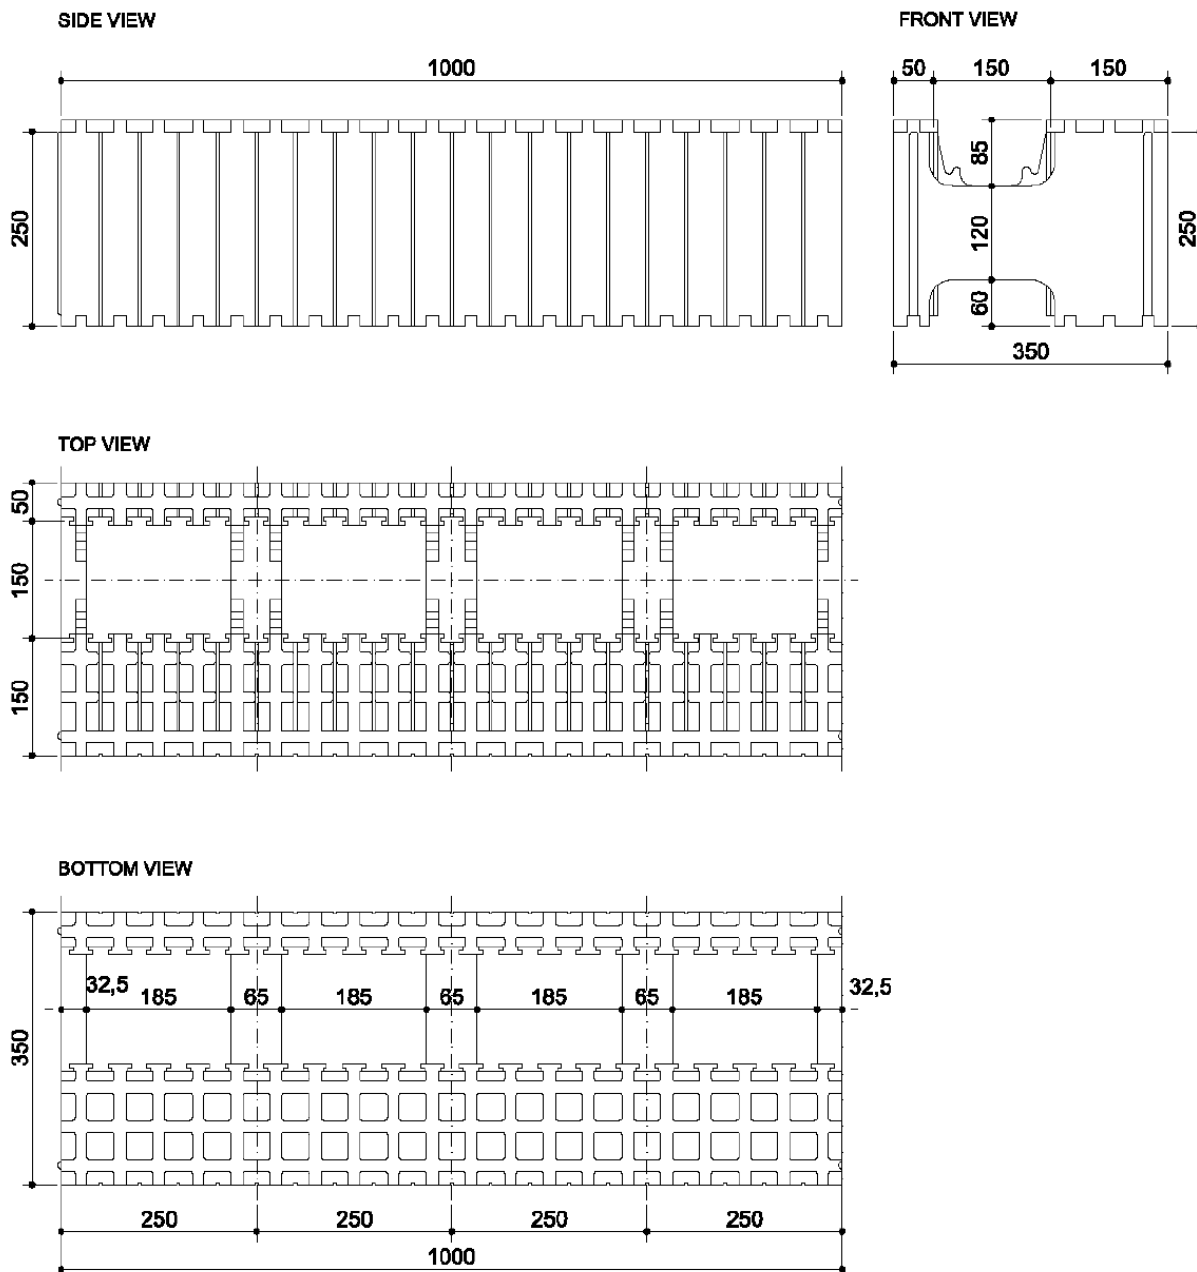


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Primary block MC 1/35  
100cm x 35cm x 25cm

Annex A27

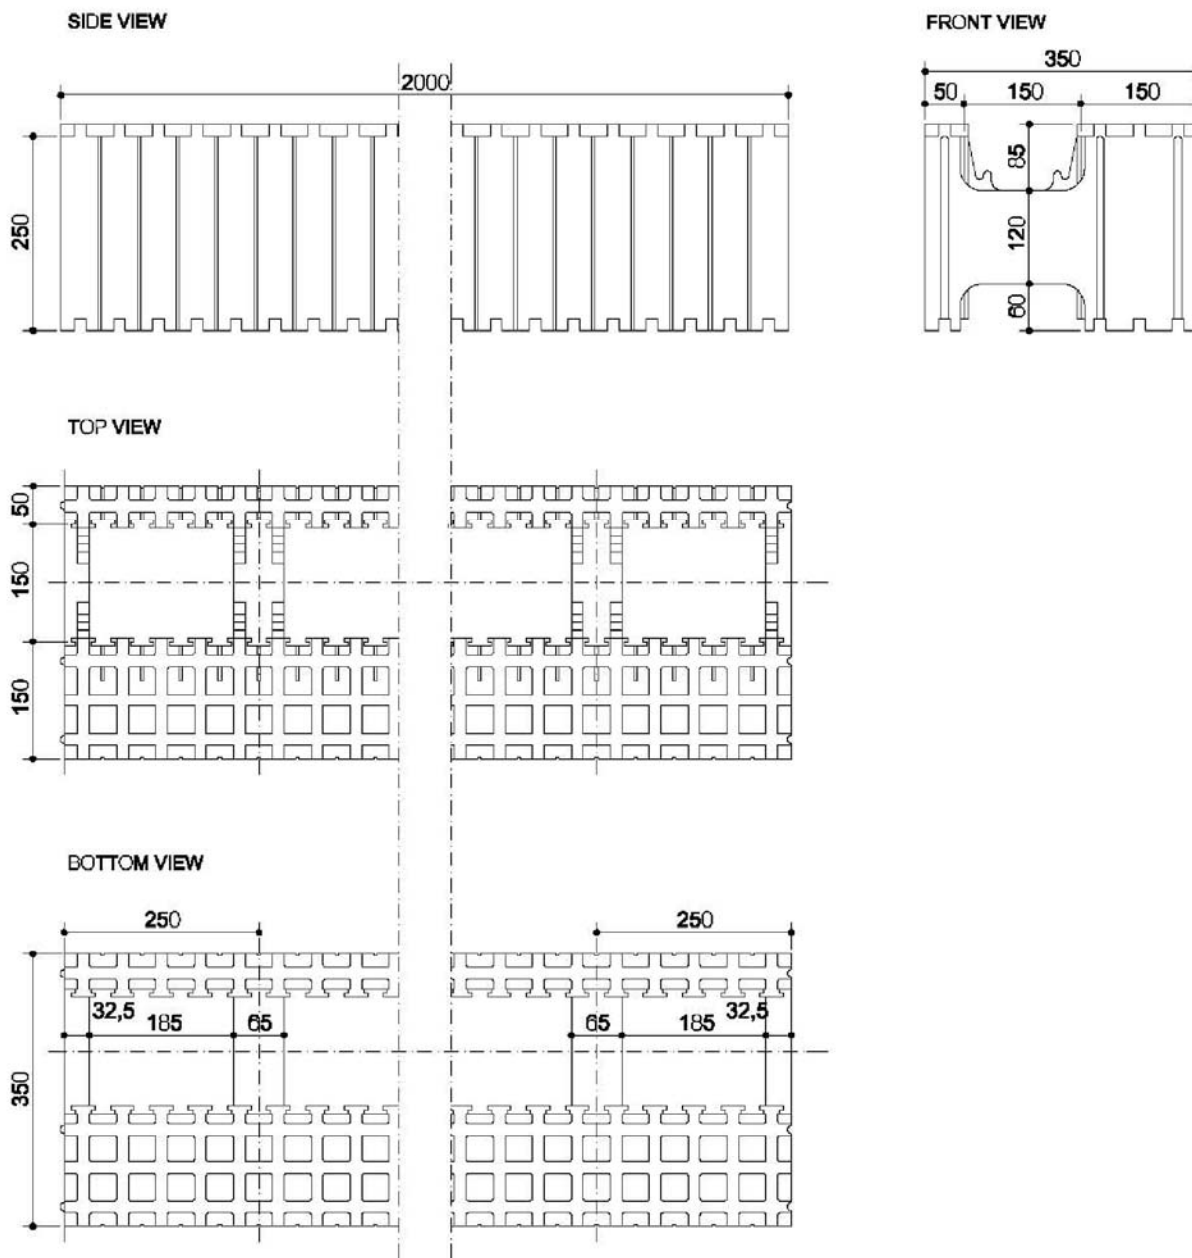


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Primary block MC 2/35  
200cm x 35cm x 25cm

Annex A28

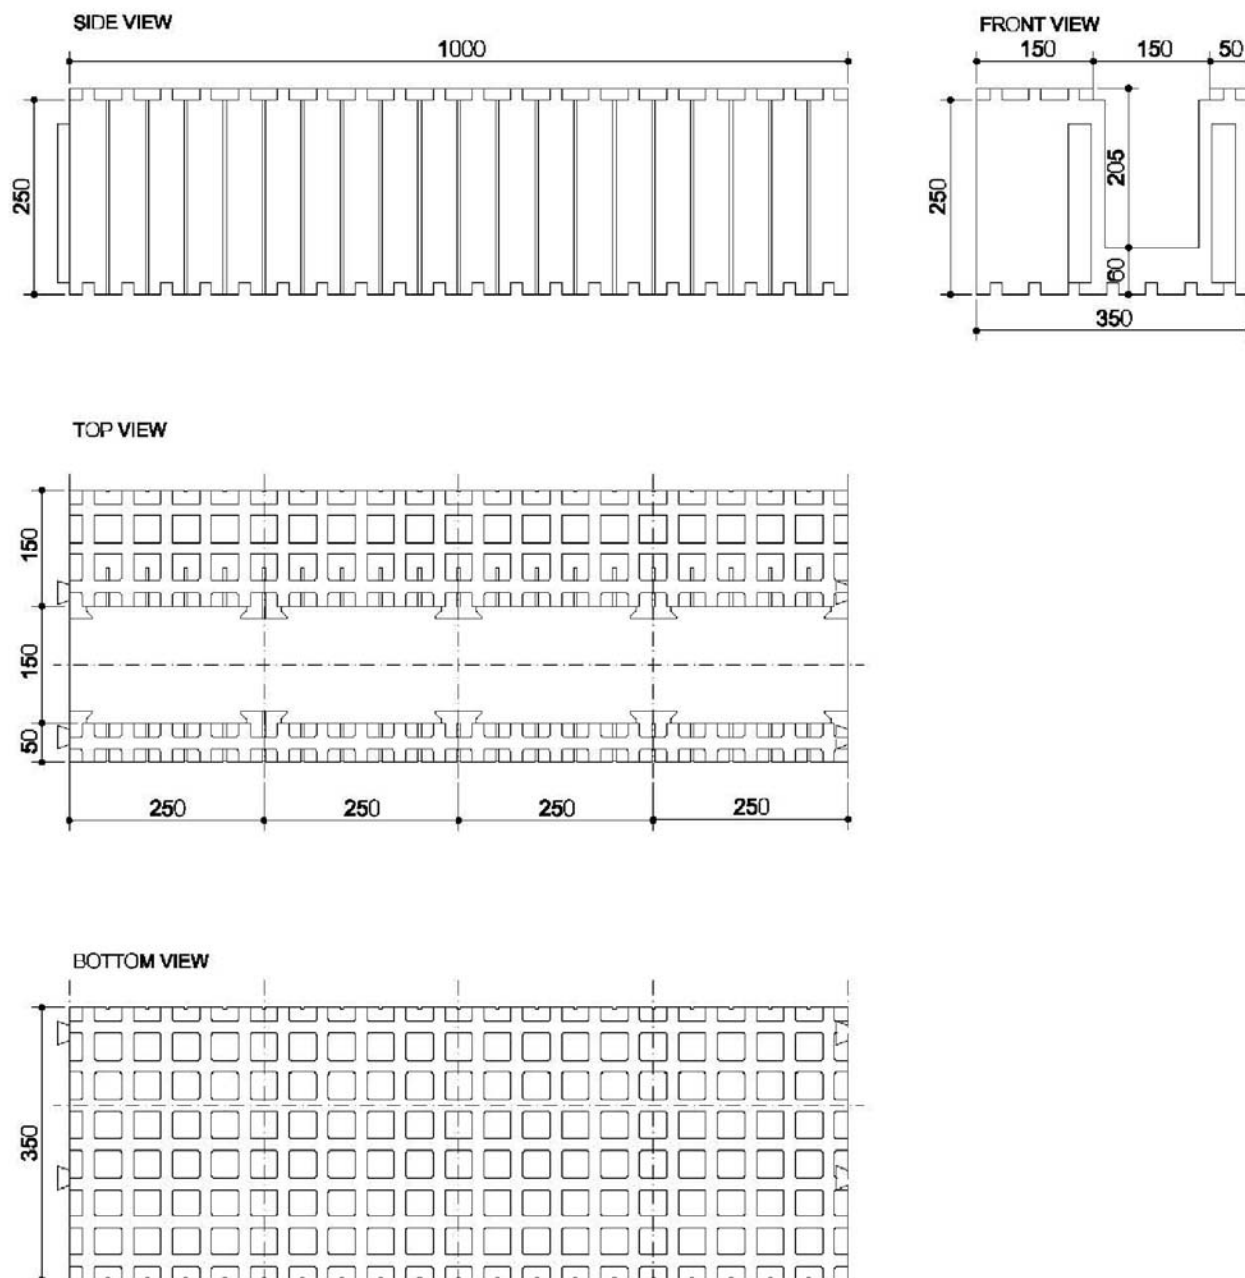


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Header block ML 1/35  
100cm x 35cm x 25cm

Annex A29

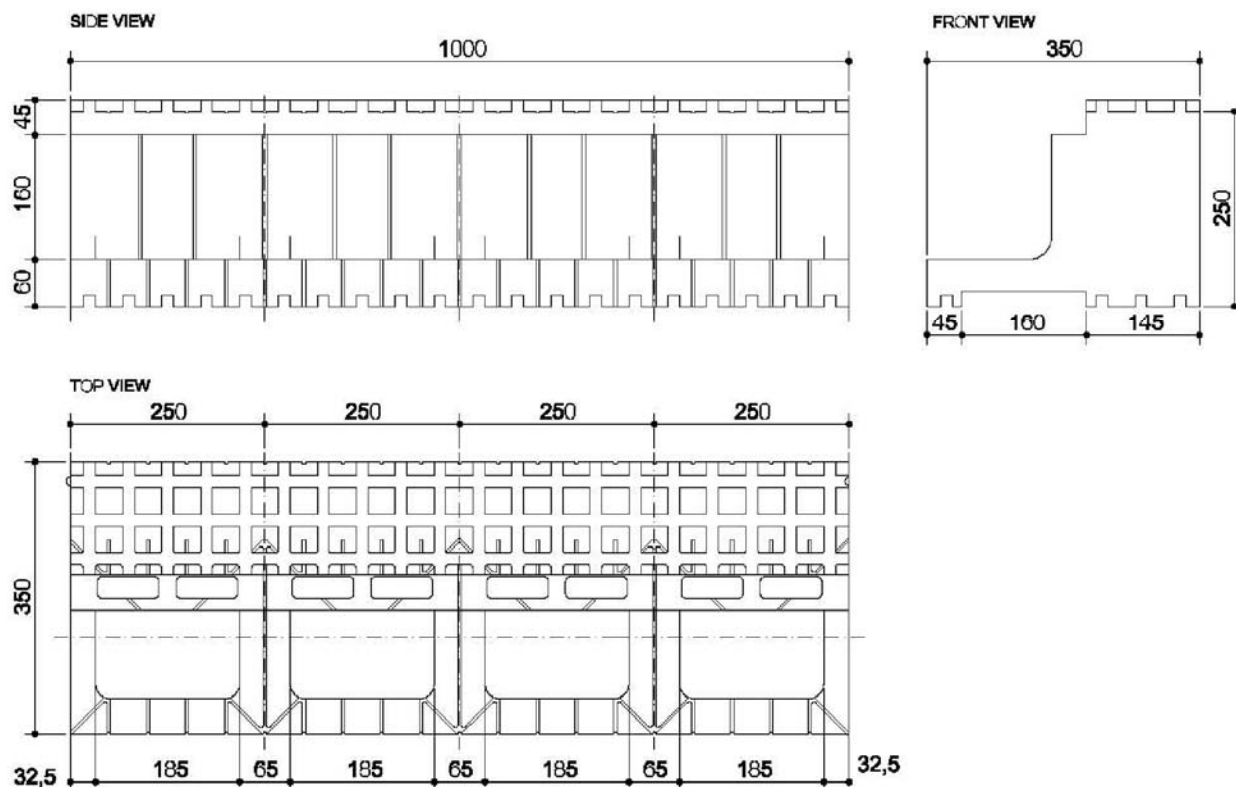


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
 Floor support element MP 1/35  
 100cm x 35cm x 25cm

Annex A30

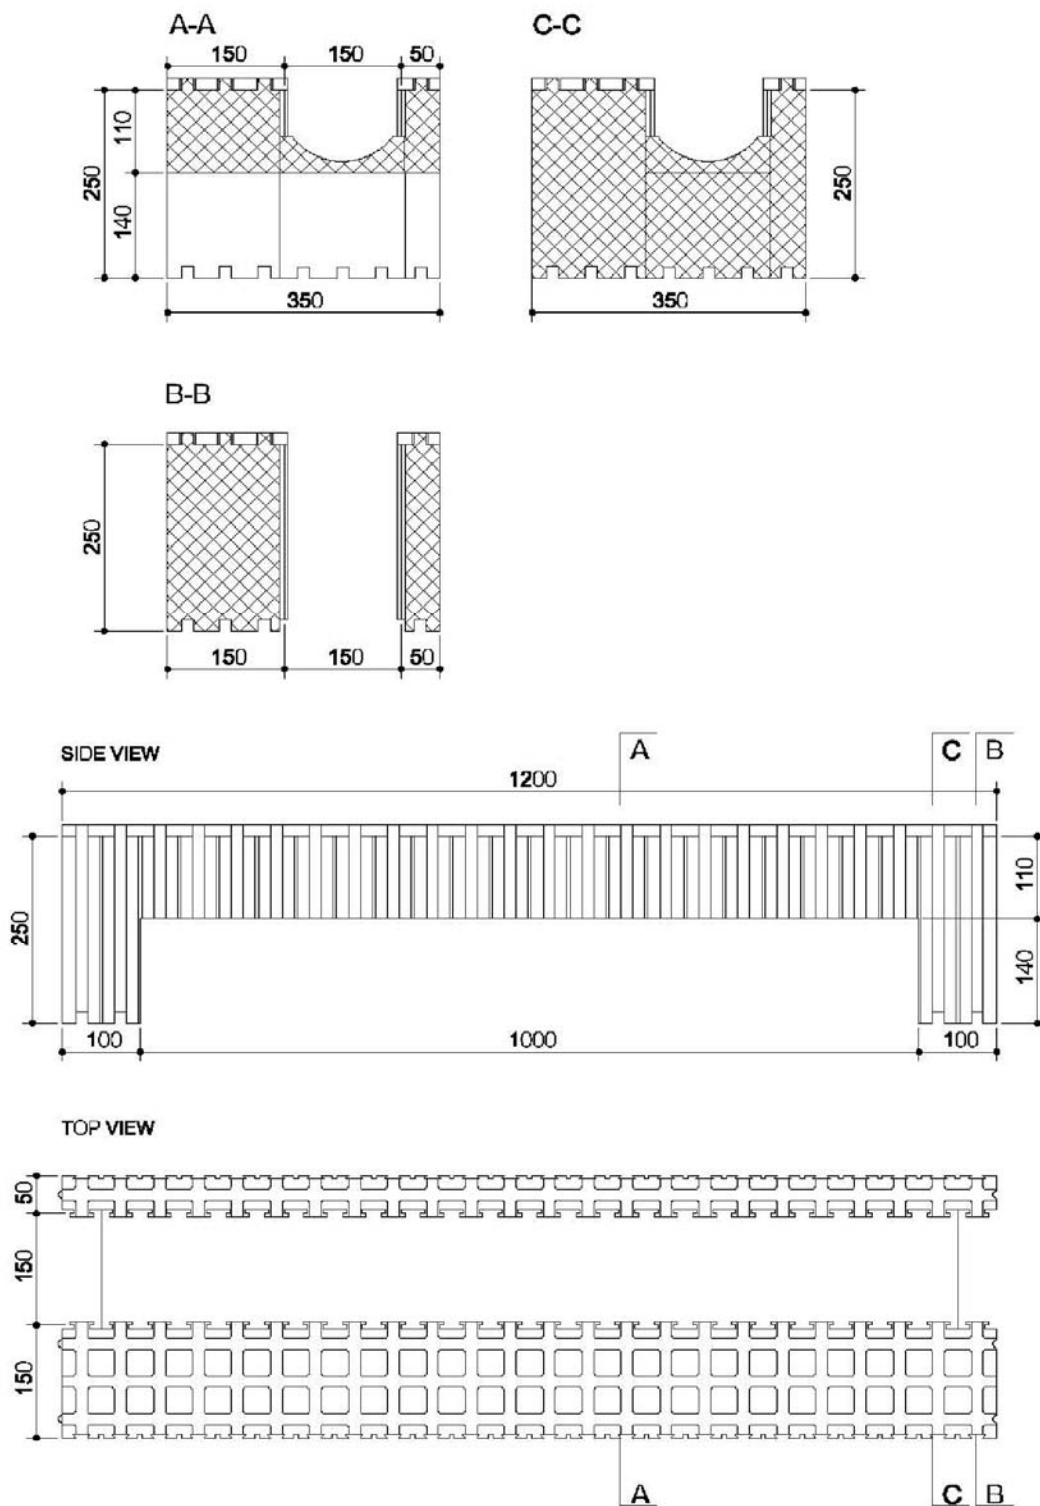


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Doorhead element MLA 1,2/35  
120cm x 35cm x 25cm

Annex A31

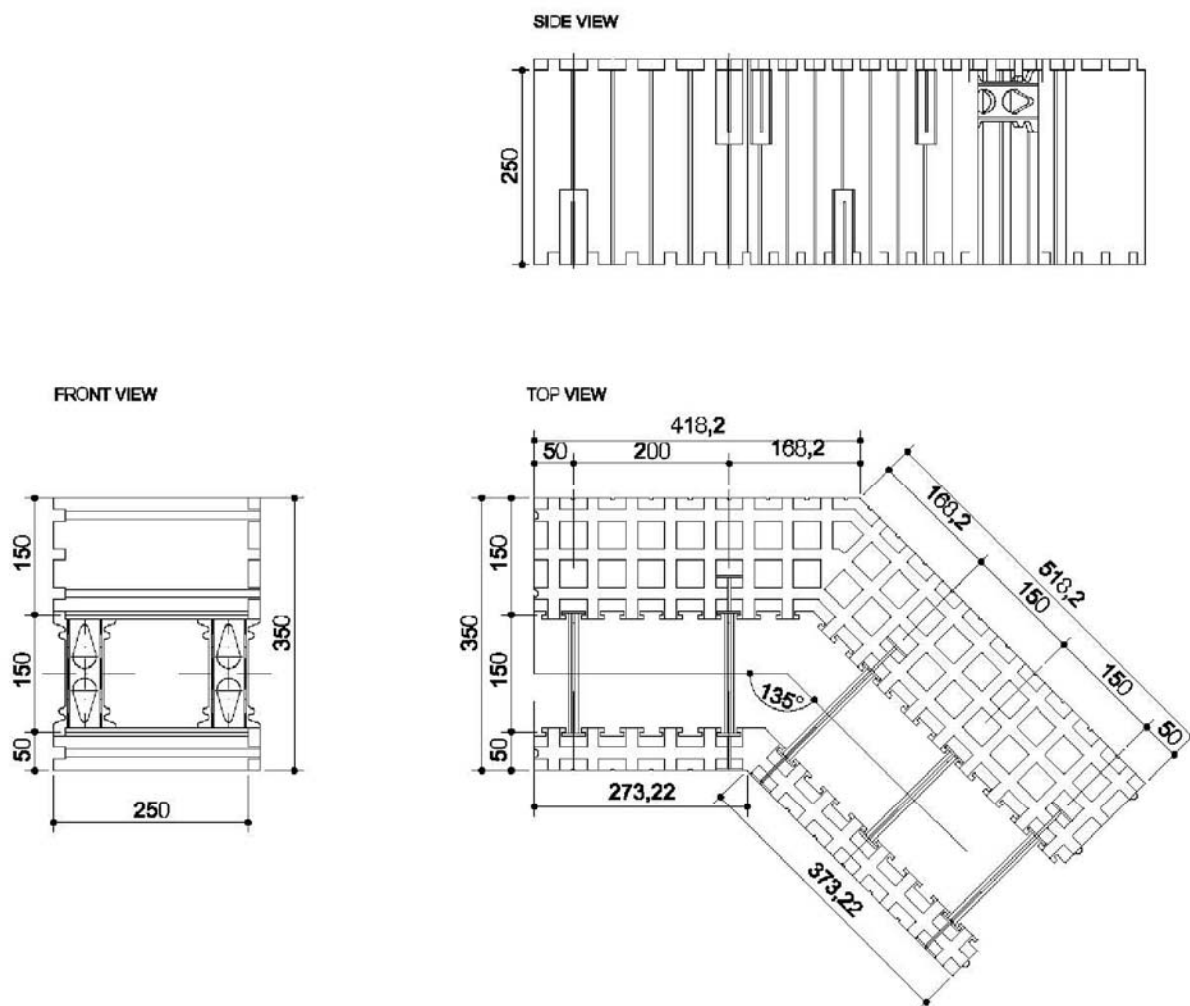


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Outer angle joint element - right MCFU35 E45 RA  
(41,8cm + 51,8cm) x 35cm x 25cm

Annex A32

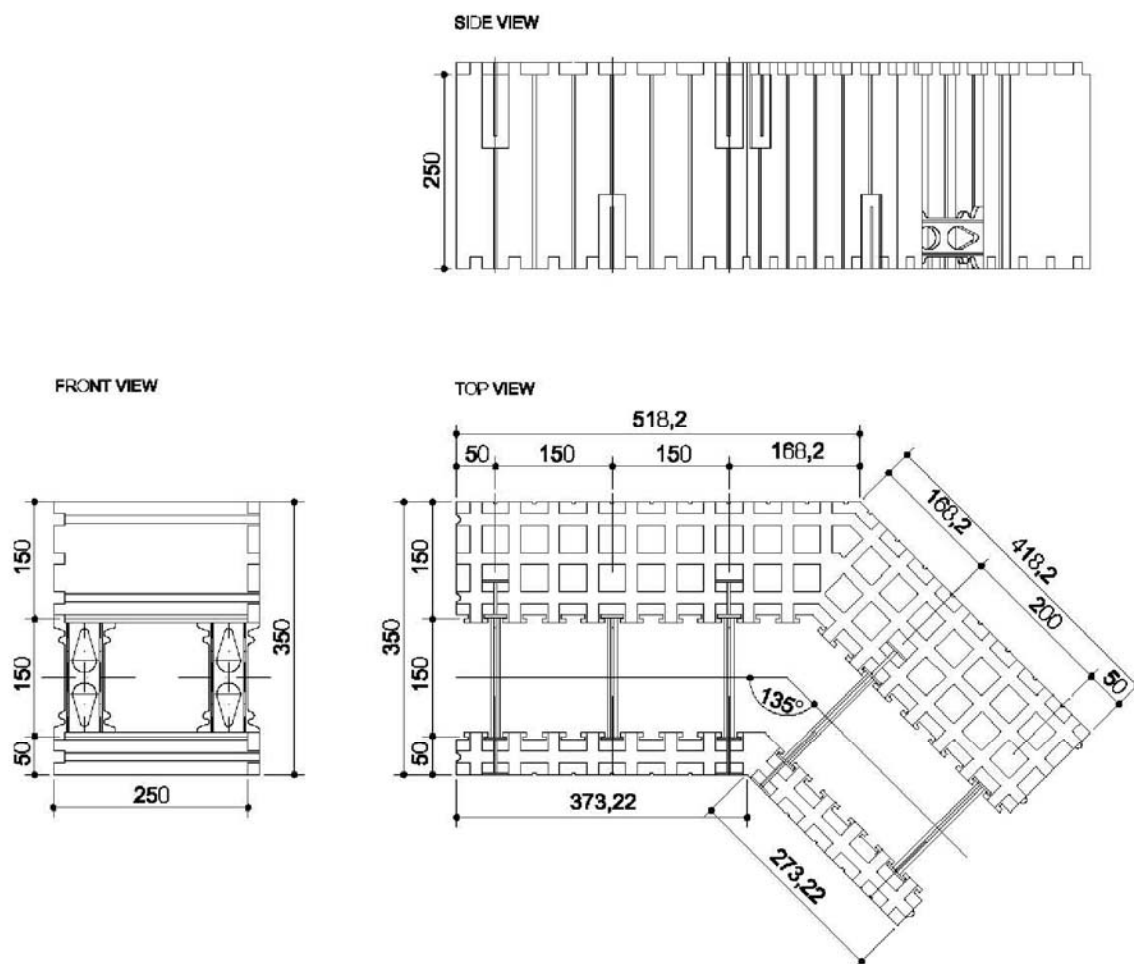


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Outer angle joint element - left MCFU35 E45 LA  
(51,8cm + 41,8cm) x 35cm x 25cm

Annex A33

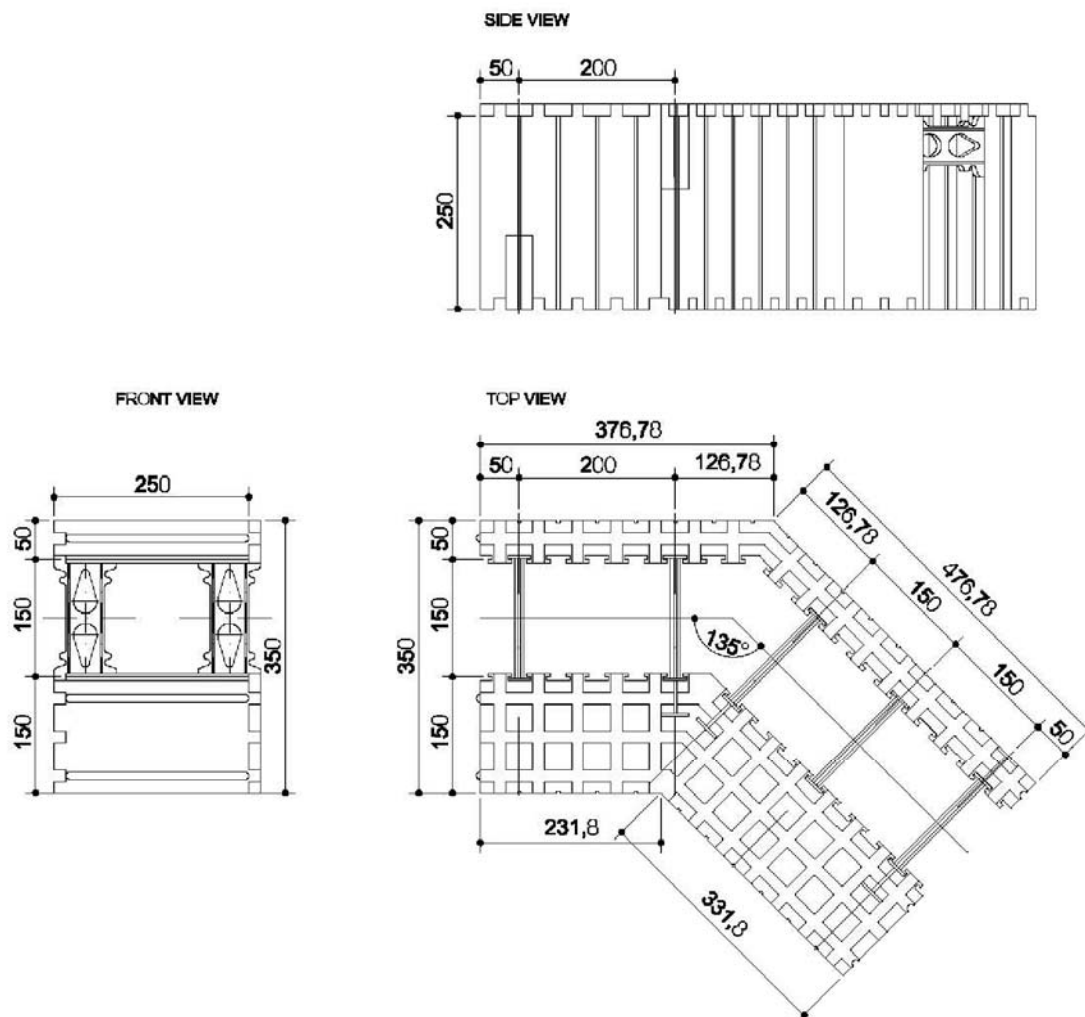


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Inner angle joint element - left MCF35EI/L  
(23,2cm + 33,2cm) x 35cm x 25cm

Annex A34

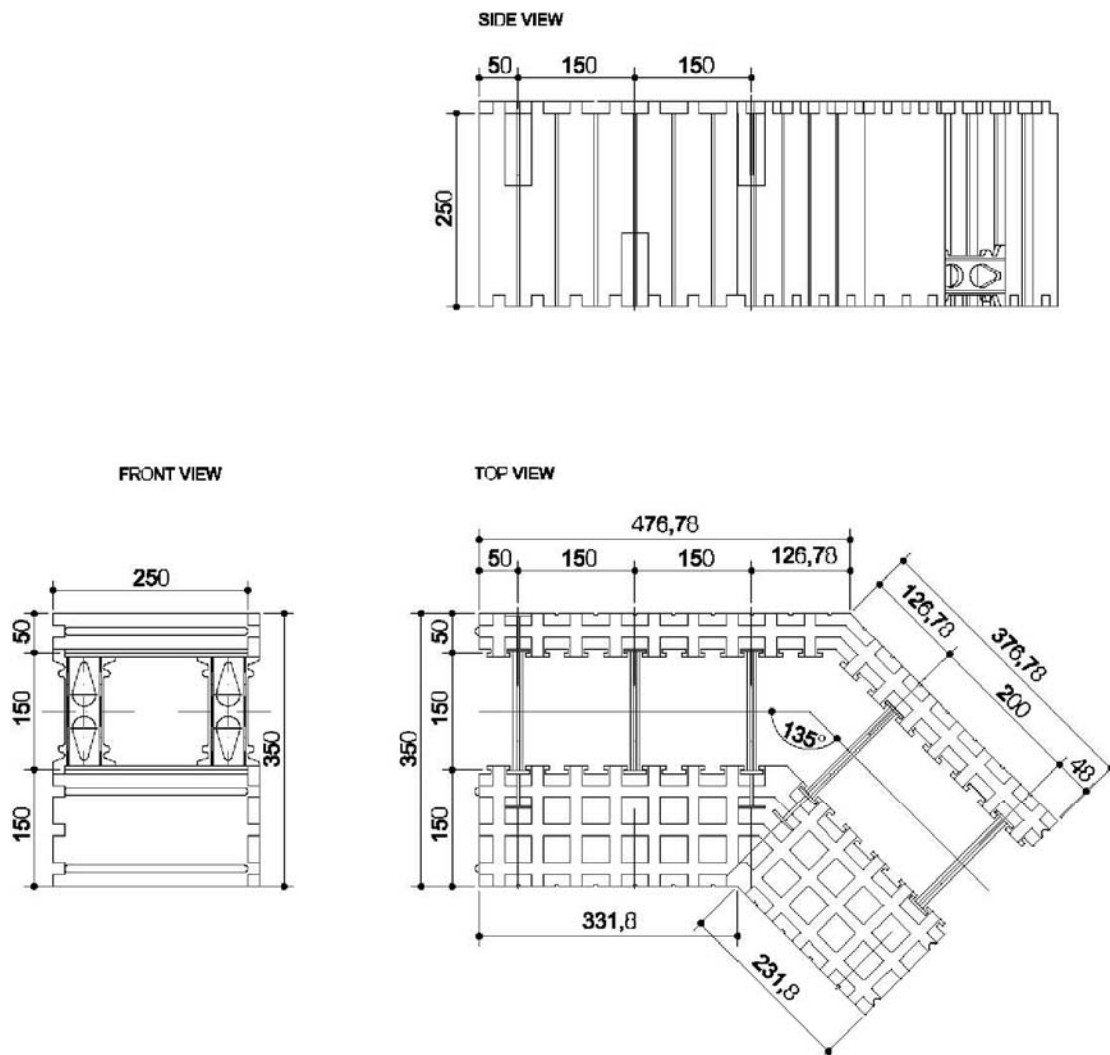


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
Inner angle joint element - right MCFU 35 E45 RI  
(33,2cm + 23,2cm) x 35cm x 25cm

Annex A35

English translation prepared by DIBt



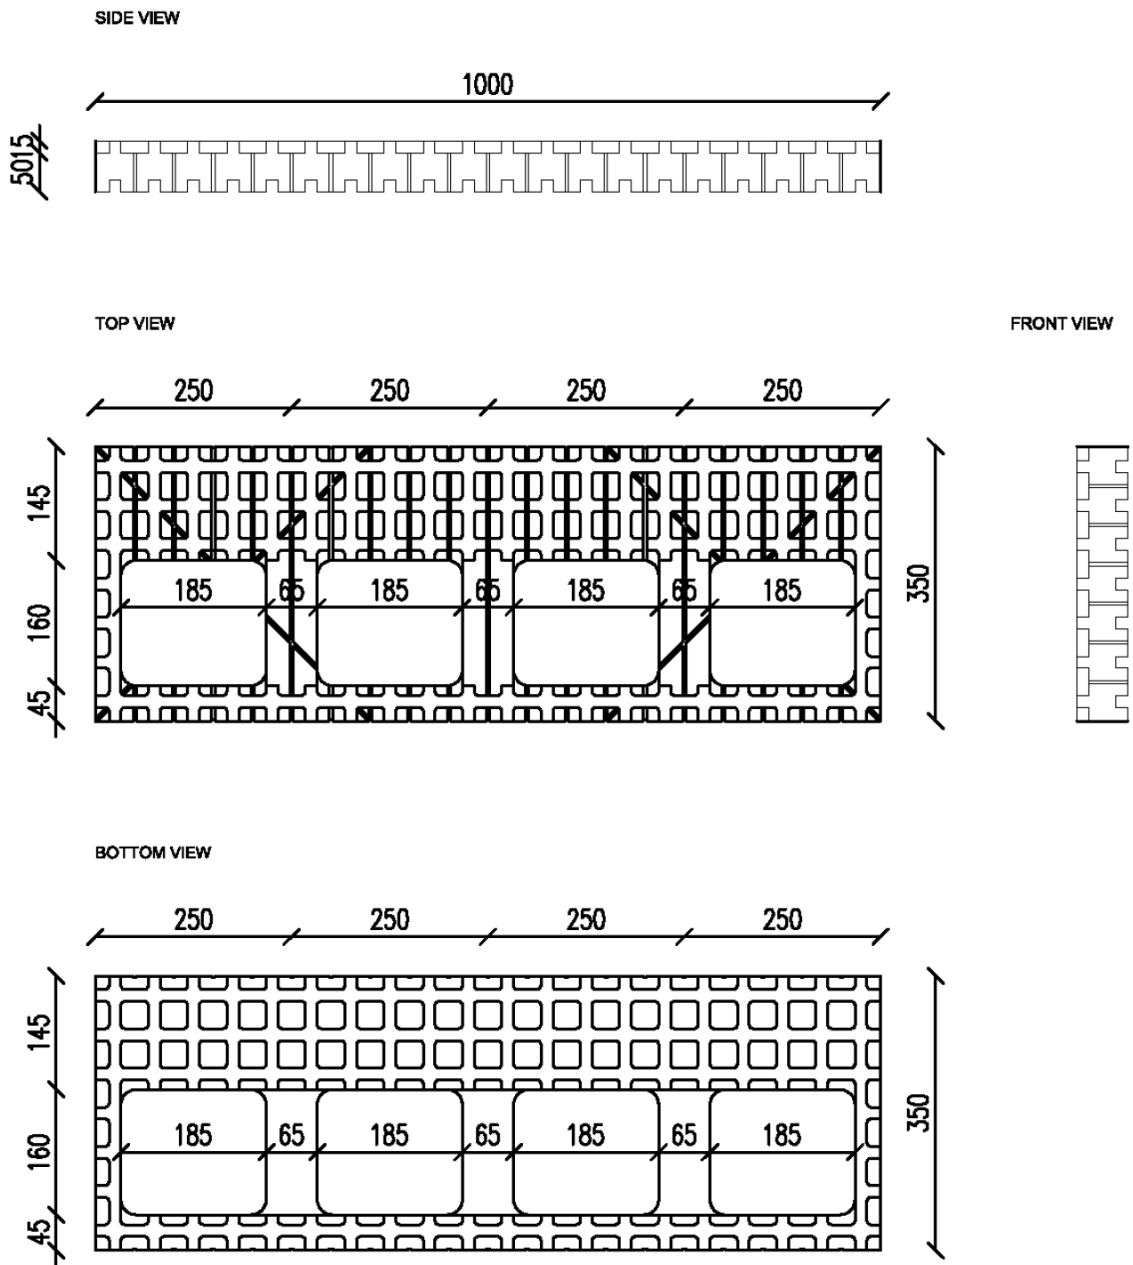


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
 Heigh adapter MH 1/35  
 100cm x 5cm x 35cm

Annex A36

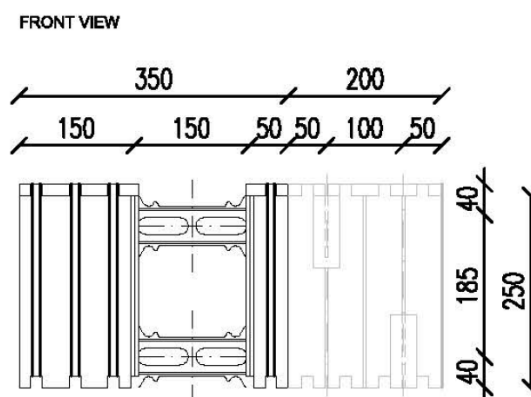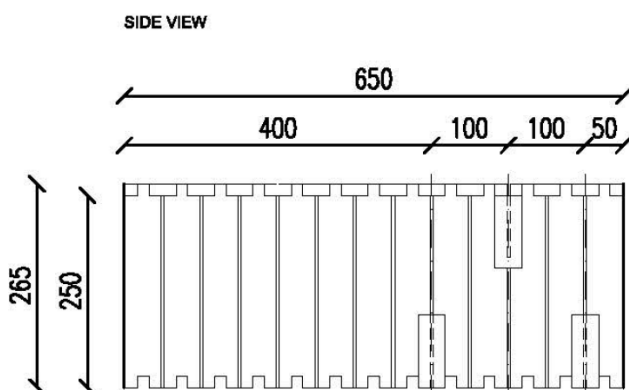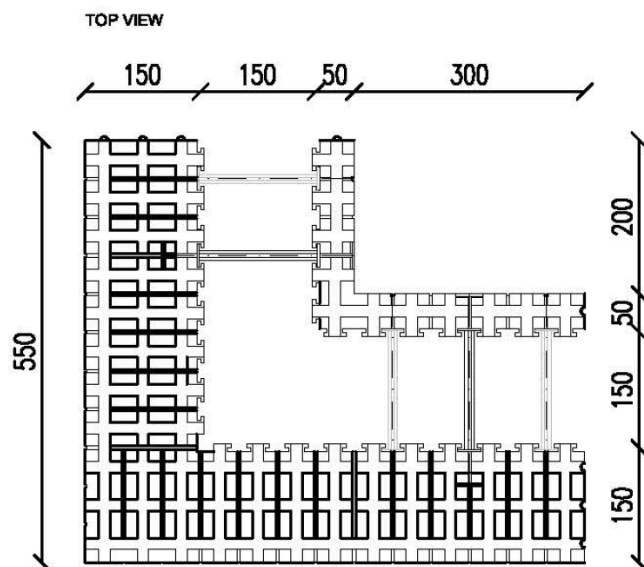


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


SYSTEM: "KING BLOCK"  
90° corner (external / left) MCFU35 E90 LA  
120cm x 35cm x 25cm

Annex A37


TOP VIEW

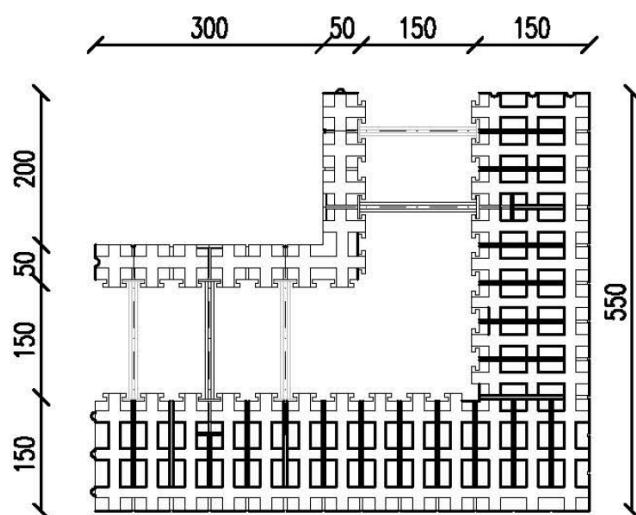

SIDE VIEW

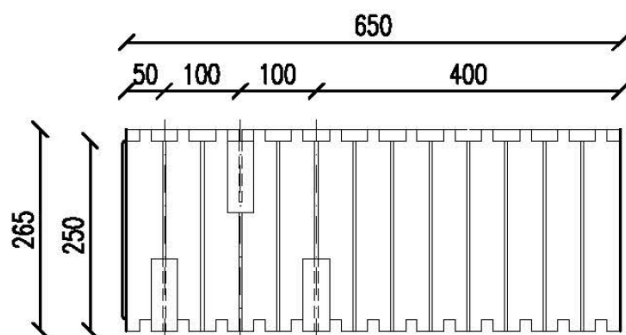

FRONT VIEW

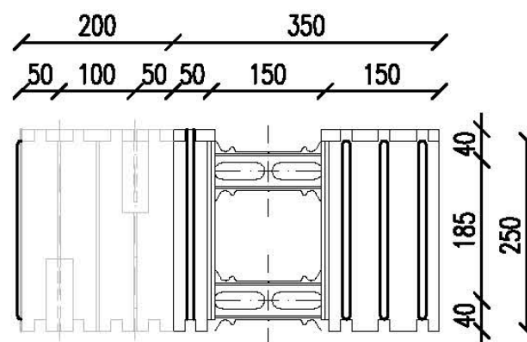


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
90° corner (external / right) MCFU35 E90 RA  
120cm x 35cm x 25cm

Annex A38

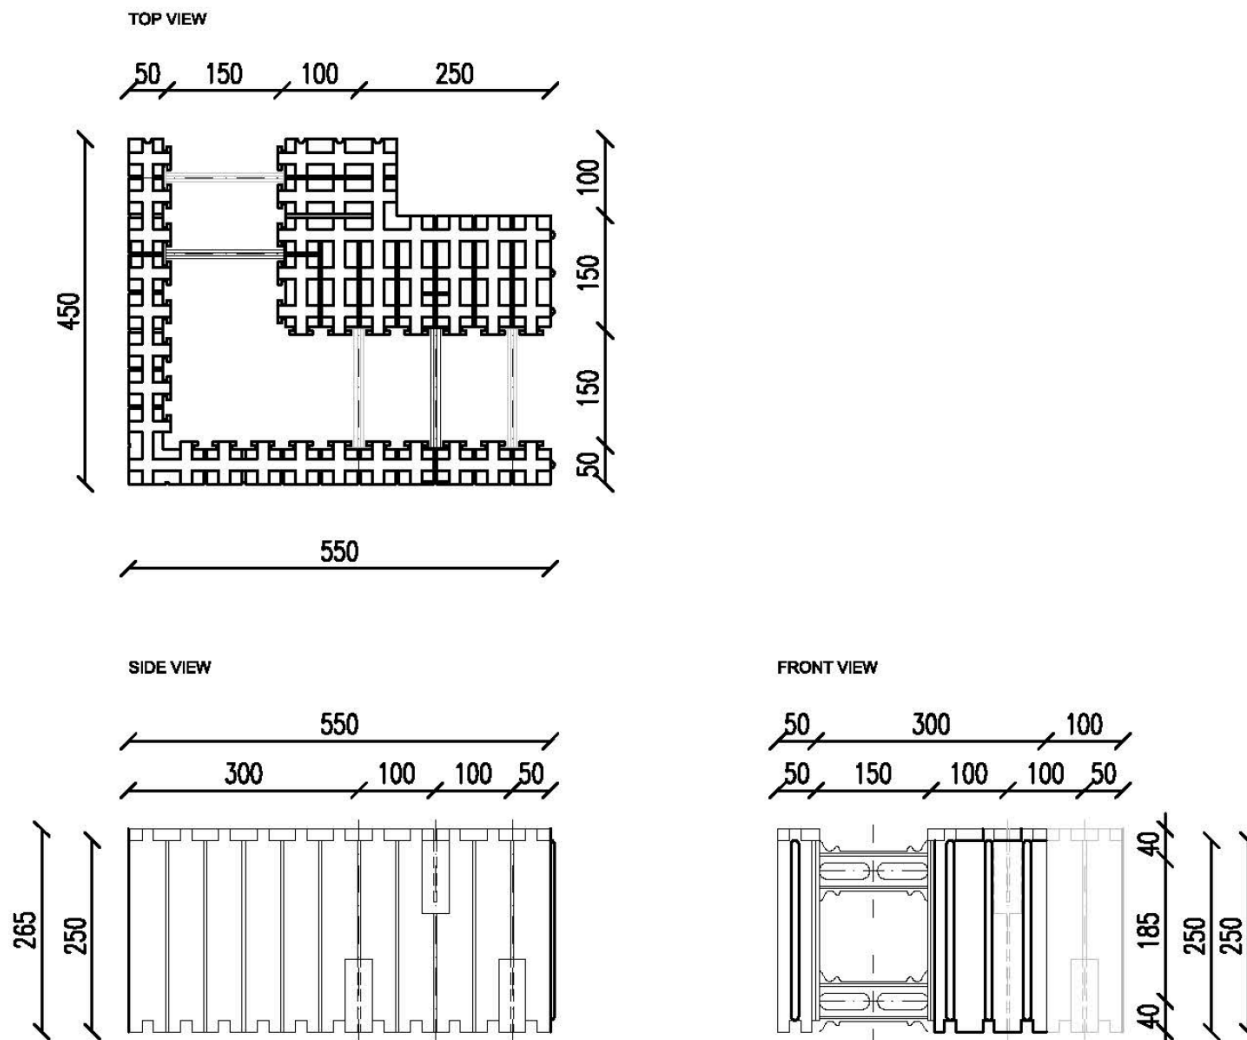


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
90° comer (internal / left) MCFU35 E90 LI  
30cm x 35cm x 25cm

Annex A39

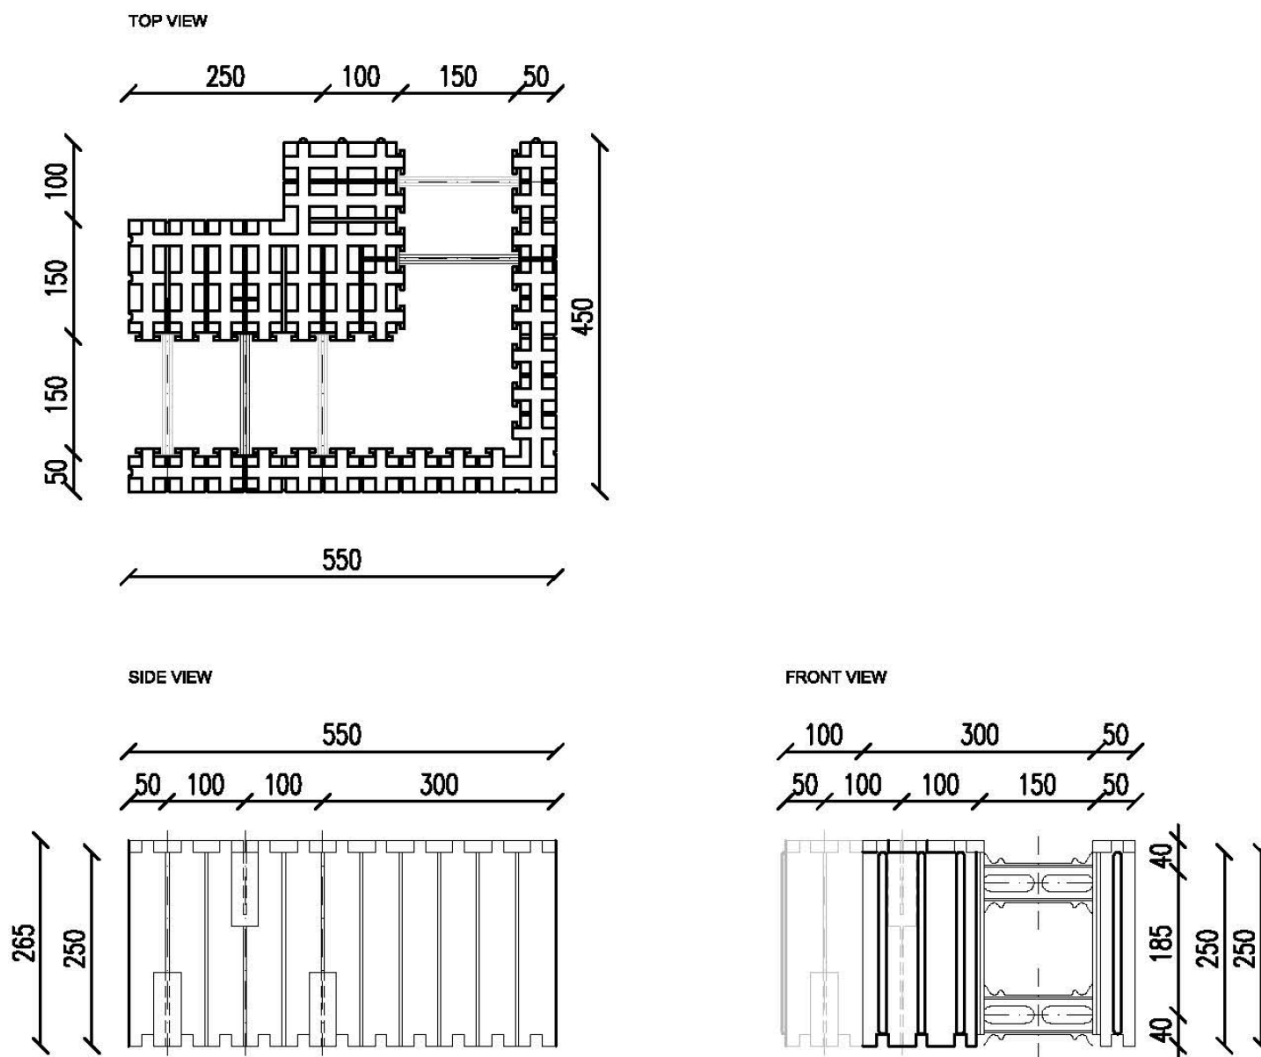


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "KING BLOCK"  
90° comer (internal / right) MCFU35 E90 RI  
30cm x 35cm x 25cm


Annex A40

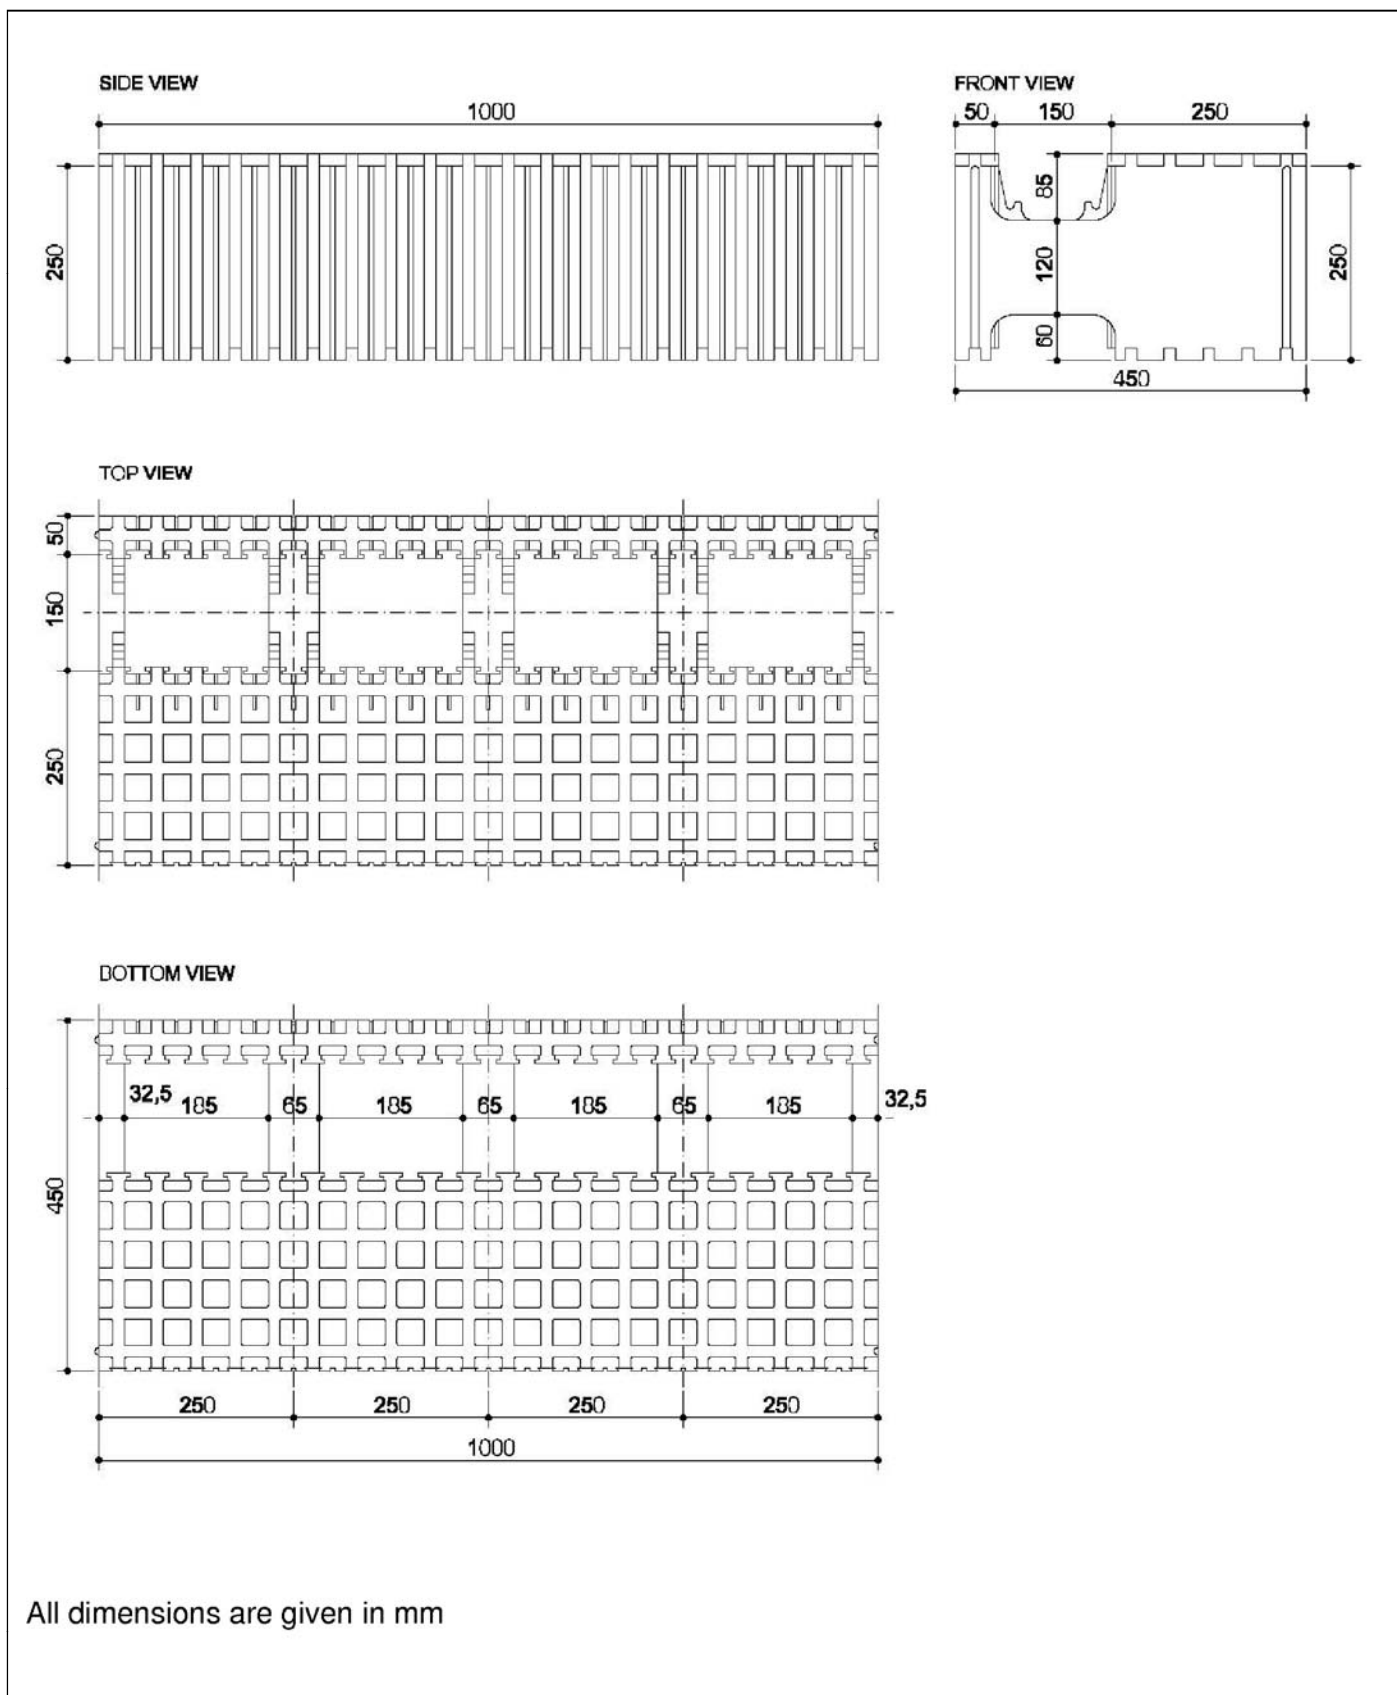

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
Primary block MC 1/45  
100cm x 45cm x 25cm

Annex A41

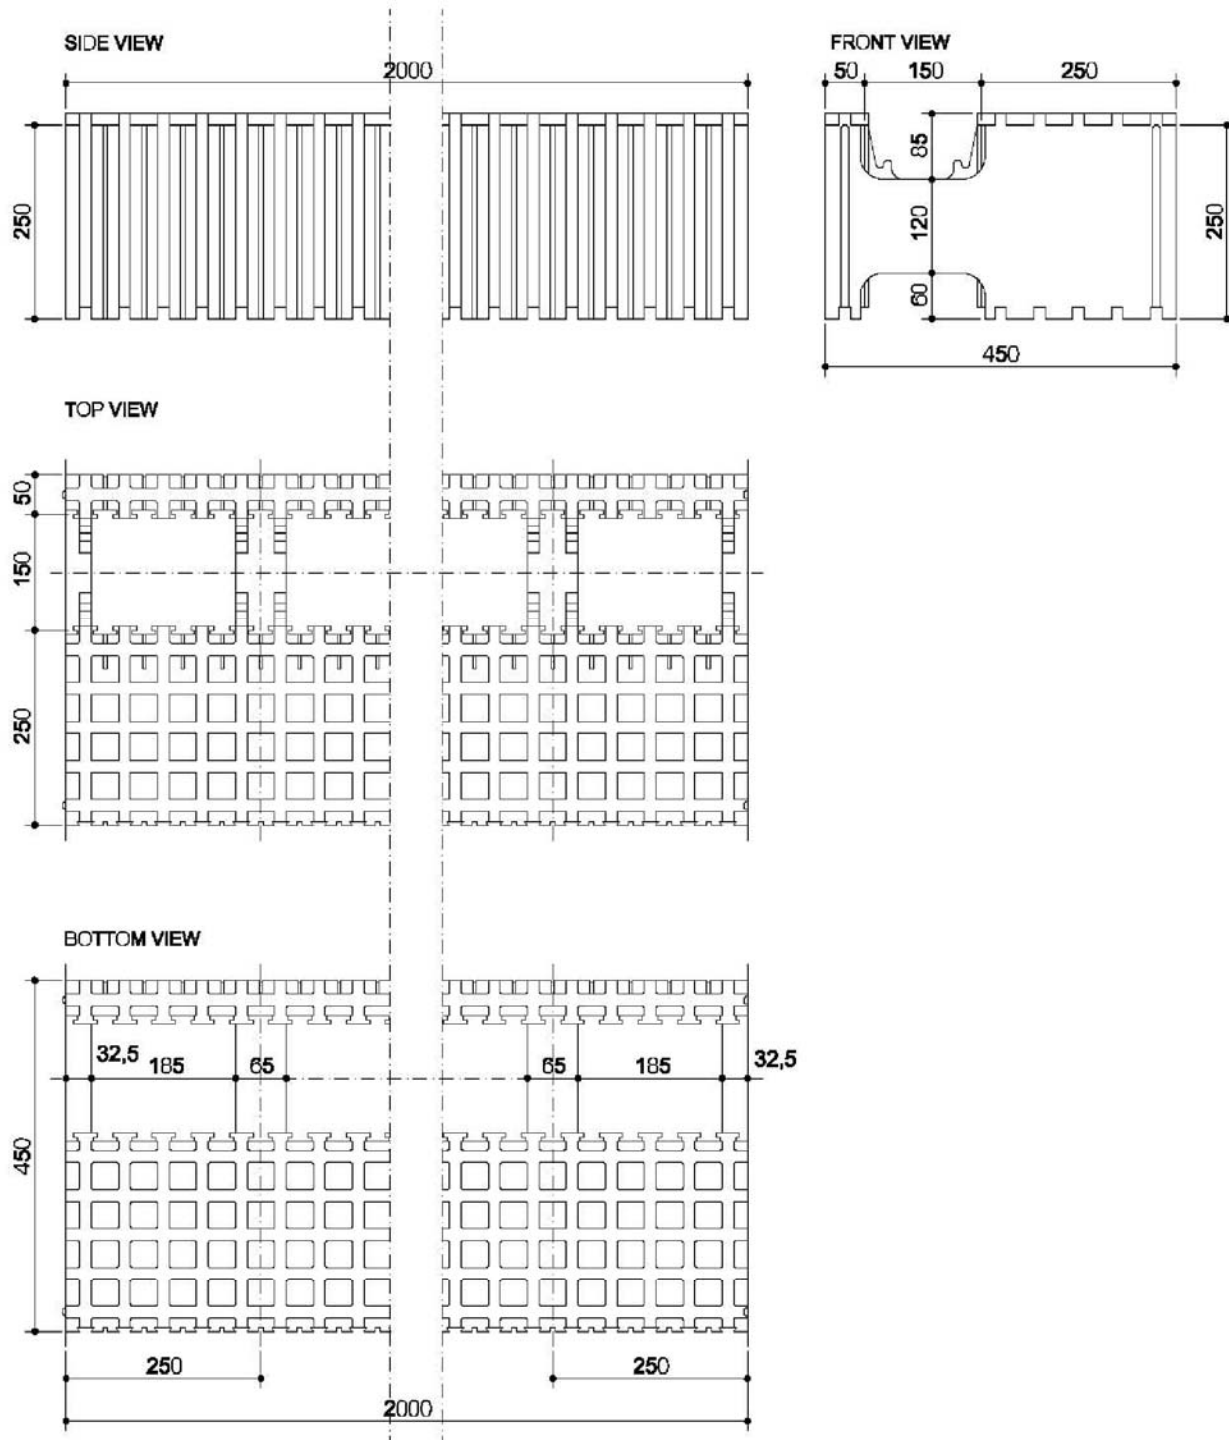


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
Primary block MC 2/45  
200cm x 45cm x 25cm


Annex A42

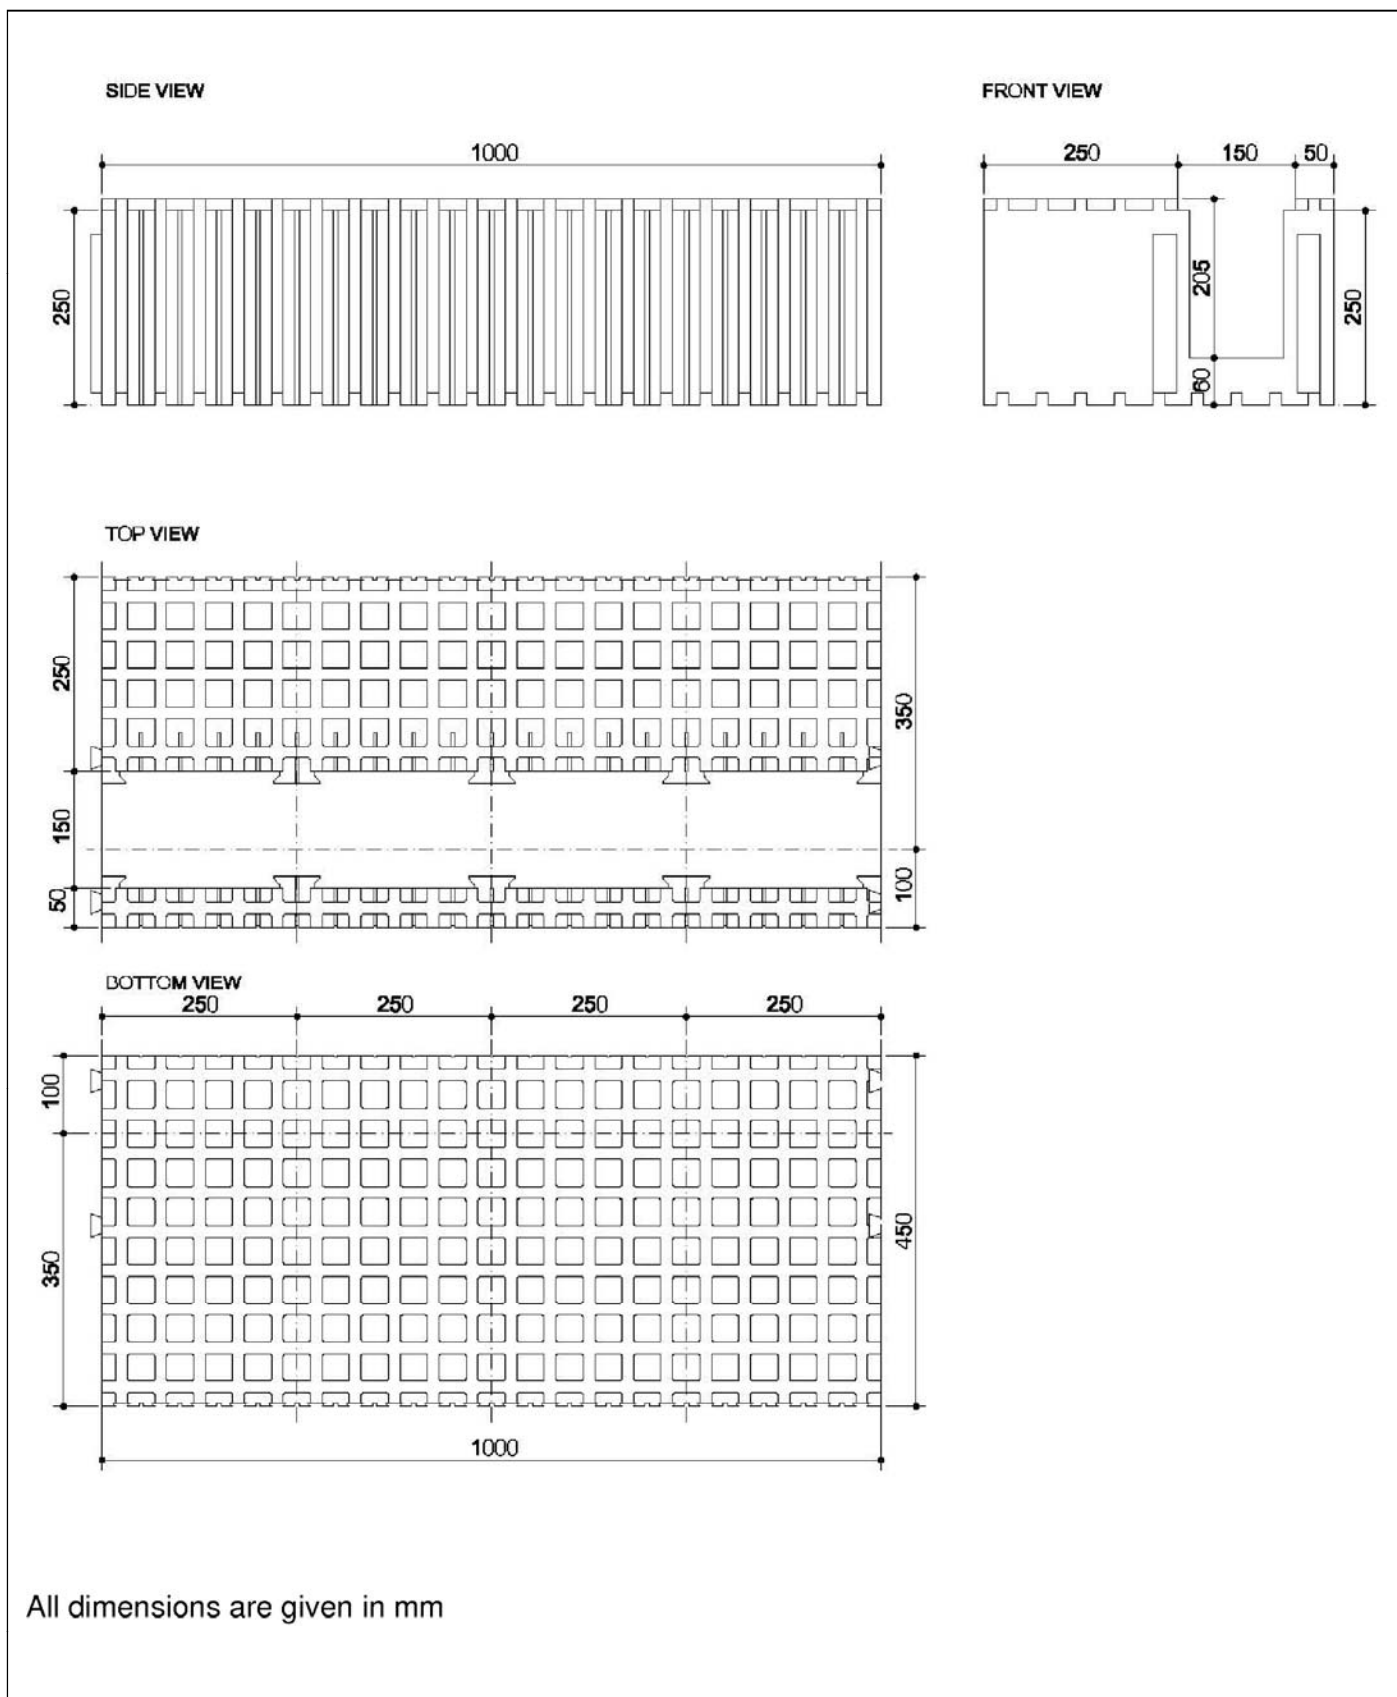

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
Header block ML 1/45  
100cm x 45cm x 25cm

Annex A43

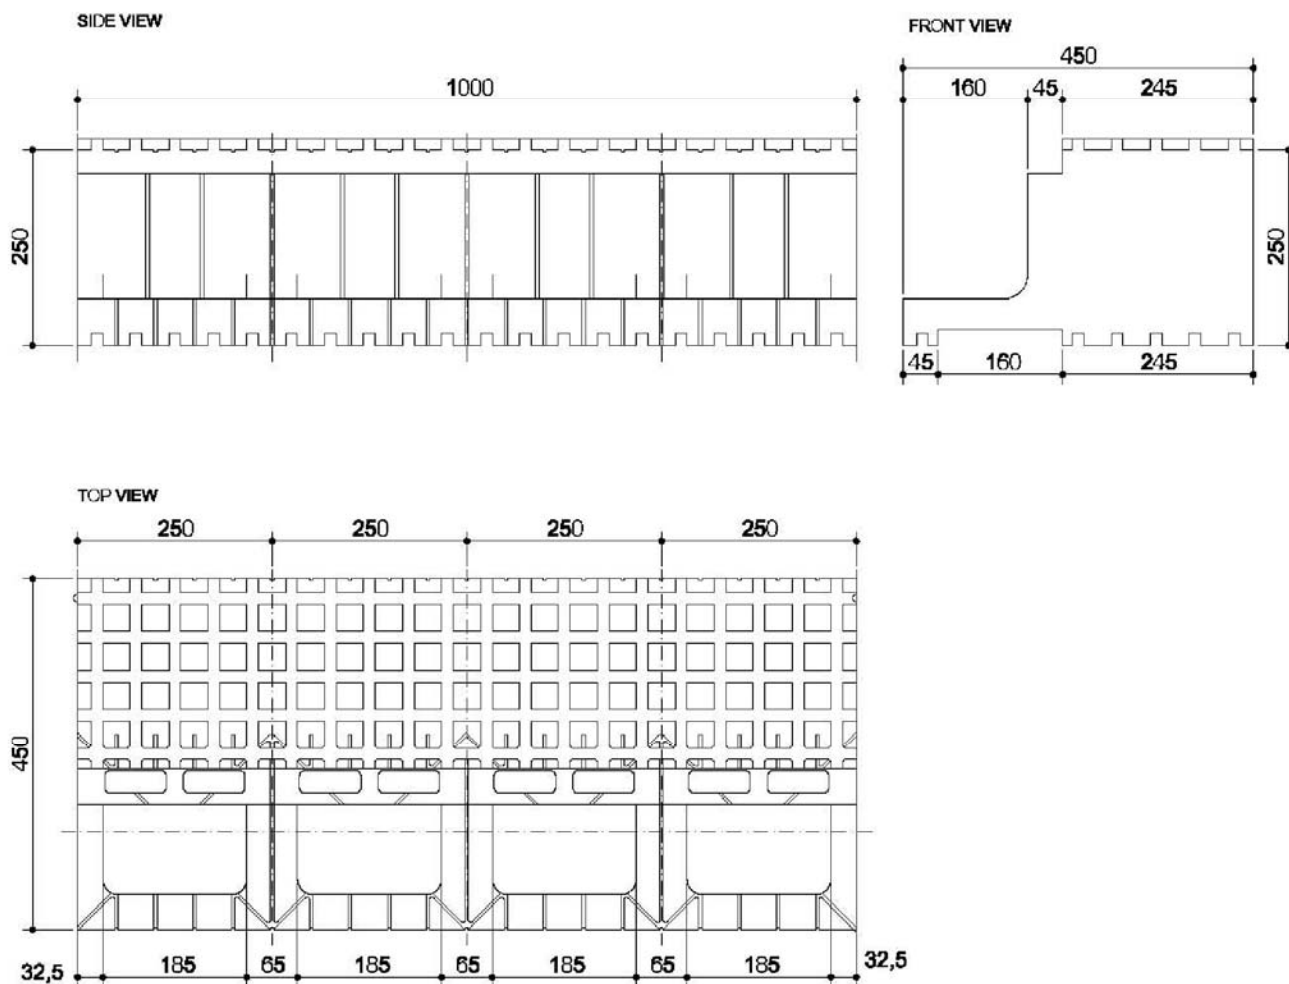


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
Floor support element MP 1/45  
100cm x 45cm x 25cm

Annex A44

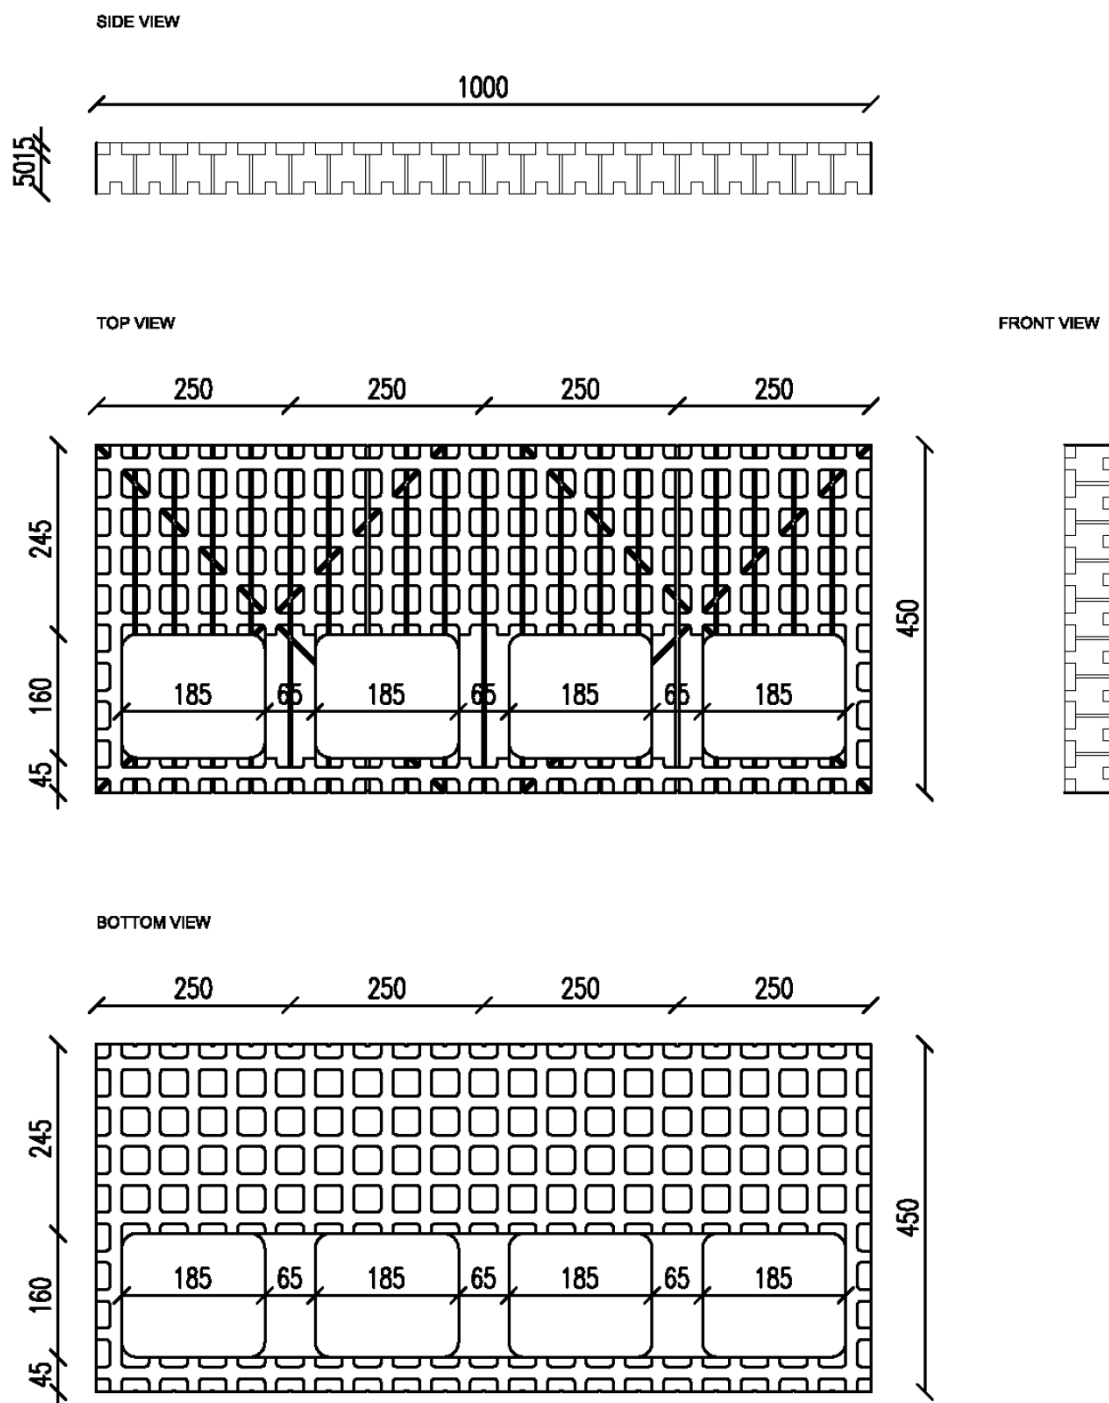


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
Heigh adapter MH 1/45  
100cm x 5cm x 45cm

Annex A45

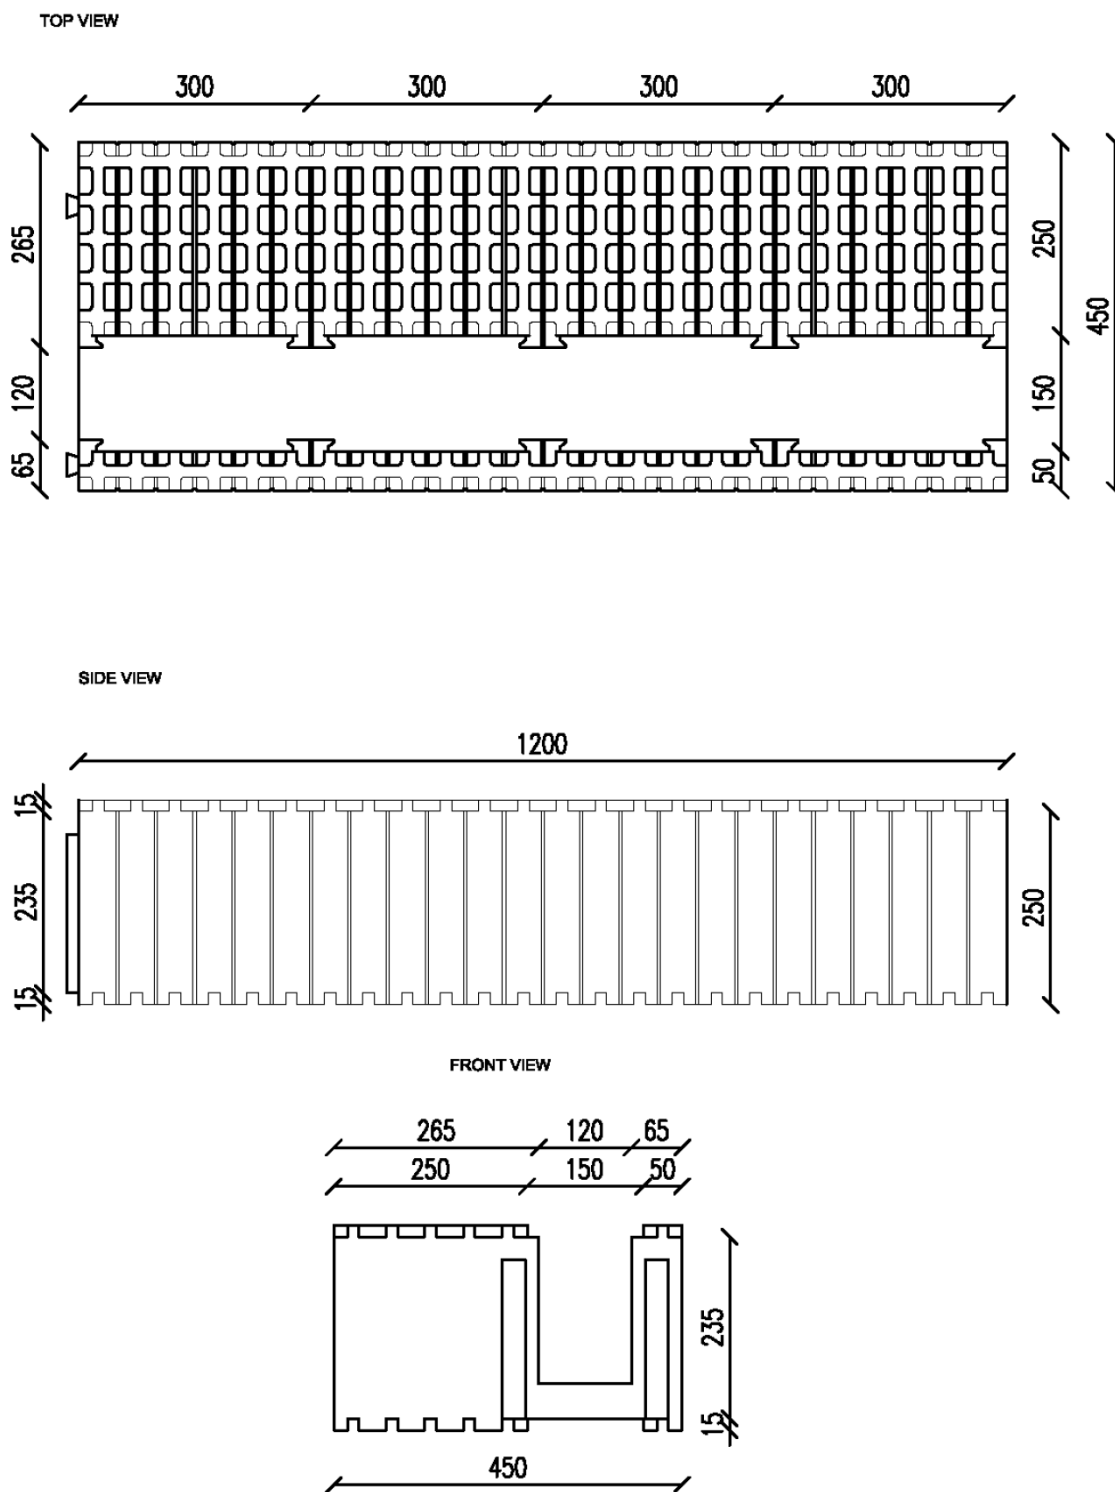


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
Door header element MLA 1,2/45  
120cm x 25cm x 45cm

Annex A46

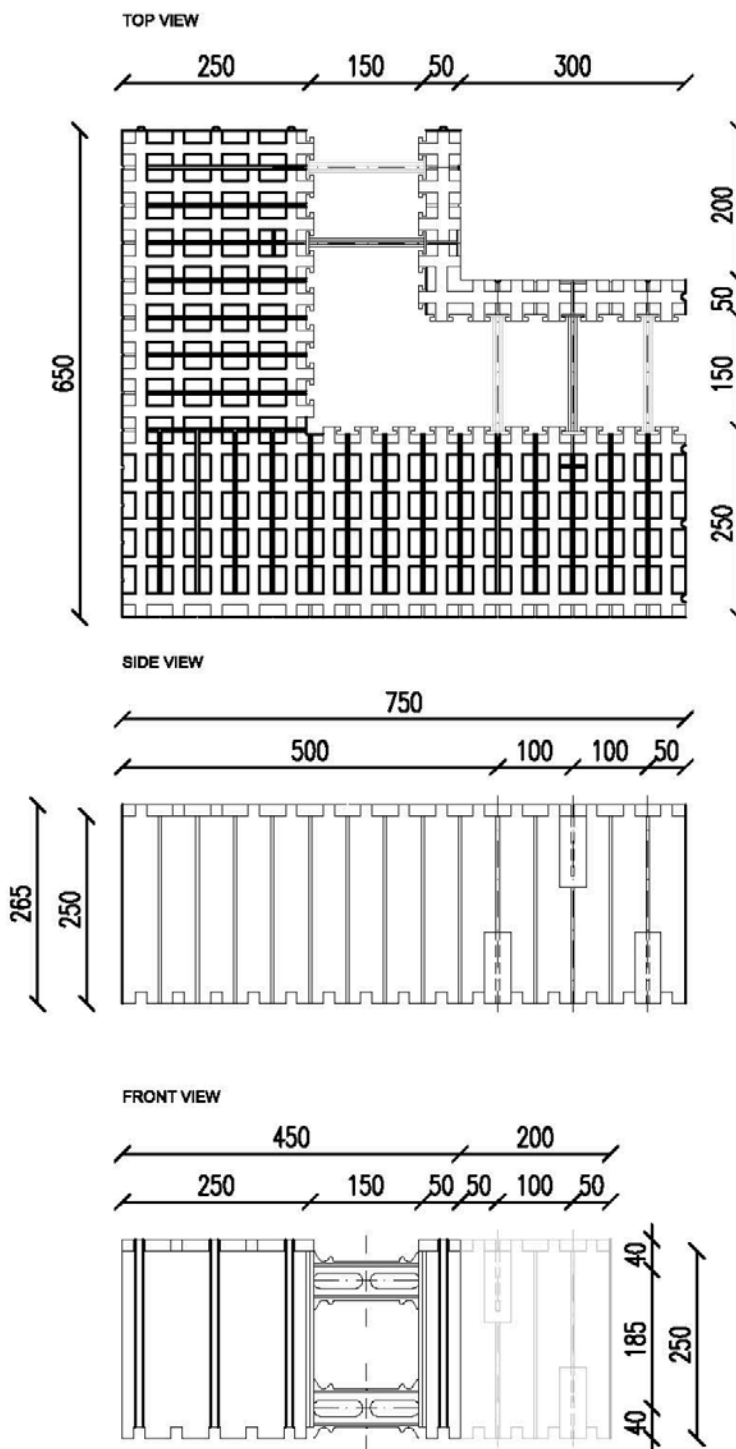


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
90° corner (external / left) MCFU 45 E90 LA  
140cm x 25cm x 45cm

Annex A47

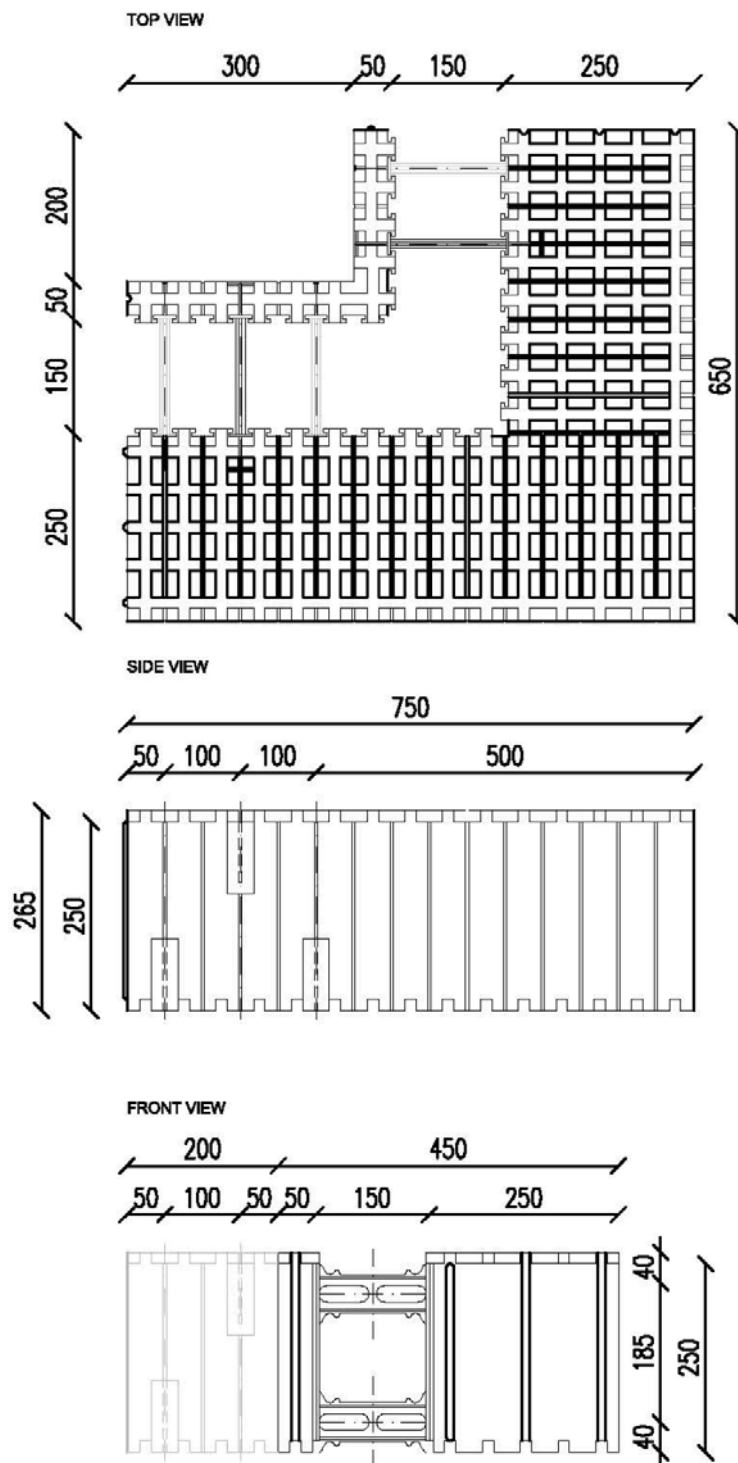


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
90° comer (external / right) MCFU 45 E90 RA  
140cm x 25cm x 45cm

Annex A48

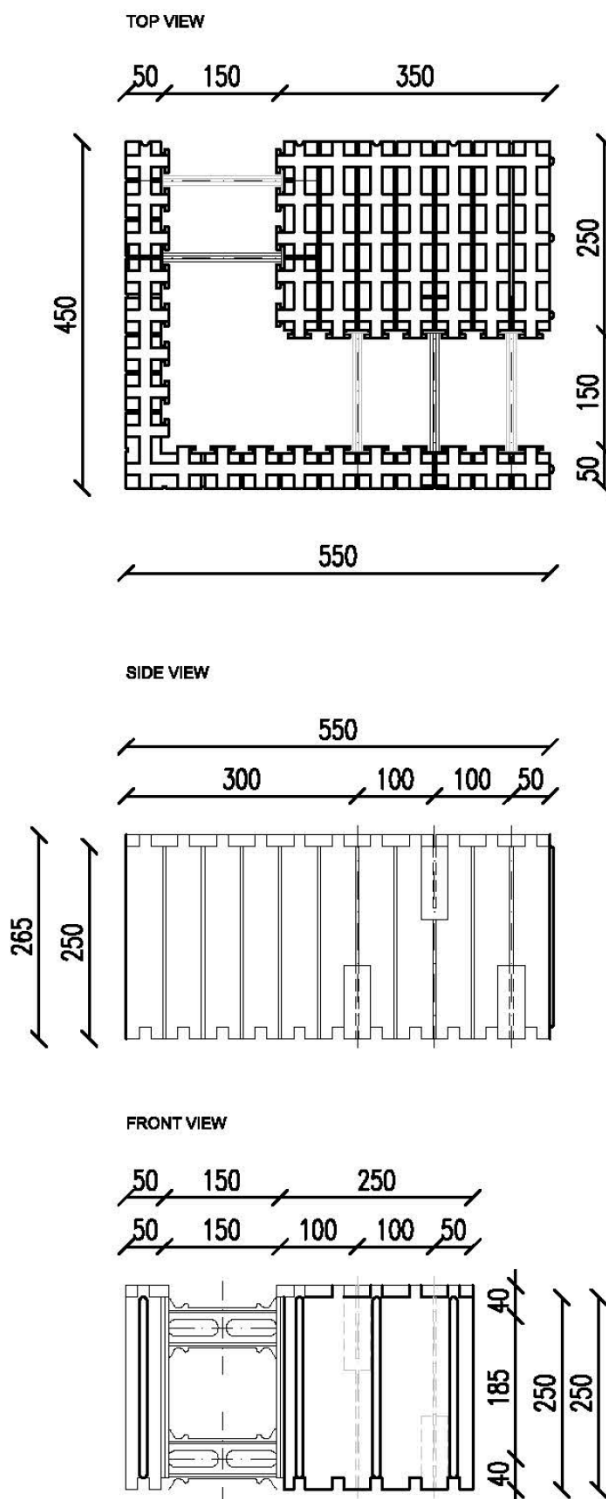


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
90° corner (internal / left) MCFU 45 E90 LI  
35cm x 25cm x 45cm

Annex A49

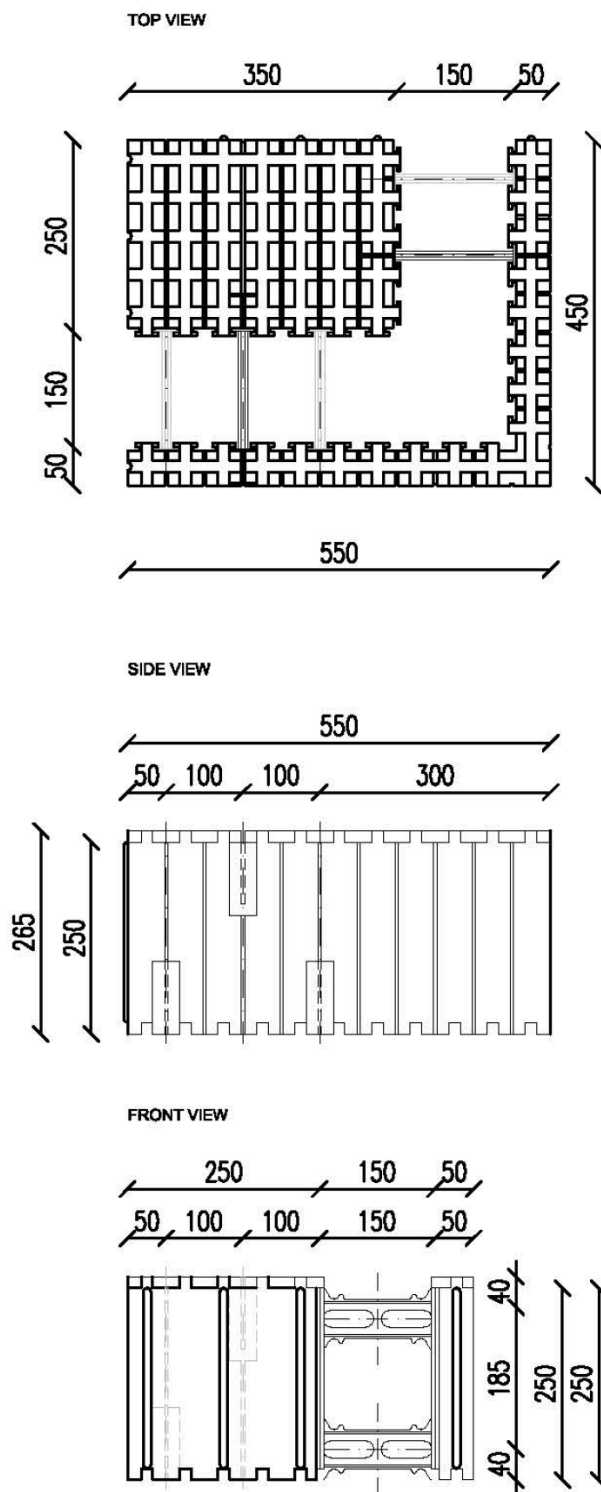


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "SUPER KING BLOCK"  
90° corner (internal / right) MCFU 45 E90 RI  
35cm x 25cm x 45cm

Annex A50

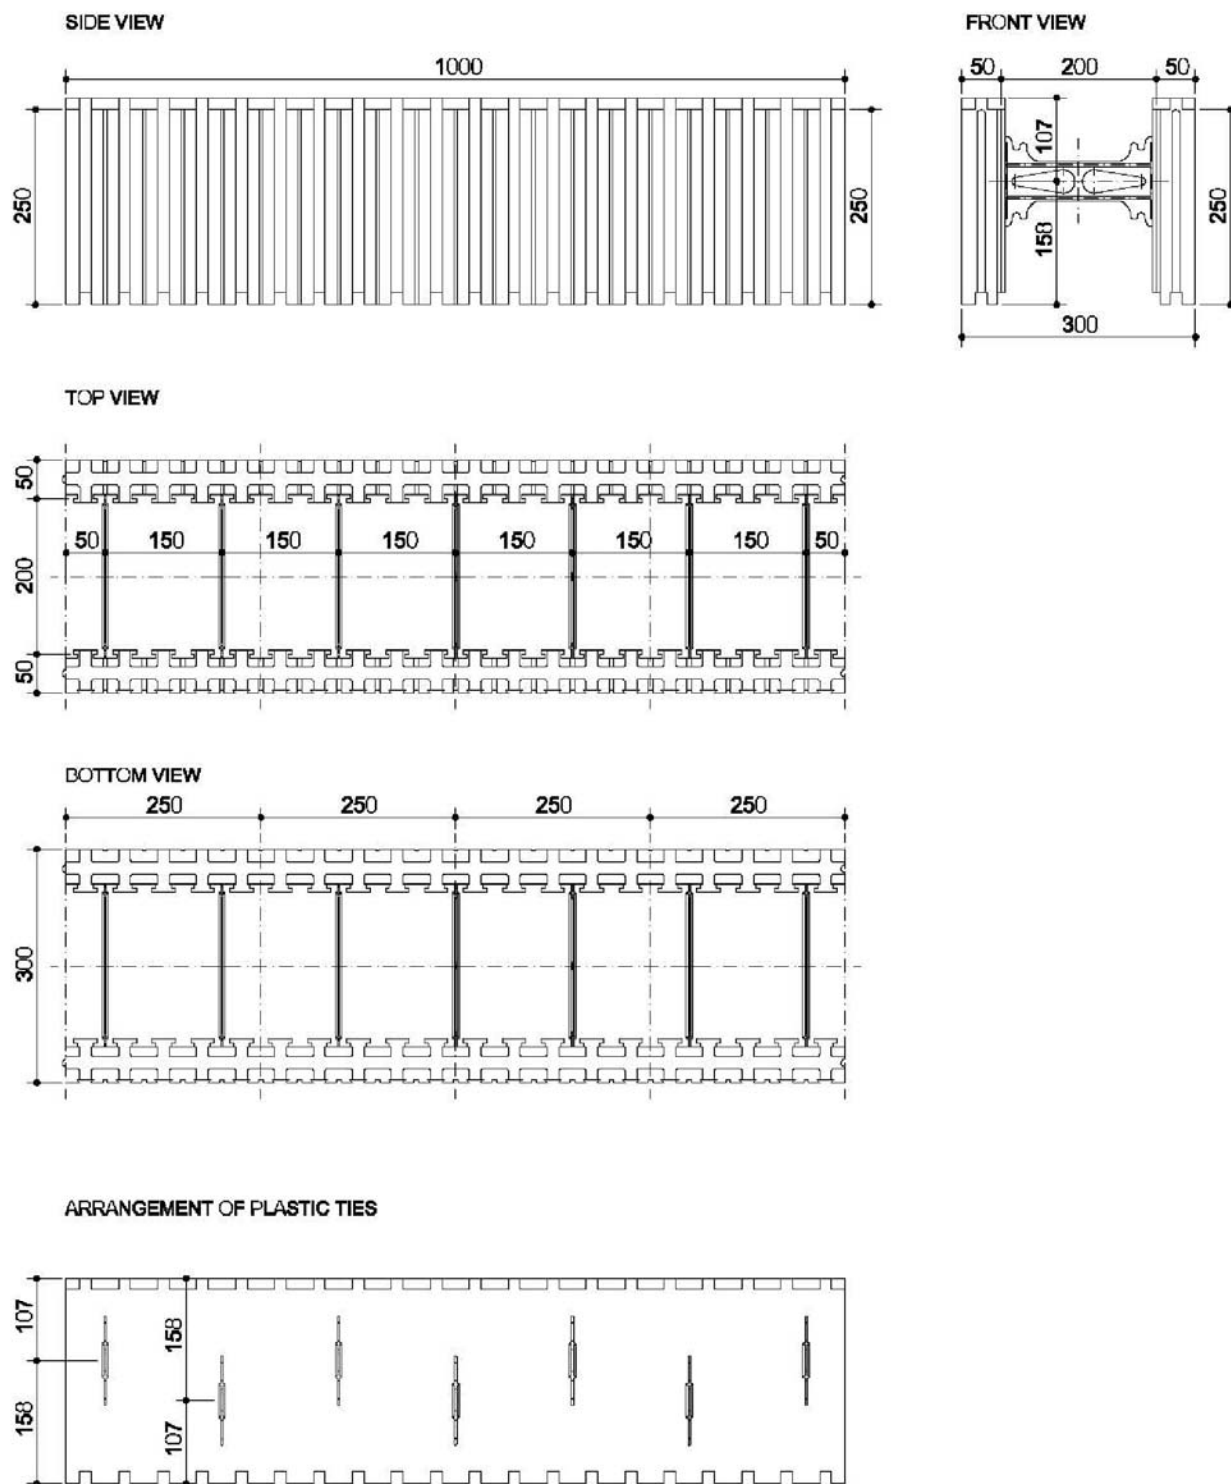


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "BLOCK PLUS"  
Basic element MCF 1/30+  
100cm x 30cm x 25cm


Annex A51

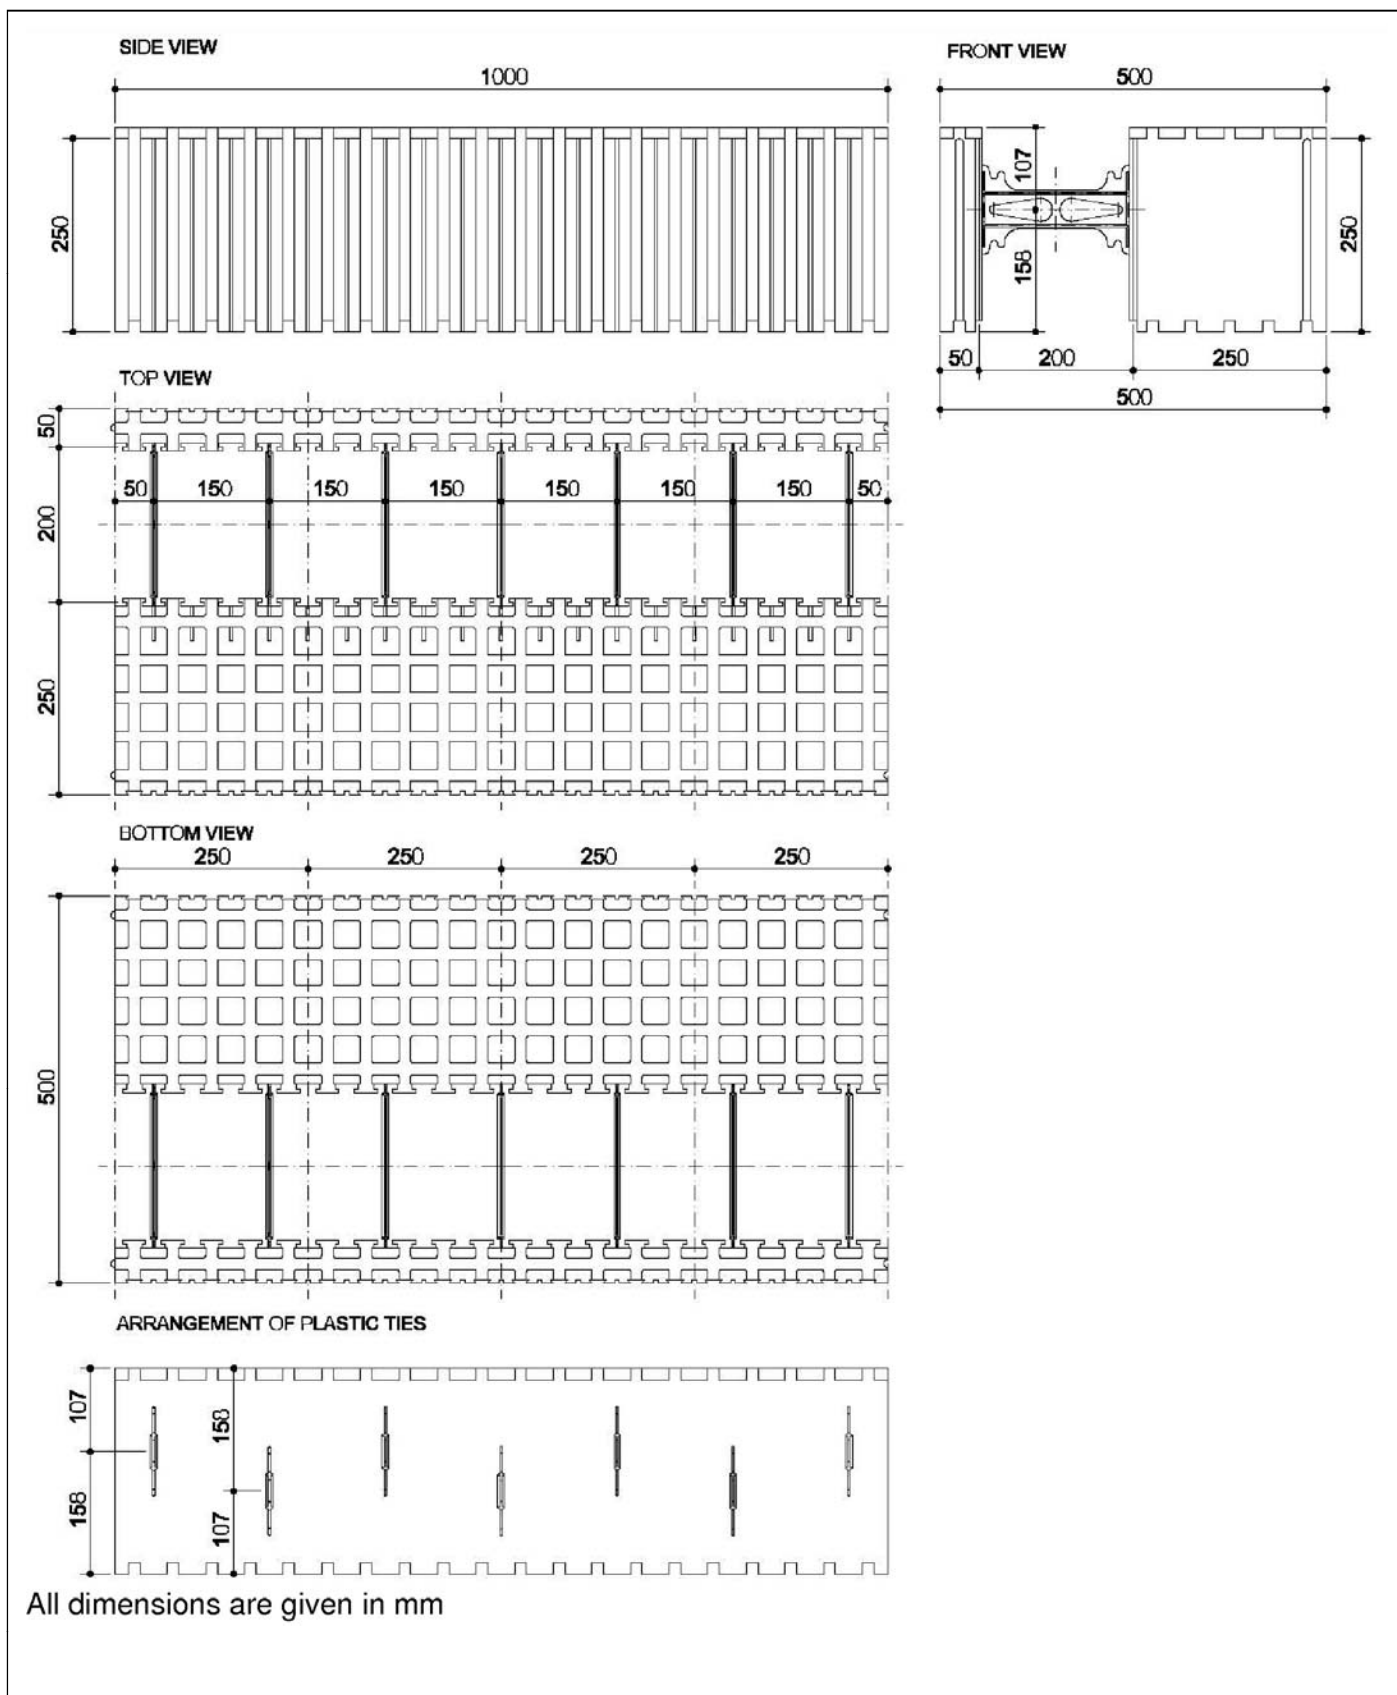

Permanent shuttering kit "IZODOM 2000 POLSKA"

SYSTEM: "BLOCK PLUS"  
Basic element MCF 1/50+  
100cm x 50cm x 25cm

Annex A52

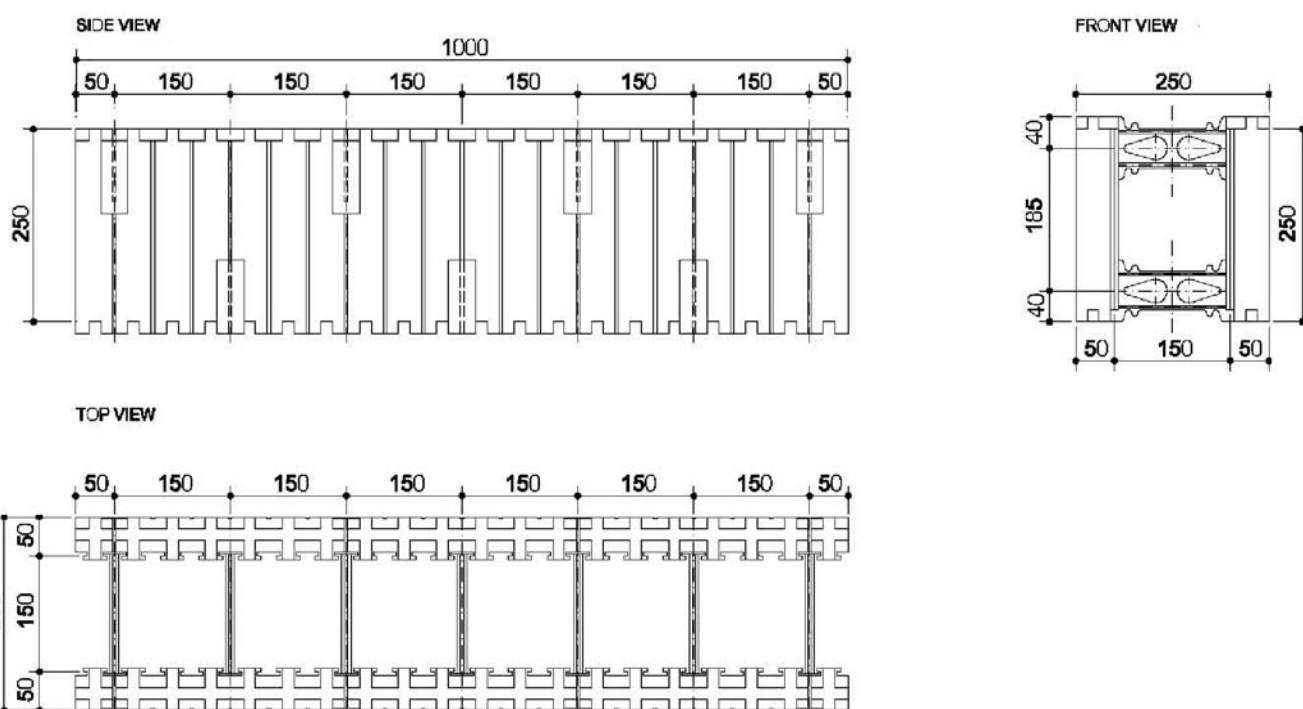


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
 Block with plastic tie MCFU 1/25  
 100cm x 25cm x 25cm

Annex A53

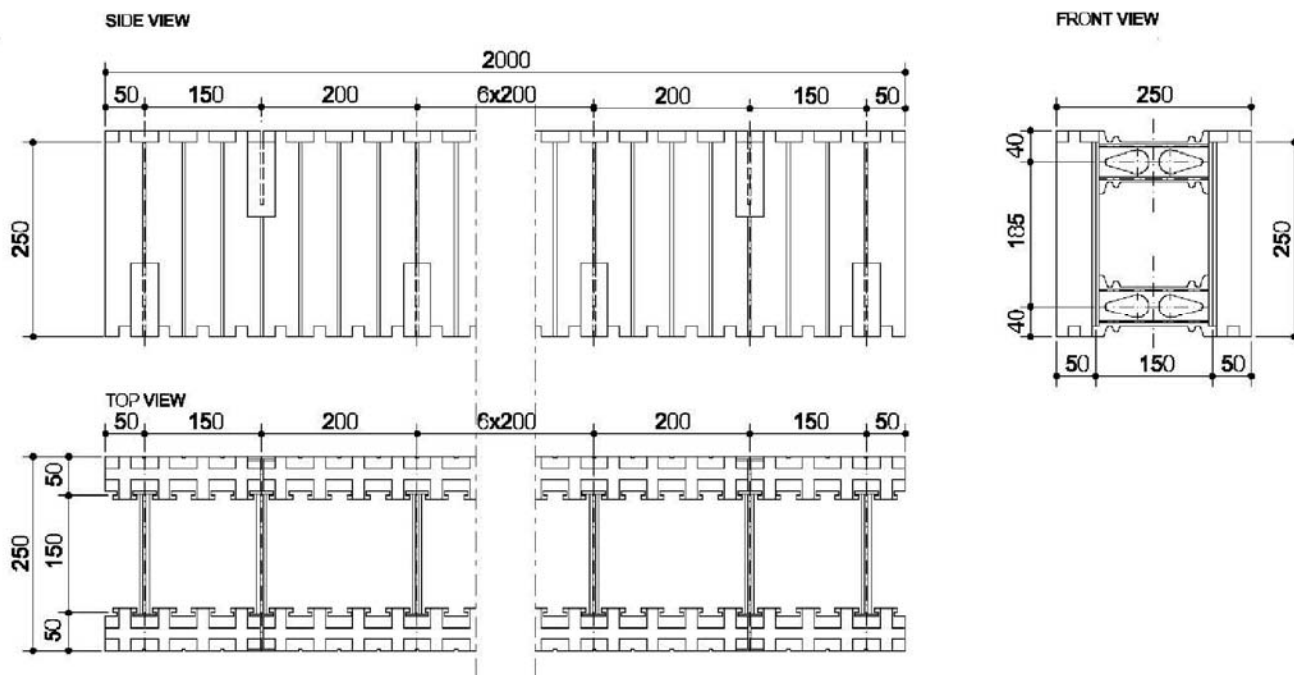


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/25  
200cm x 25cm x 25cm

Annex A54

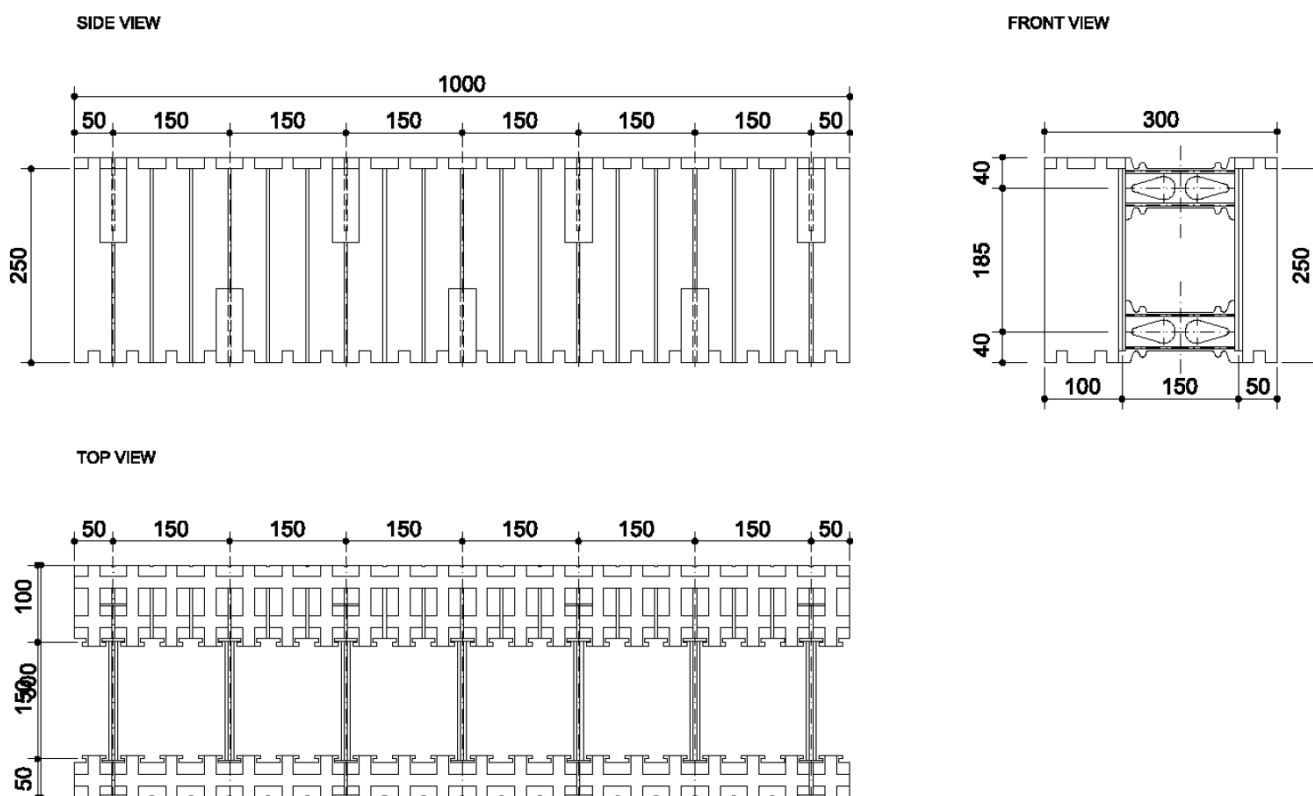


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 1/30  
100cm x 30cm x 25cm

Annex A55

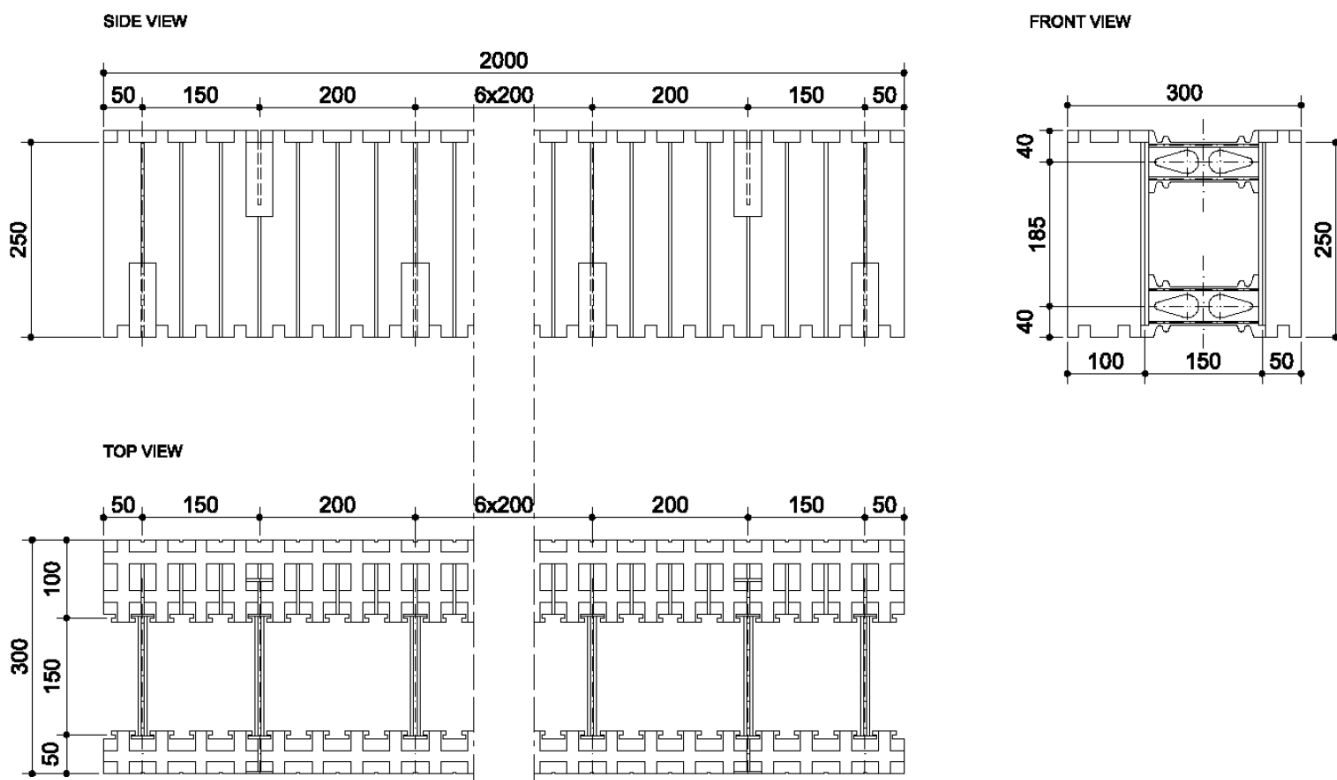


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/30  
200cm x 30cm x 25cm

Annex A56

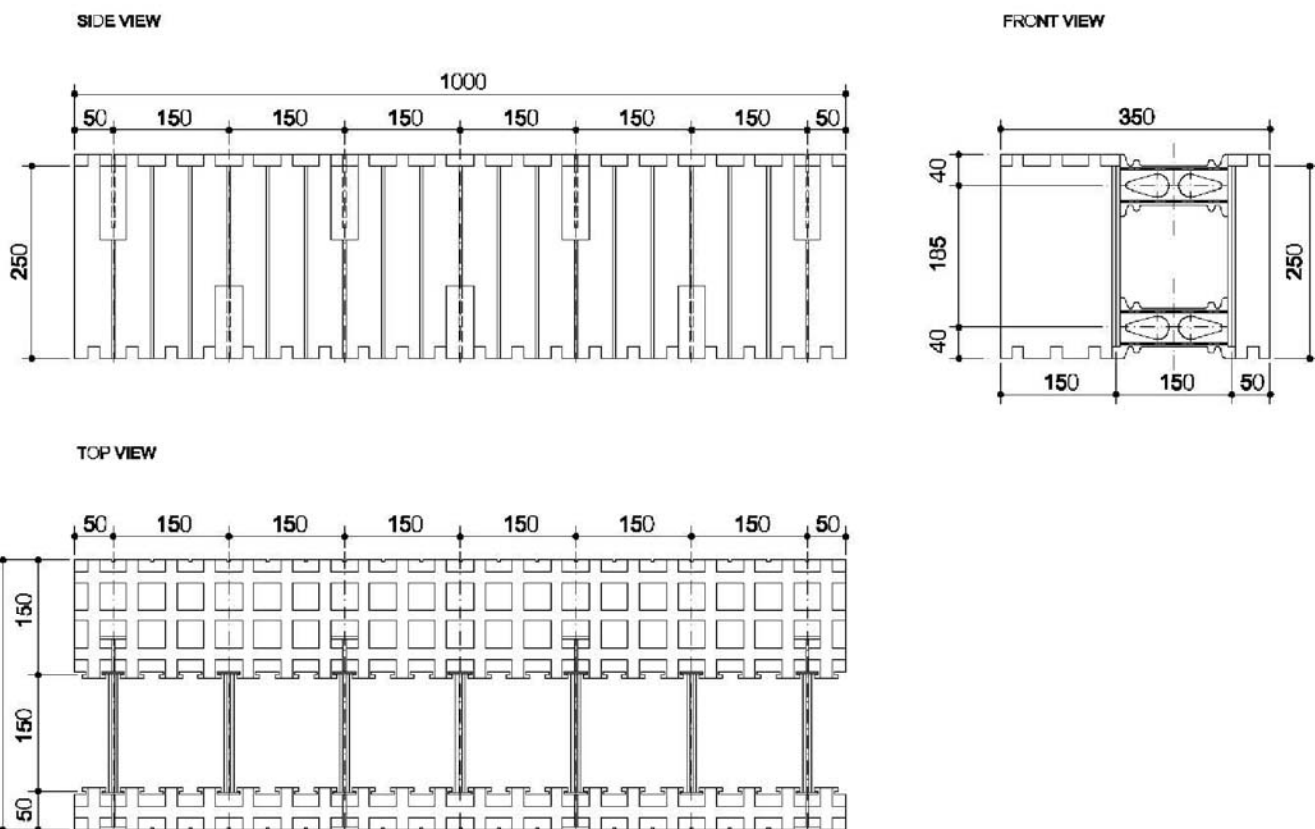


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 1/35  
100cm x 35cm x 25cm

Annex A57



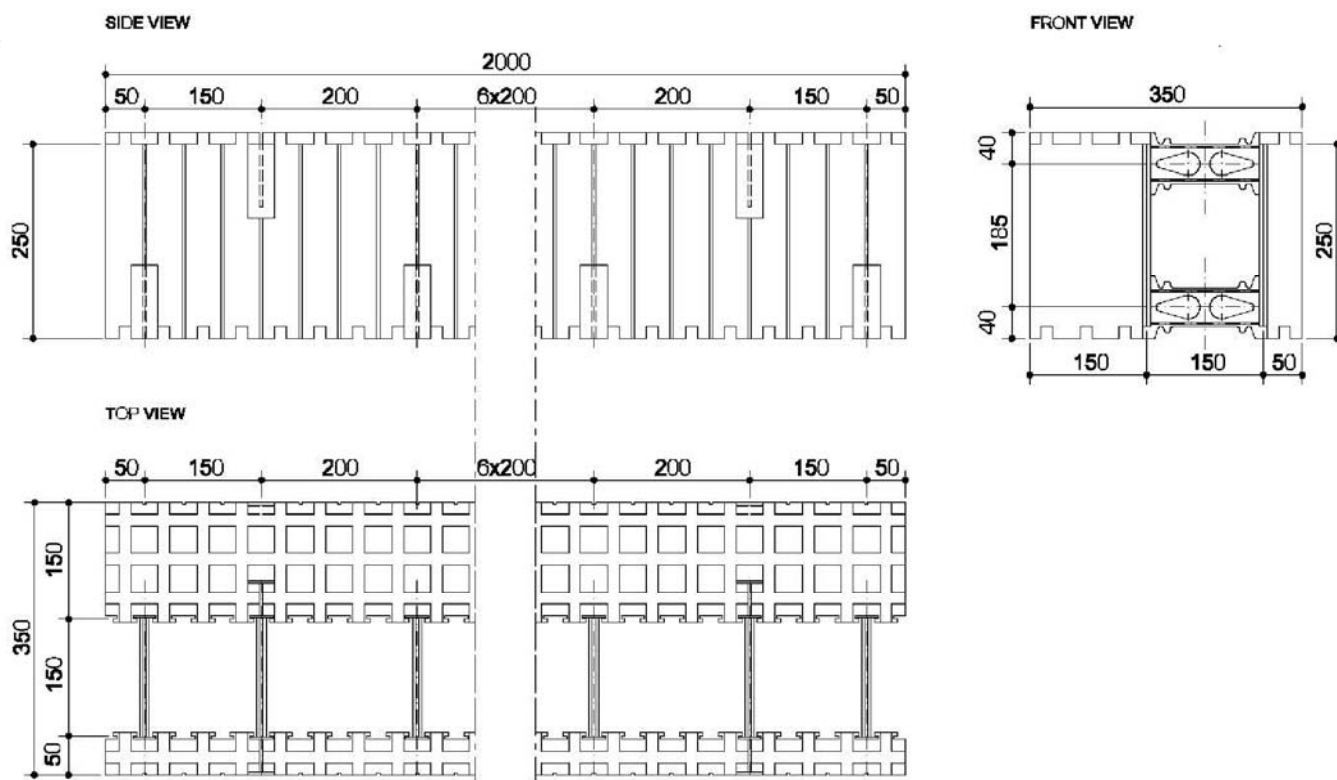


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/35  
200cm x 35cm x 25cm

Annex A58

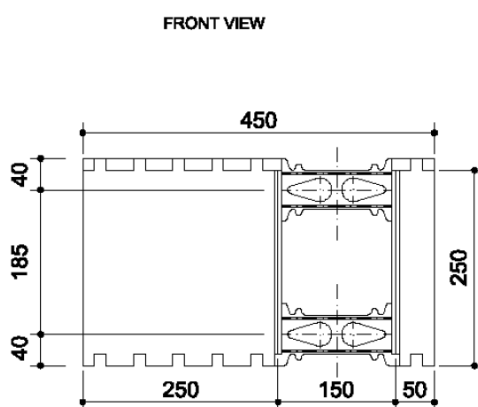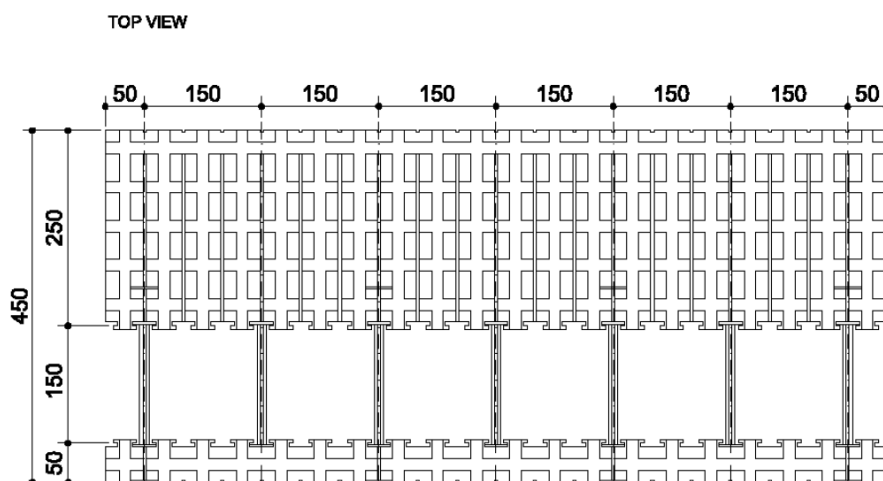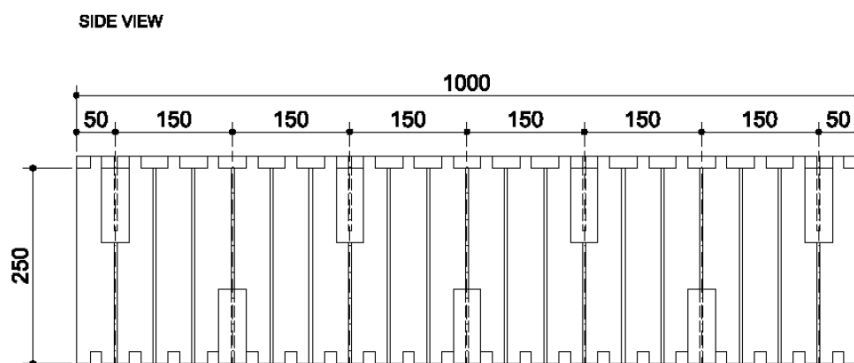


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 1/45  
100cm x 45cm x 25cm

Annex A59

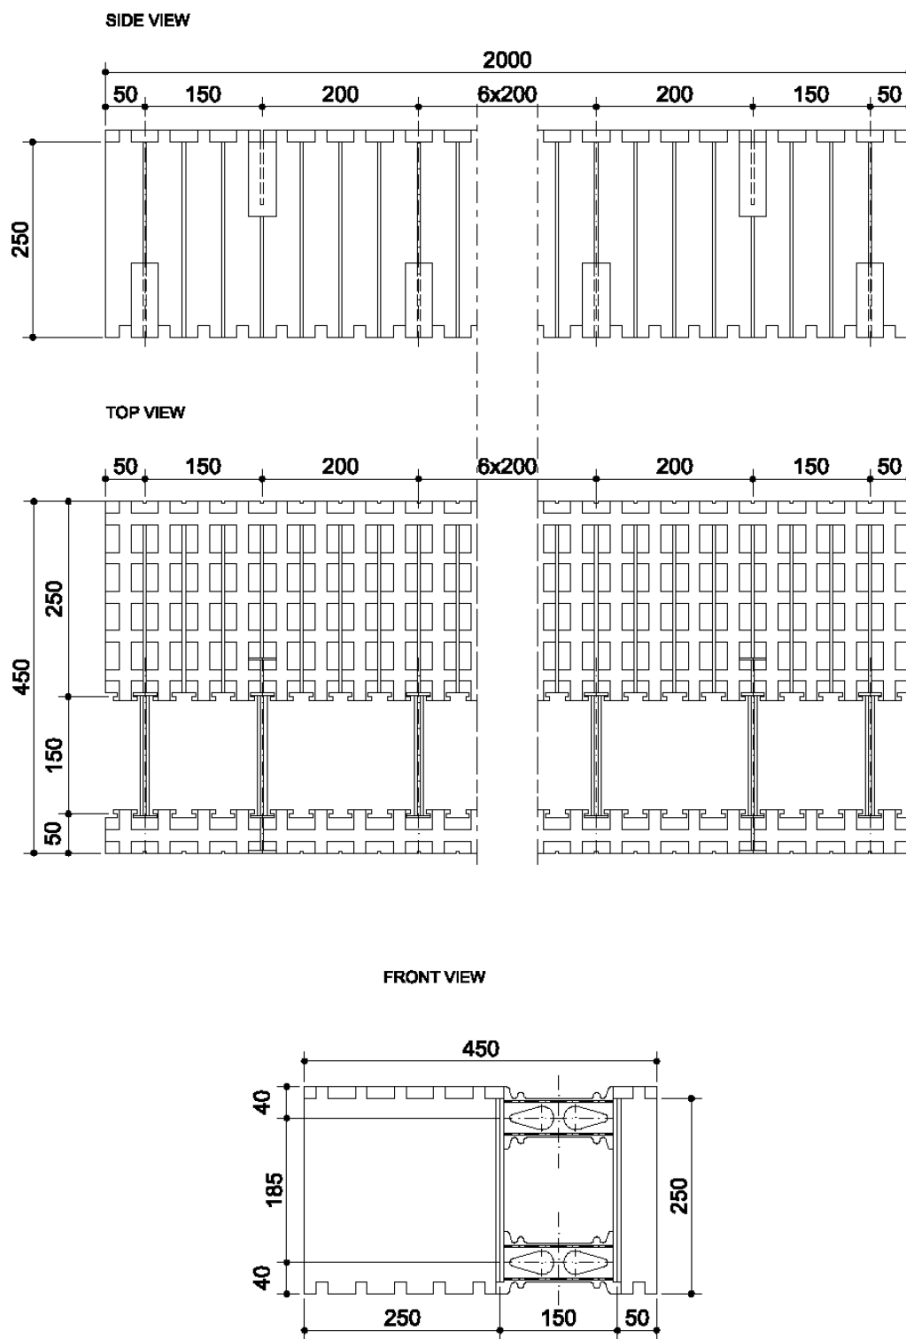


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/45  
200cm x 45cm x 25cm

Annex A60

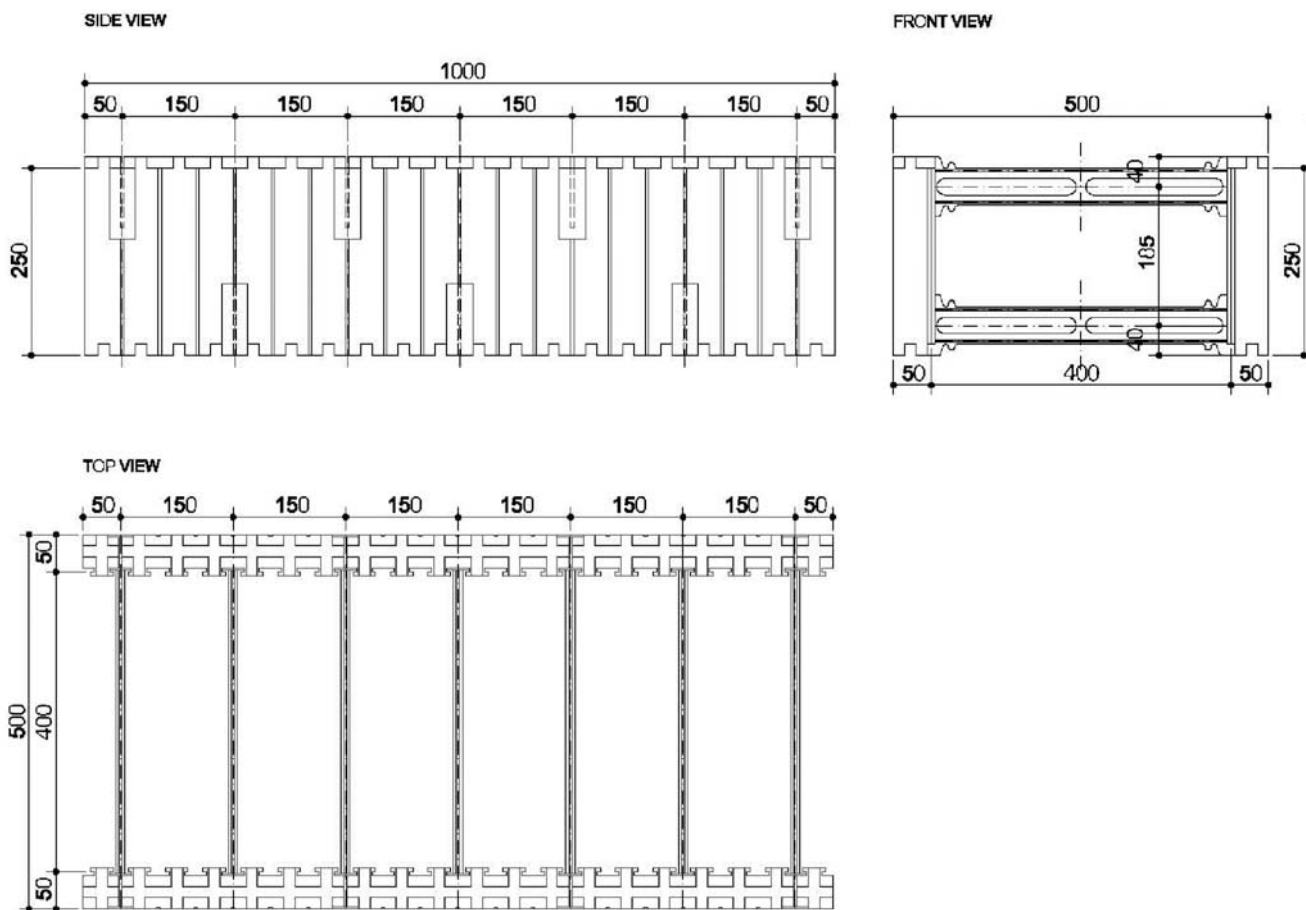


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 1/50  
100cm x 50cm x 25cm

Annex A61

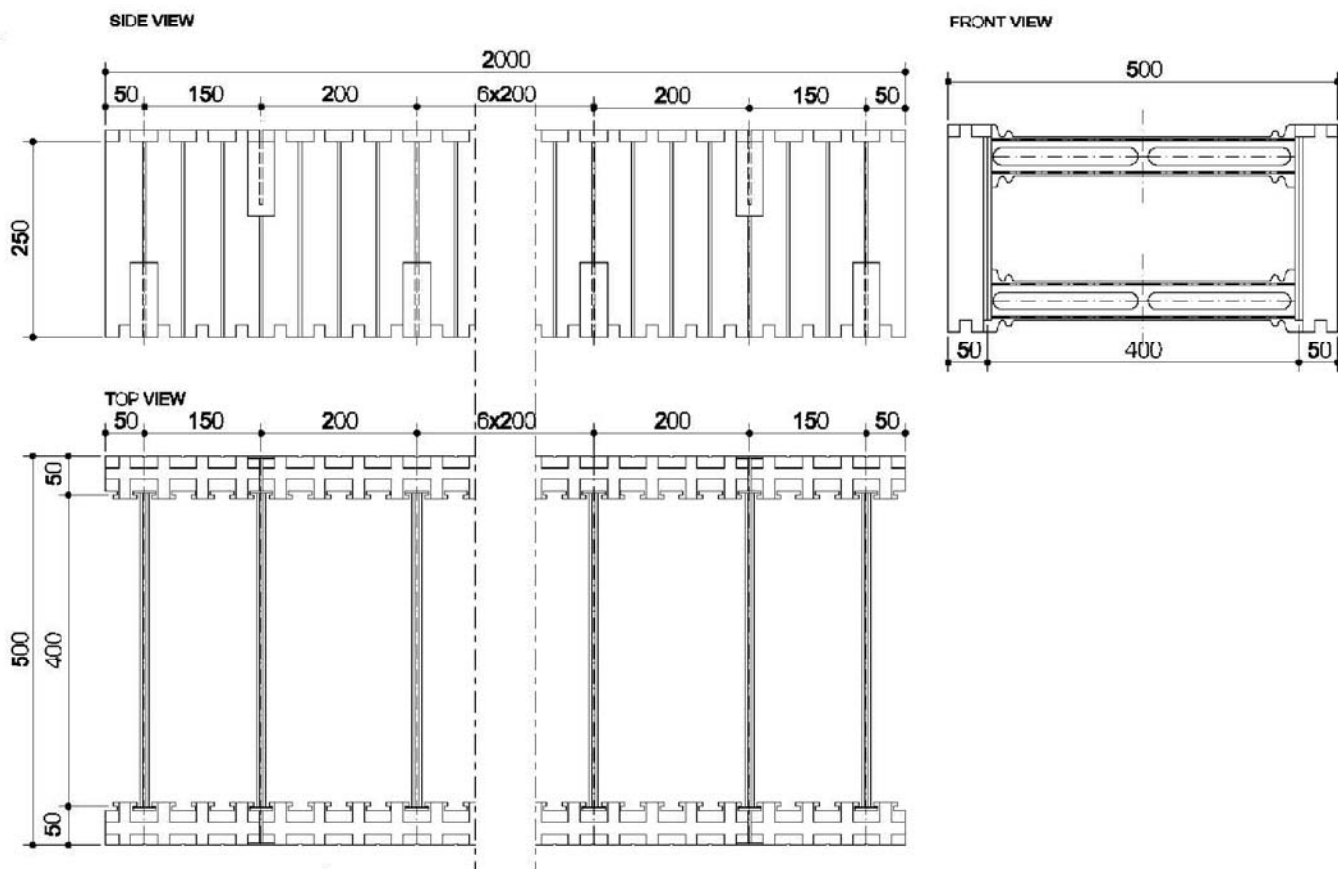


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/50  
200cm x 50cm x 25cm

Annex A62

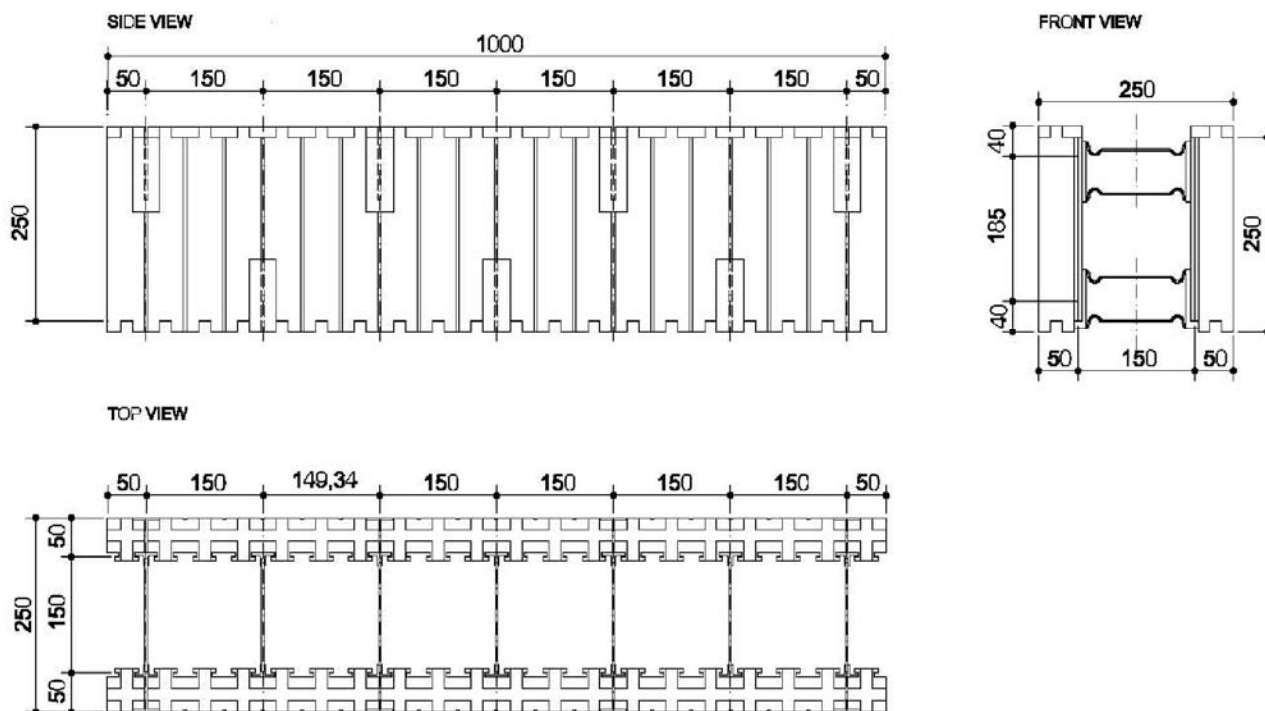


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 1/25  
100cm x 25cm x 25cm

Annex A63

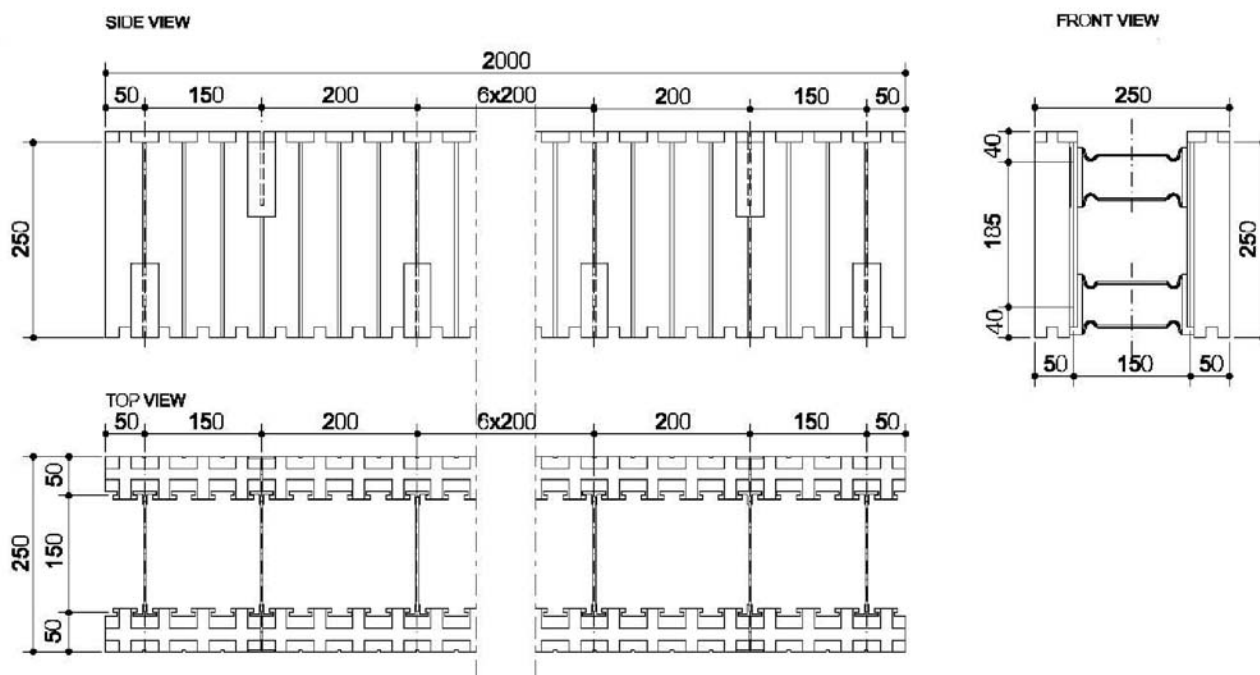


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 2/25  
200cm x 25cm x 25cm

Annex A64

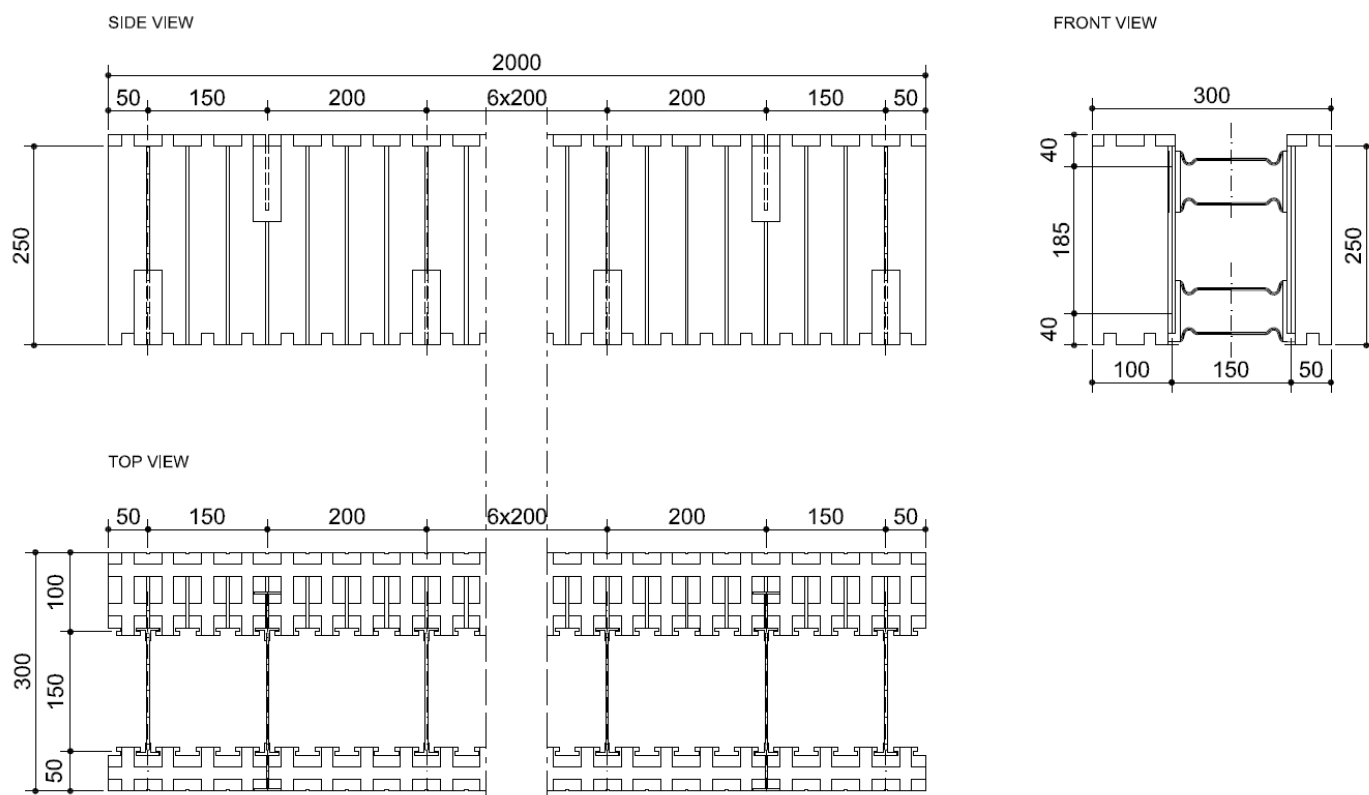


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 2/30  
200cm x 30cm x 25cm

Annex A65

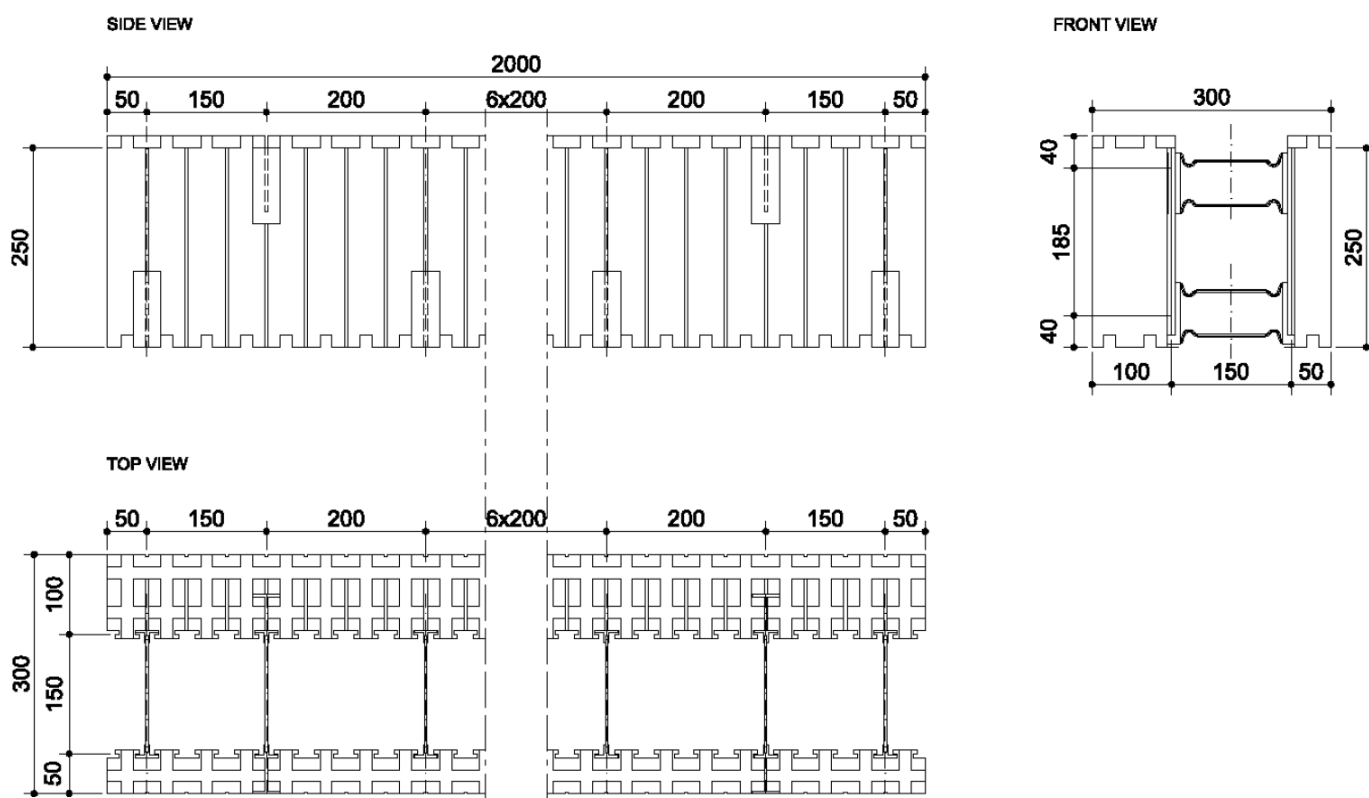


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 1/30  
100cm x 30cm x 25cm

Annex A66

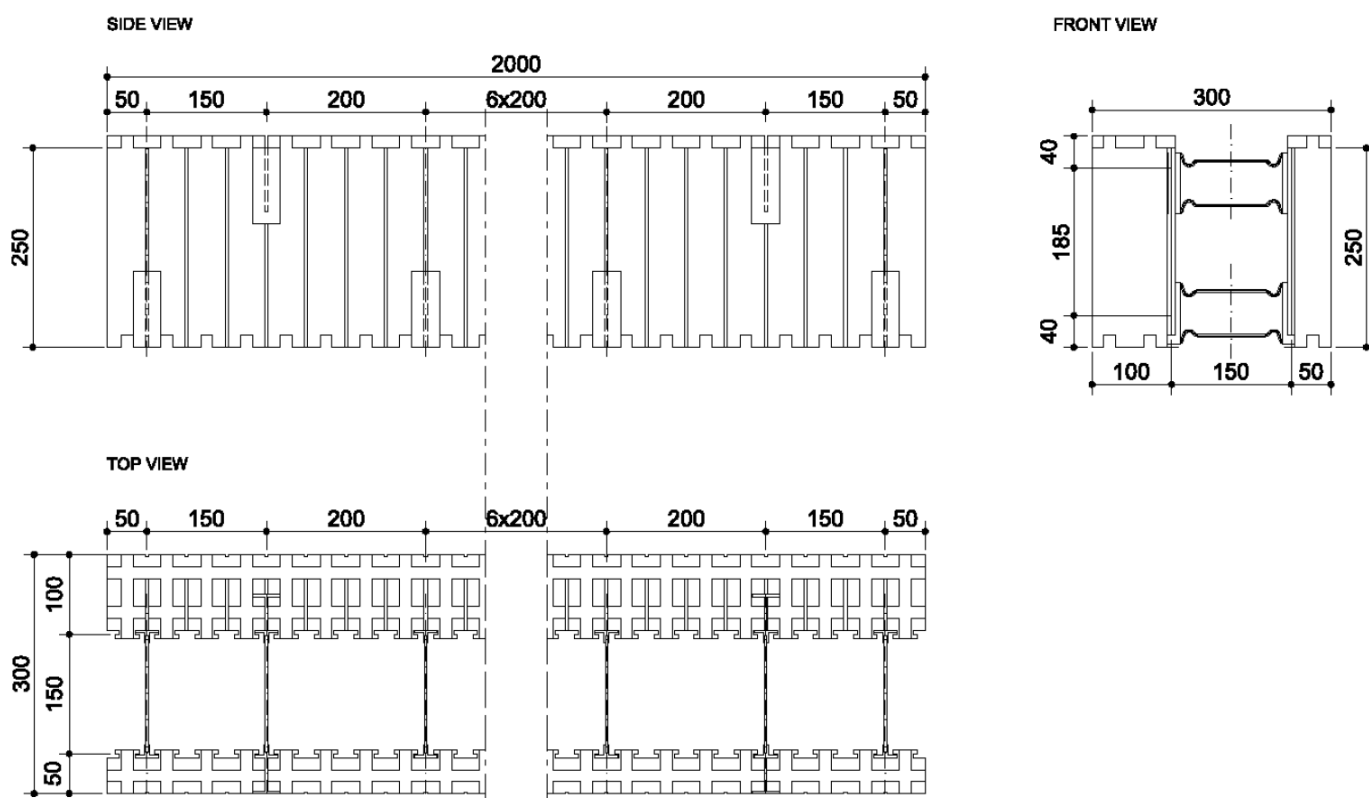


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 1/35  
100cm x 35cm x 25cm

Annex A67

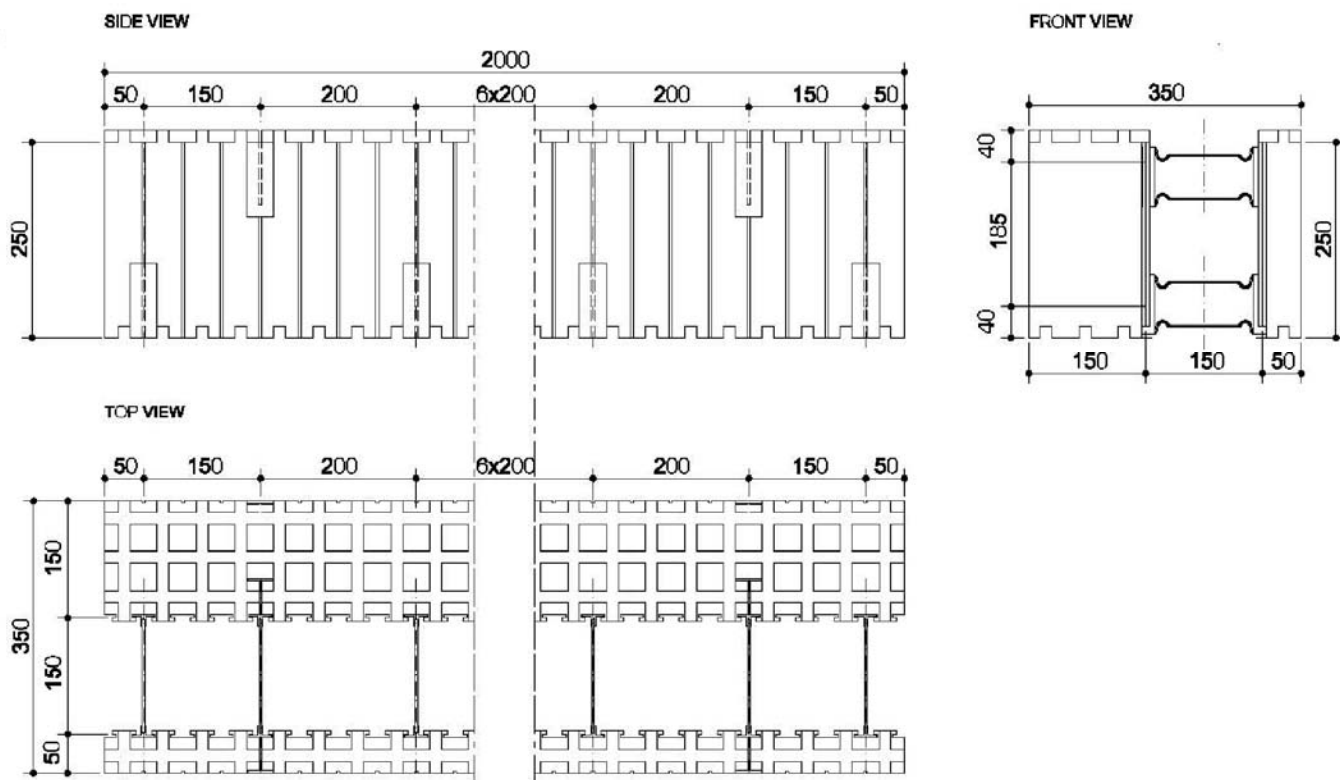


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 2/35  
200cm x 35cm x 25cm

Annex A68

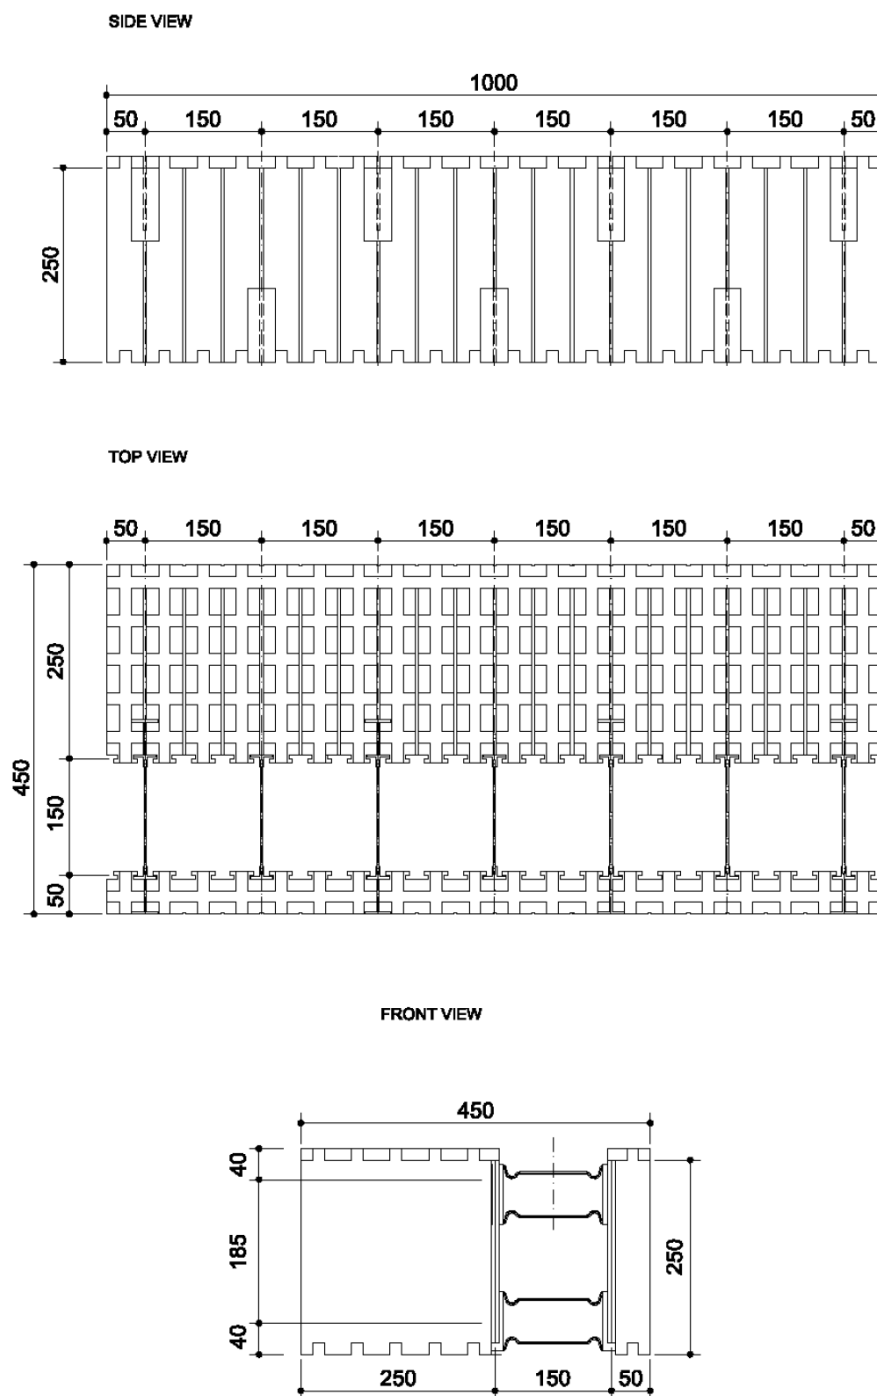


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 1/45  
100cm x 45cm x 25cm

Annex A69

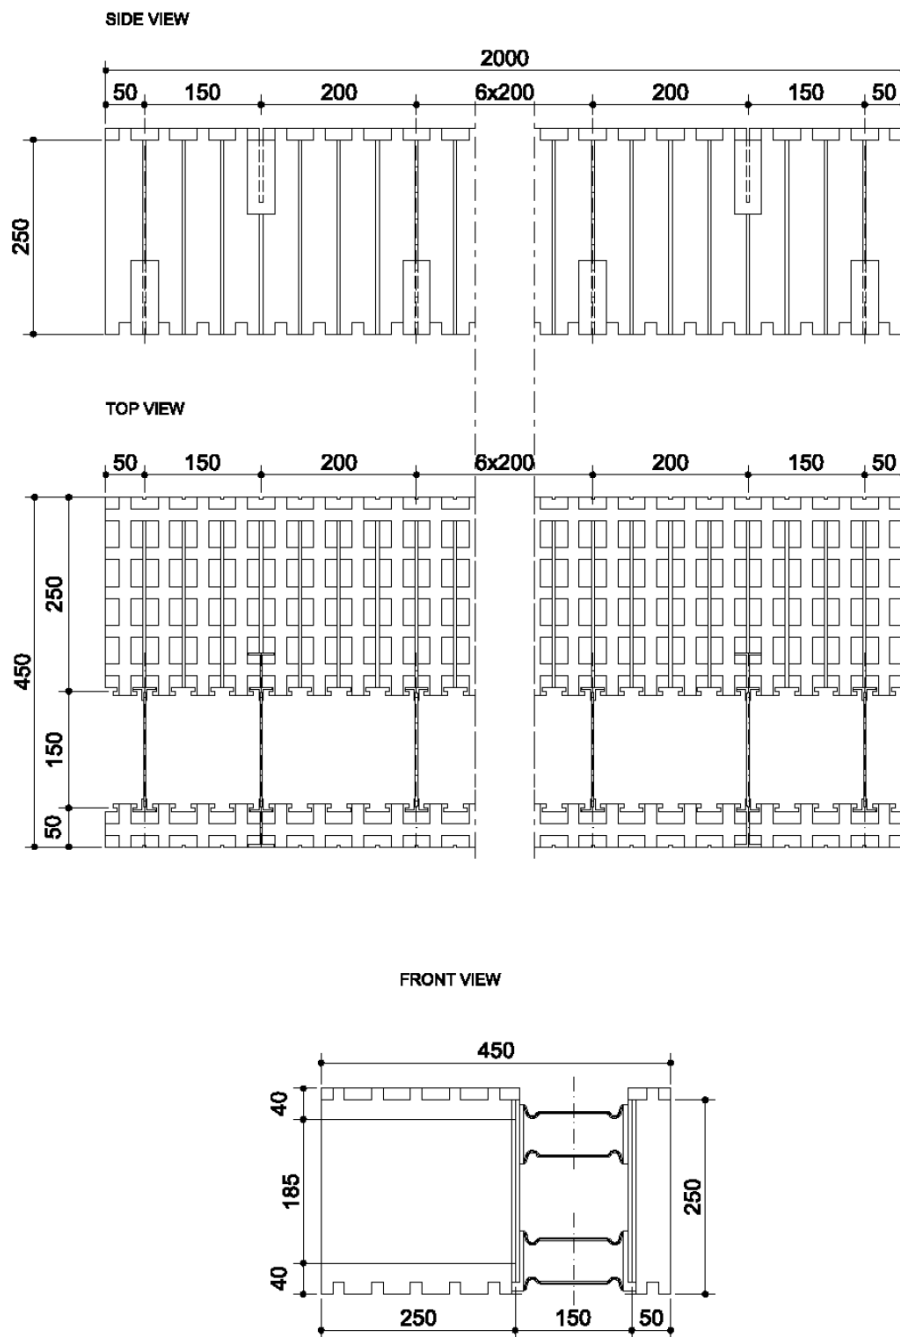


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 2/45  
200cm x 45cm x 25cm

Annex A70

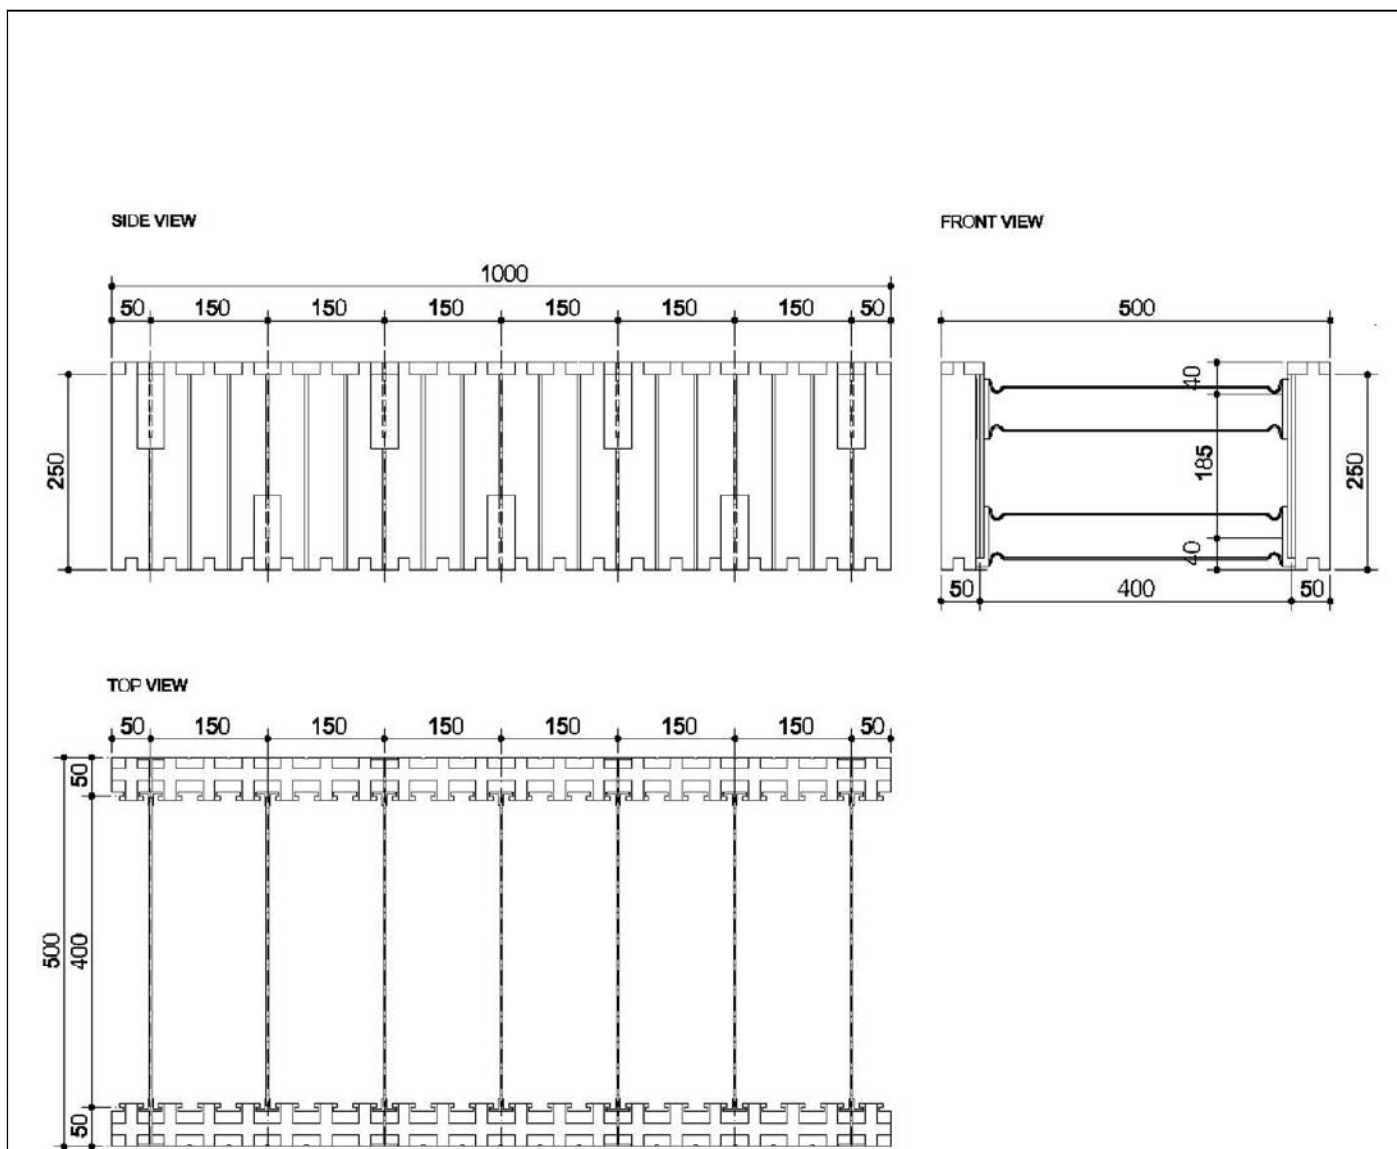


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 1/50  
100cm x 50cm x 25cm

Annex A71

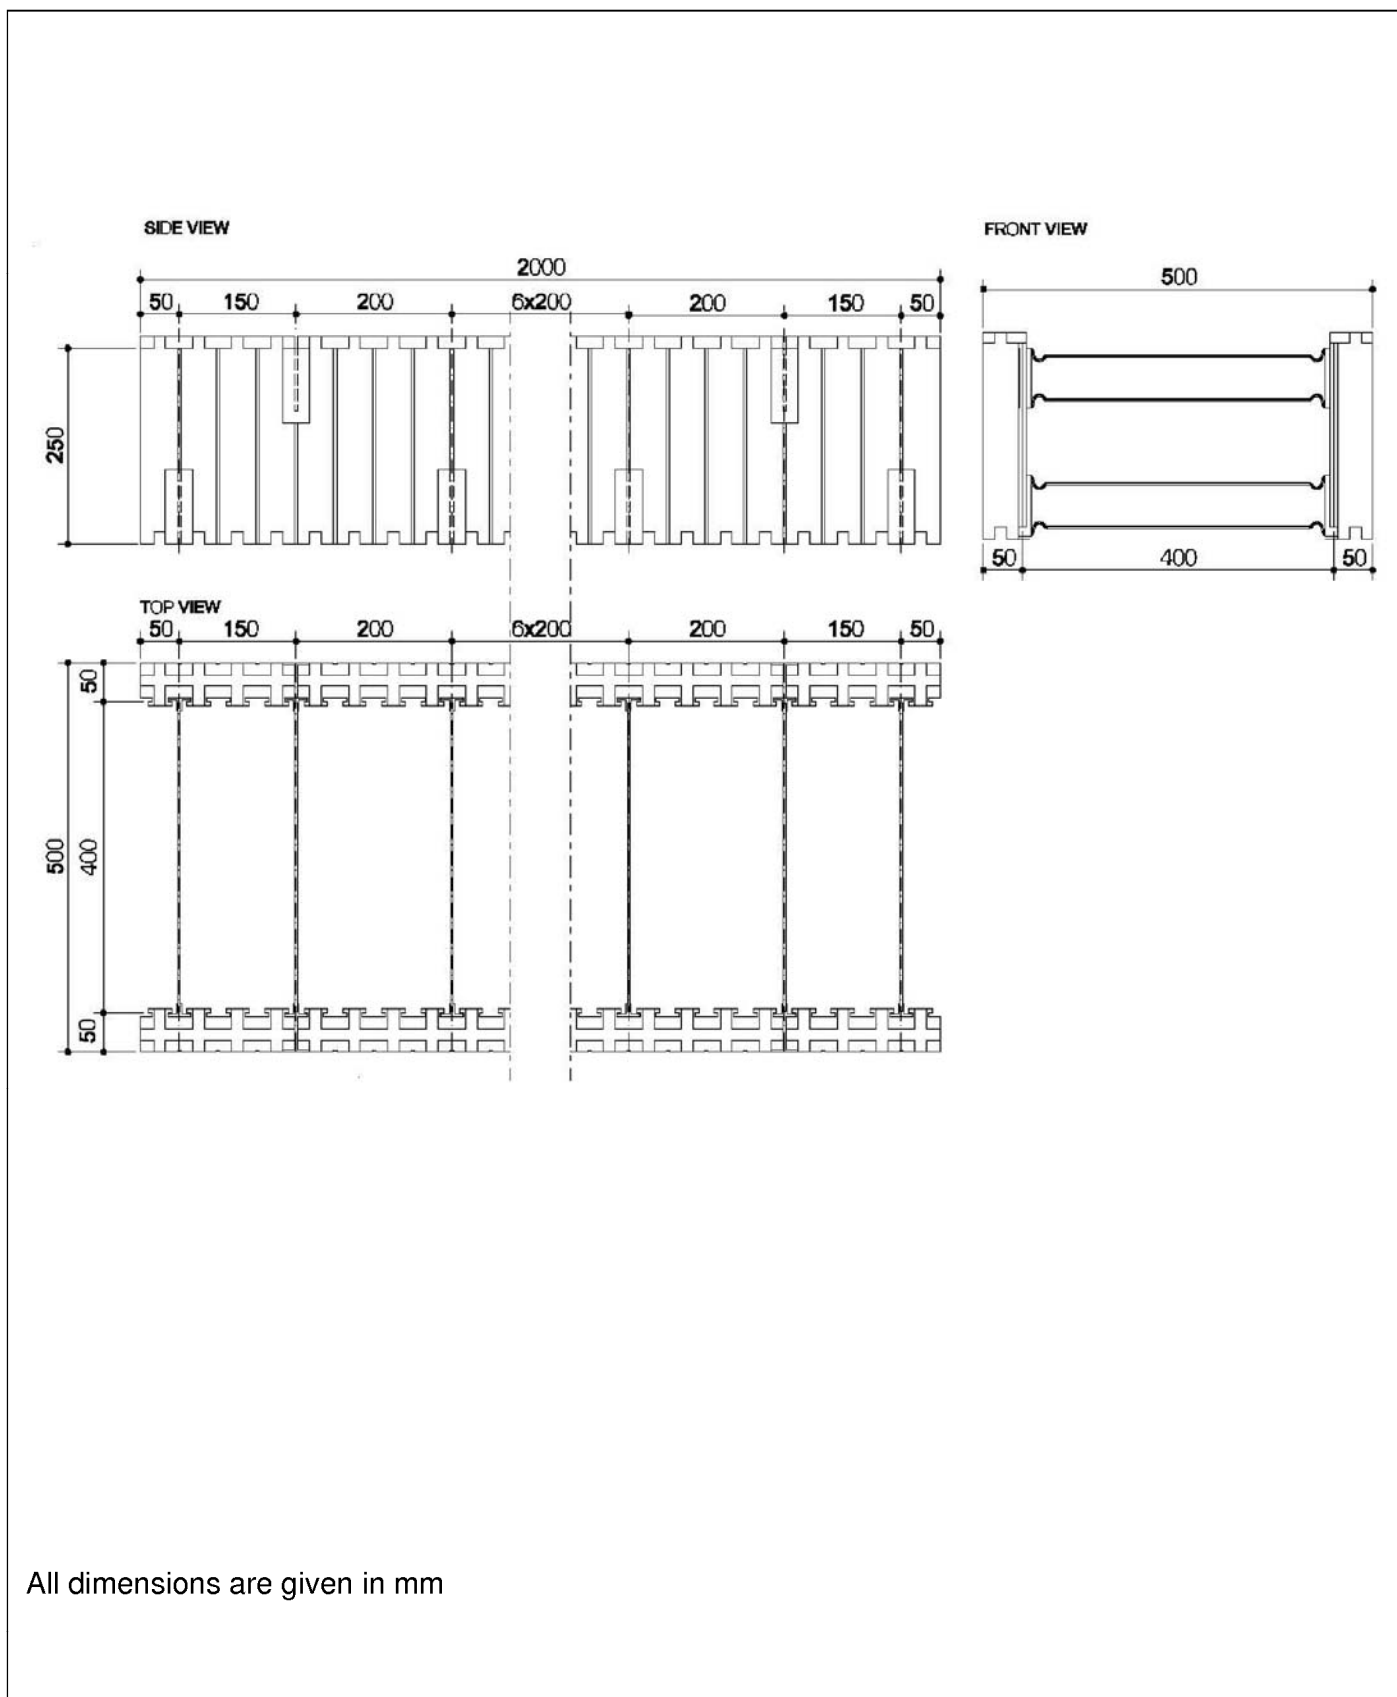


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL SYSTEM (DISMOUNTABLE ELEMENTS)  
Plastic-steel tie block MCFU-St 2/50  
200cm x 50cm x 25cm

Annex A72

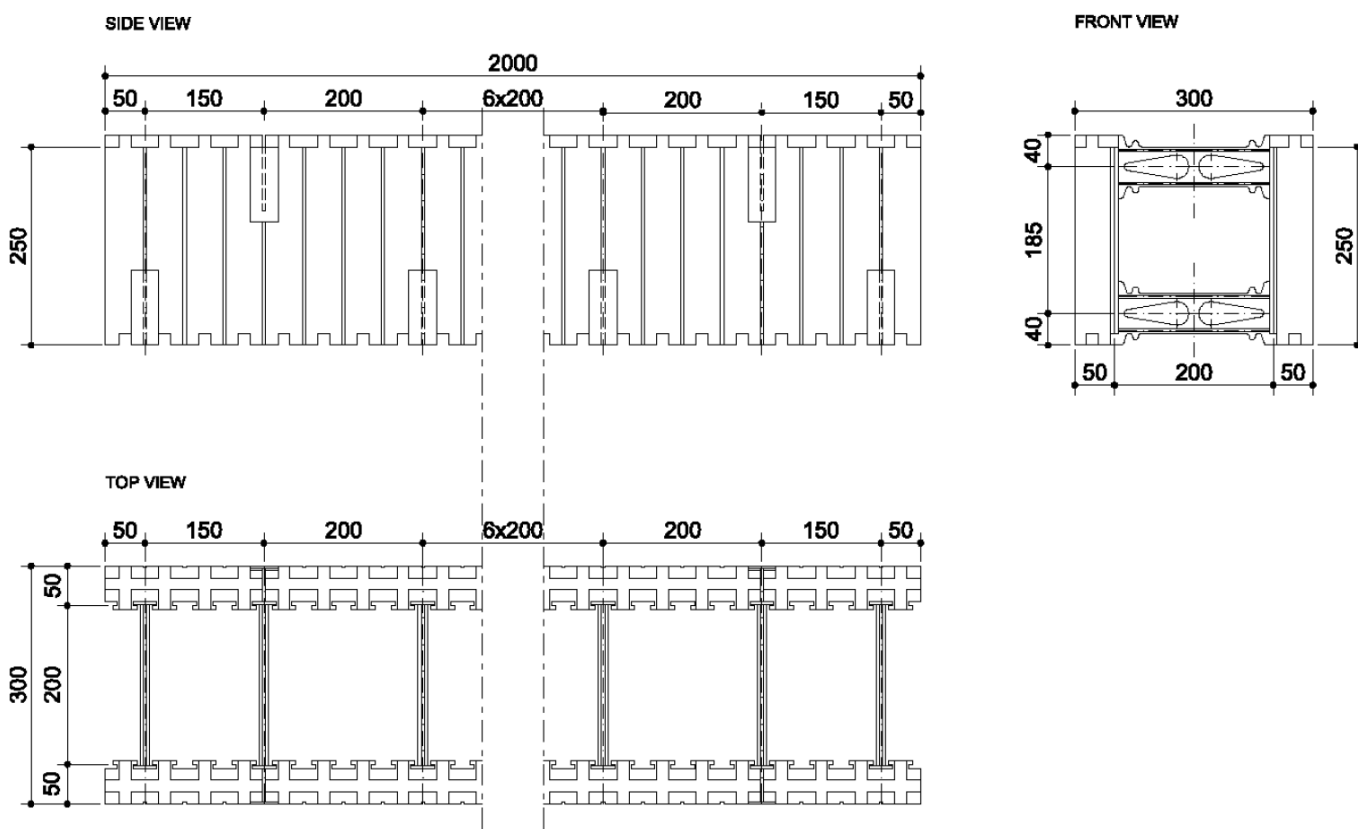


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/30+  
200cm x 25cm x 30cm


Annex A73

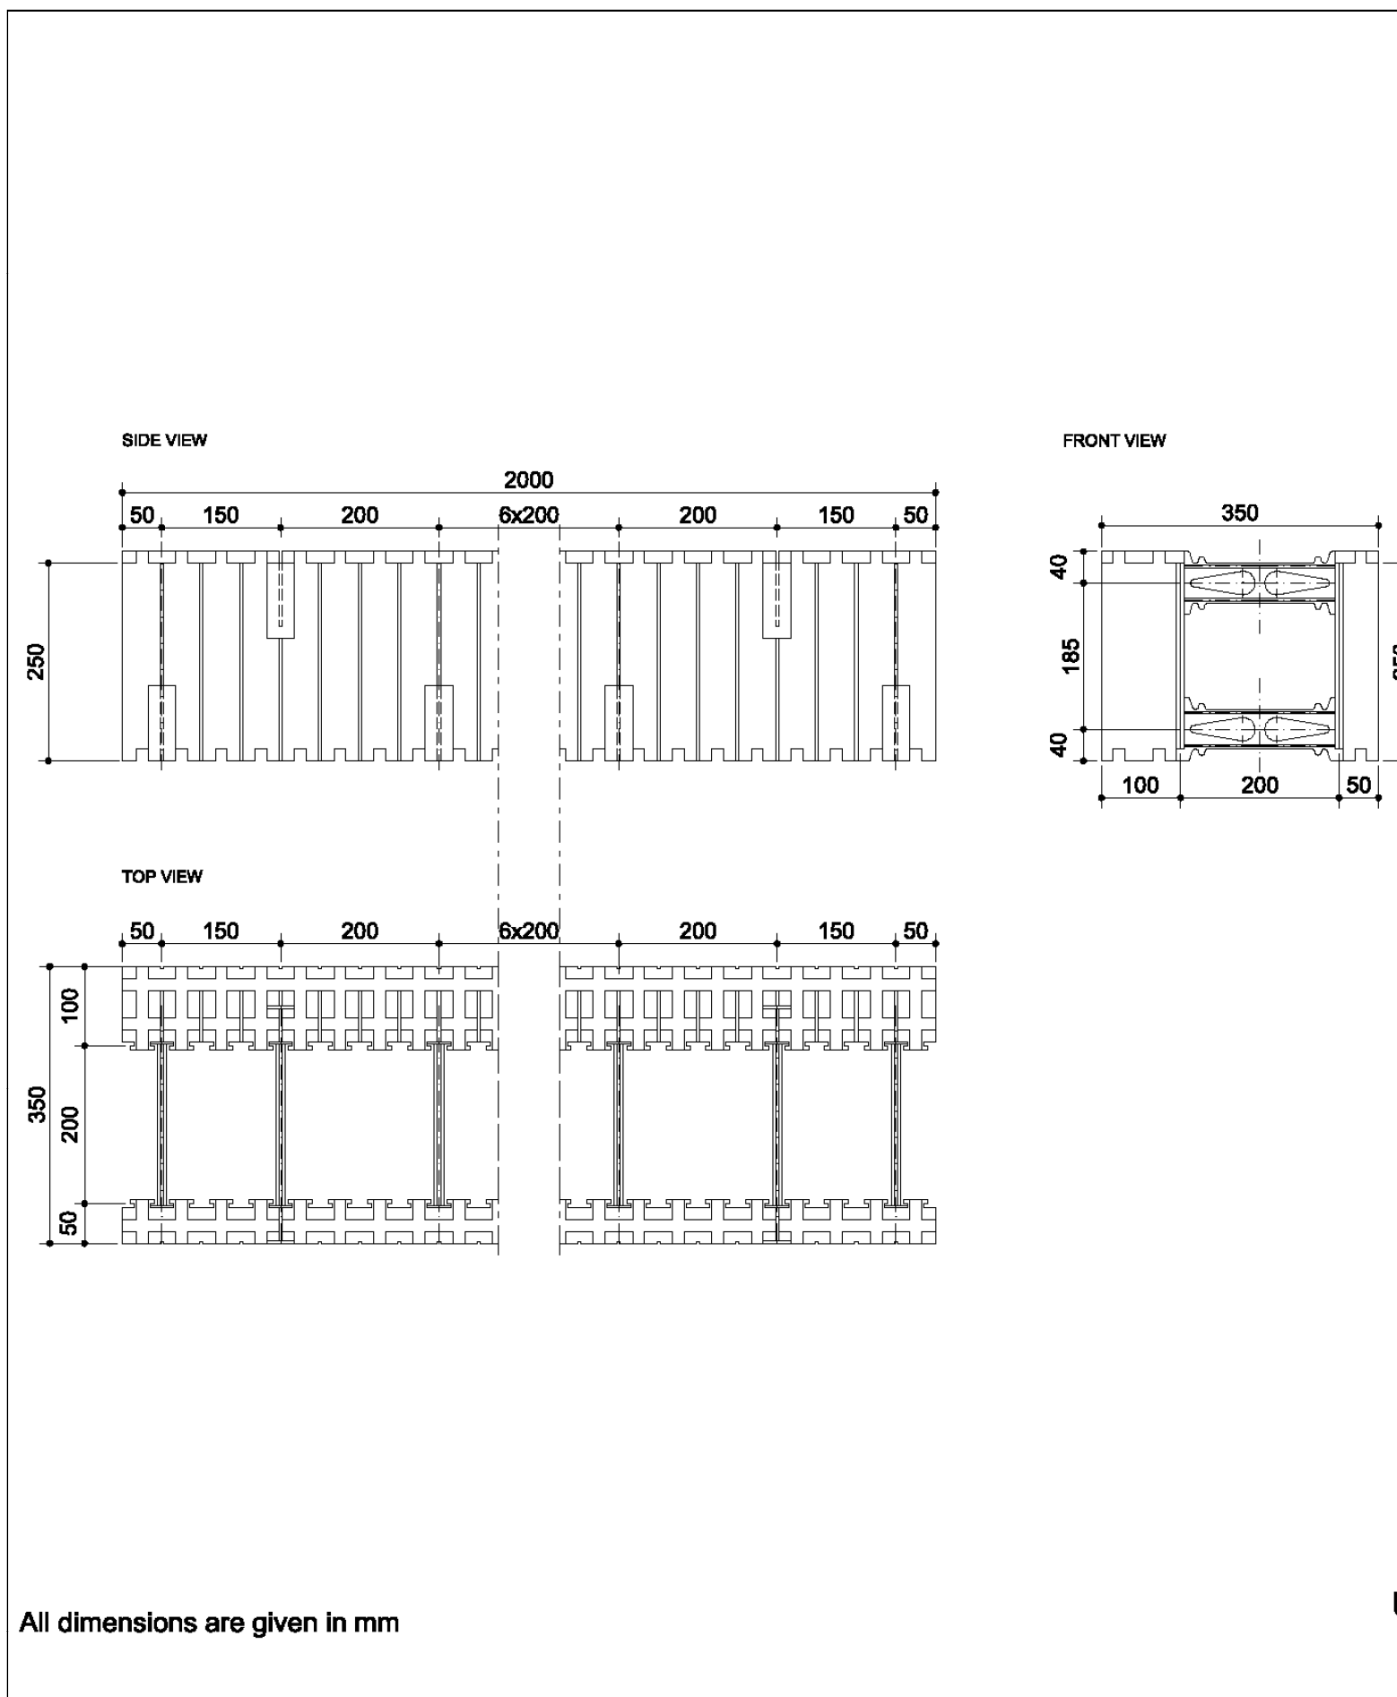

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/35+  
200cm x 25cm x 35cm

Annex A74

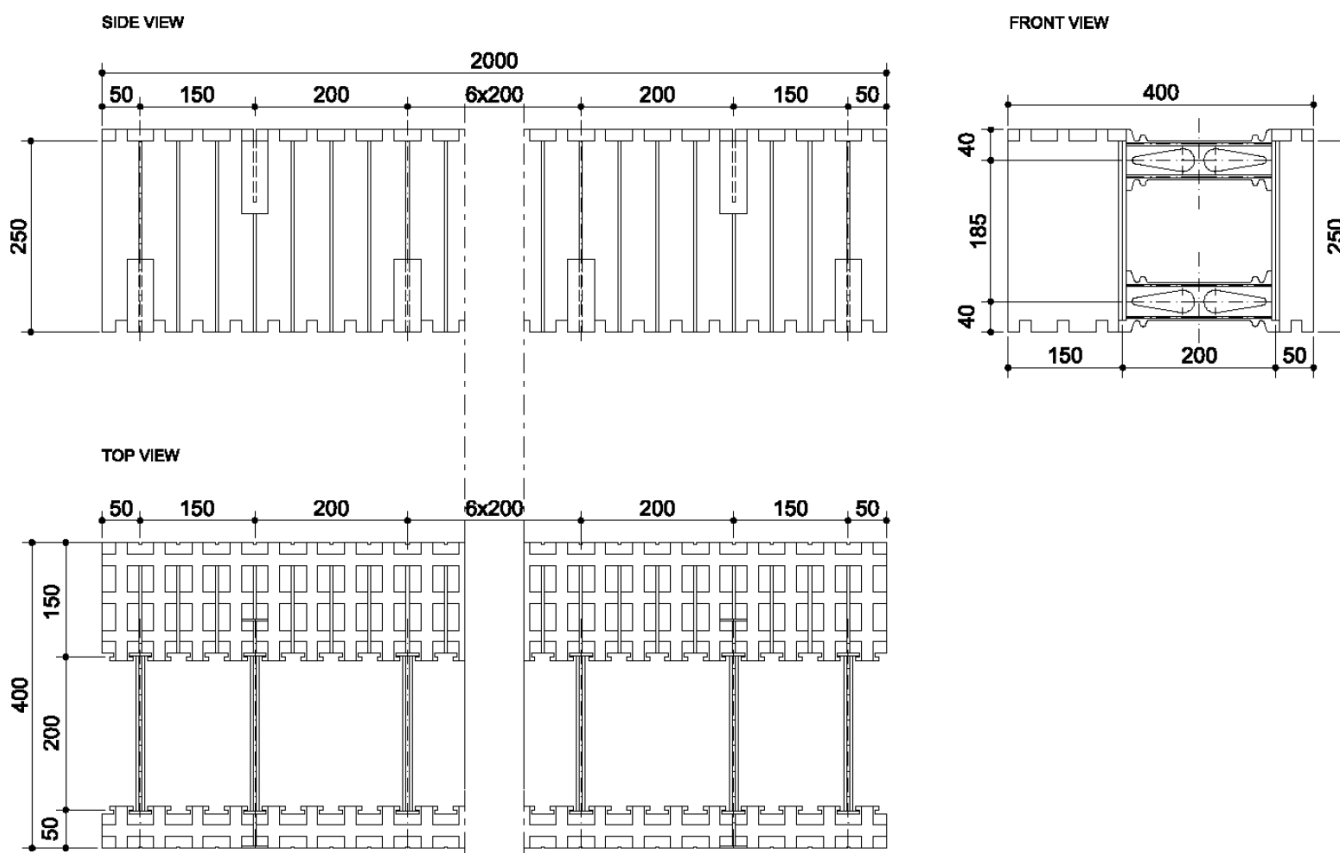


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/40+  
200cm x 25cm x 40cm

Annex A75

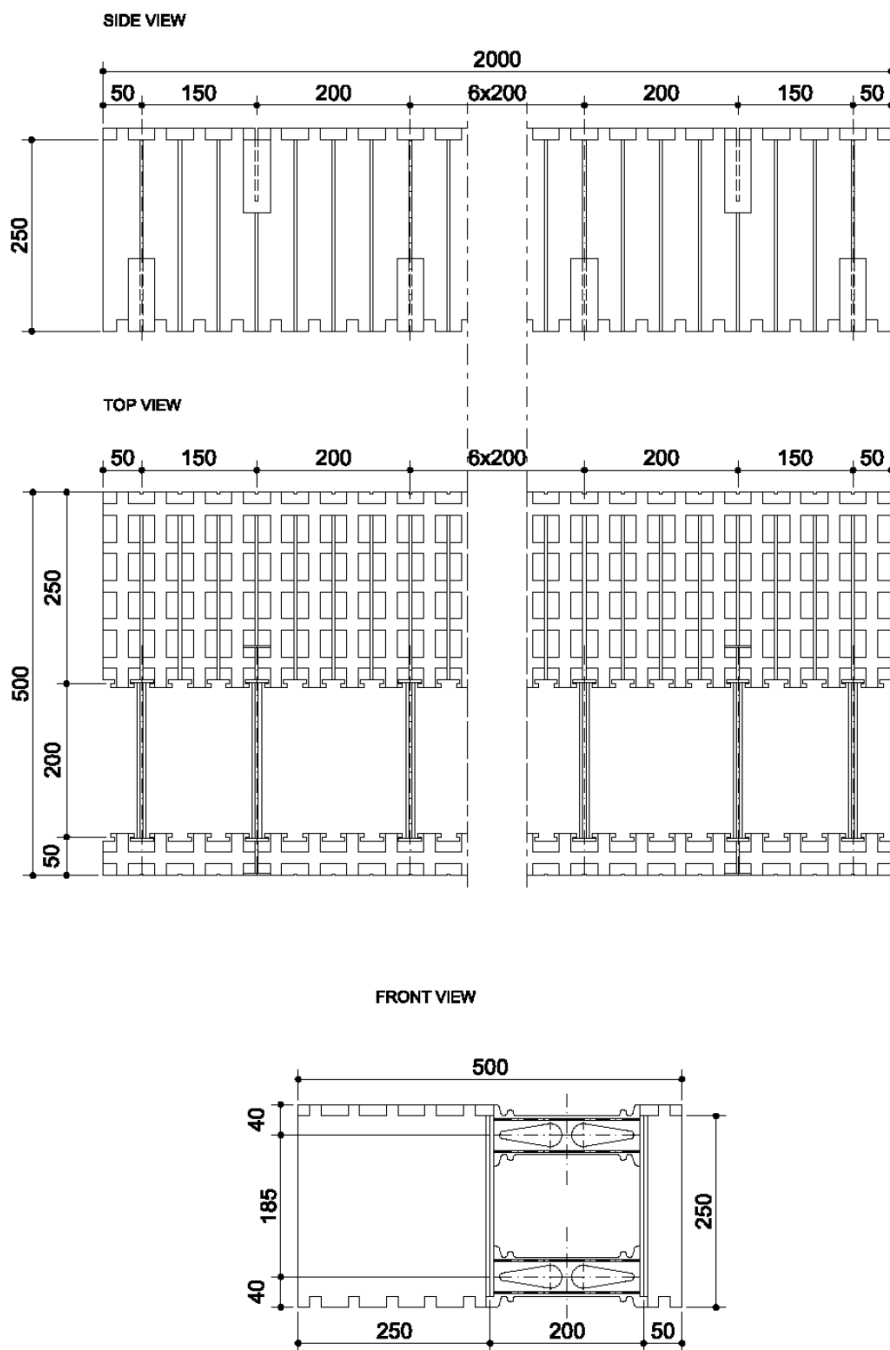


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/50+  
200cm x 25cm x 50cm

Annex A76

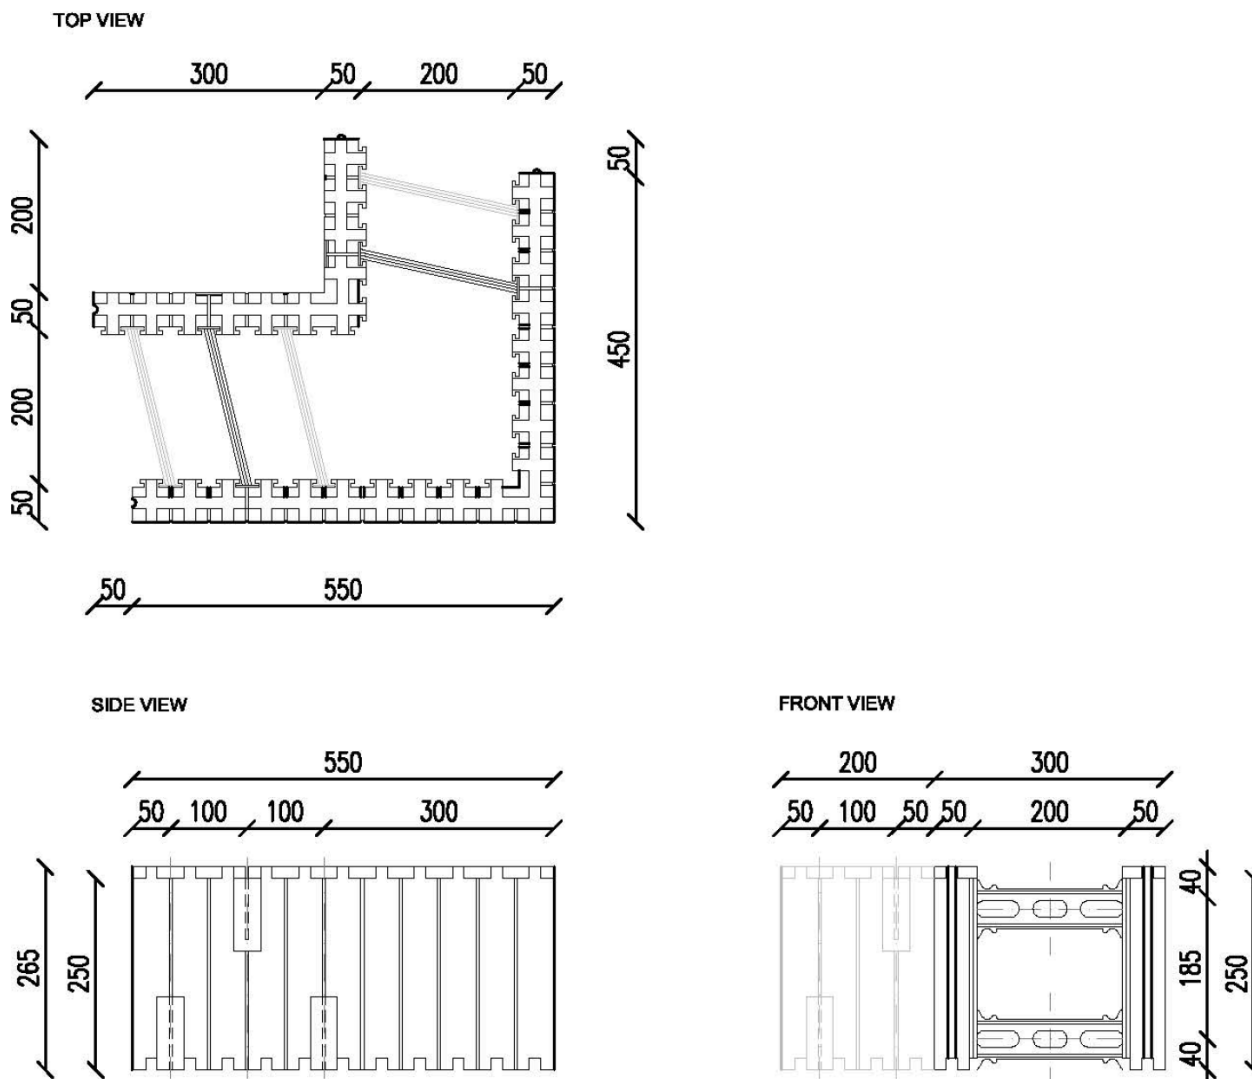


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


UNIVERSAL PLUS SYSTEM {DISMOUNTABLE ELEMENTS}  
90° corner MCFU 30+ E90 RA / LI ETA-07-0117  
100{60}cm x 25cm x 30cm {external right / internal left}

Annex A77


TOP VIEW

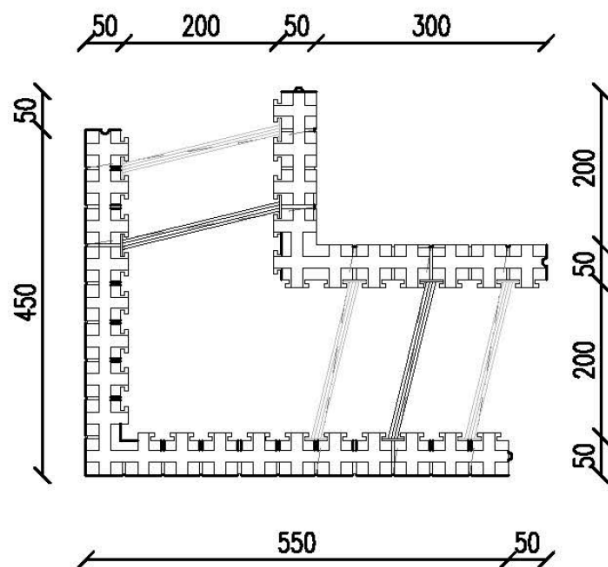

SIDE VIEW

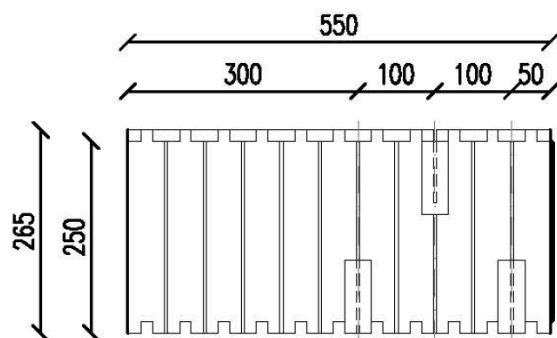

FRONT VIEW

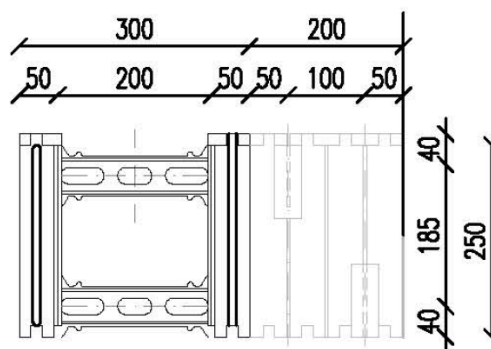


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


UNIVERSAL PLUS SYSTEM {DISMOUNTABLE ELEMENTS}  
90° corner MCFU 30+ E90 LA / RI  
100(60)cm x 25cm x 30cm {external left / internal right}

Annex A78


TOP VIEW

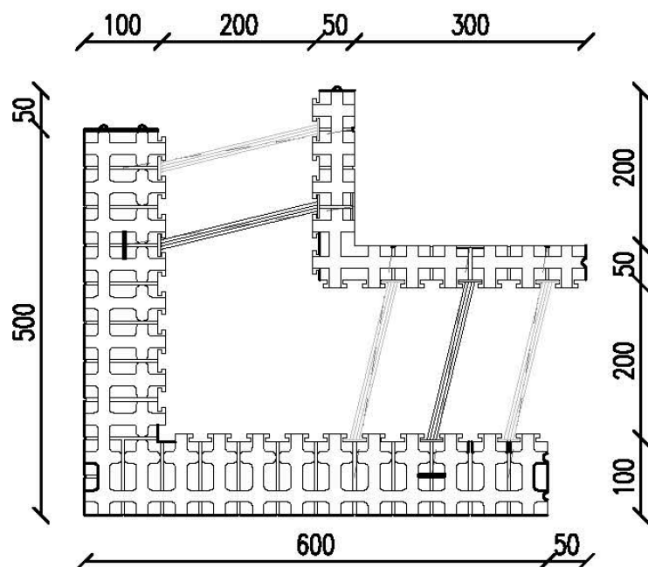

SIDE VIEW

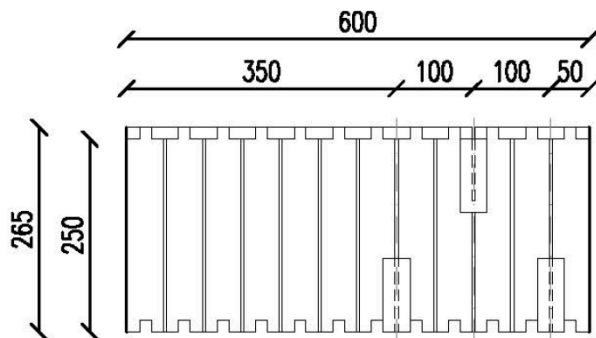

FRONT VIEW

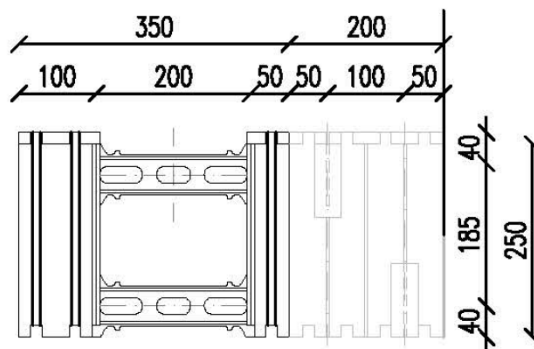


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM {DISMOUNTABLE ELEMENTS}  
90° corner {external /left} MCFU35+ E90 LA  
110cm x 35cm x 25cm

Annex A79

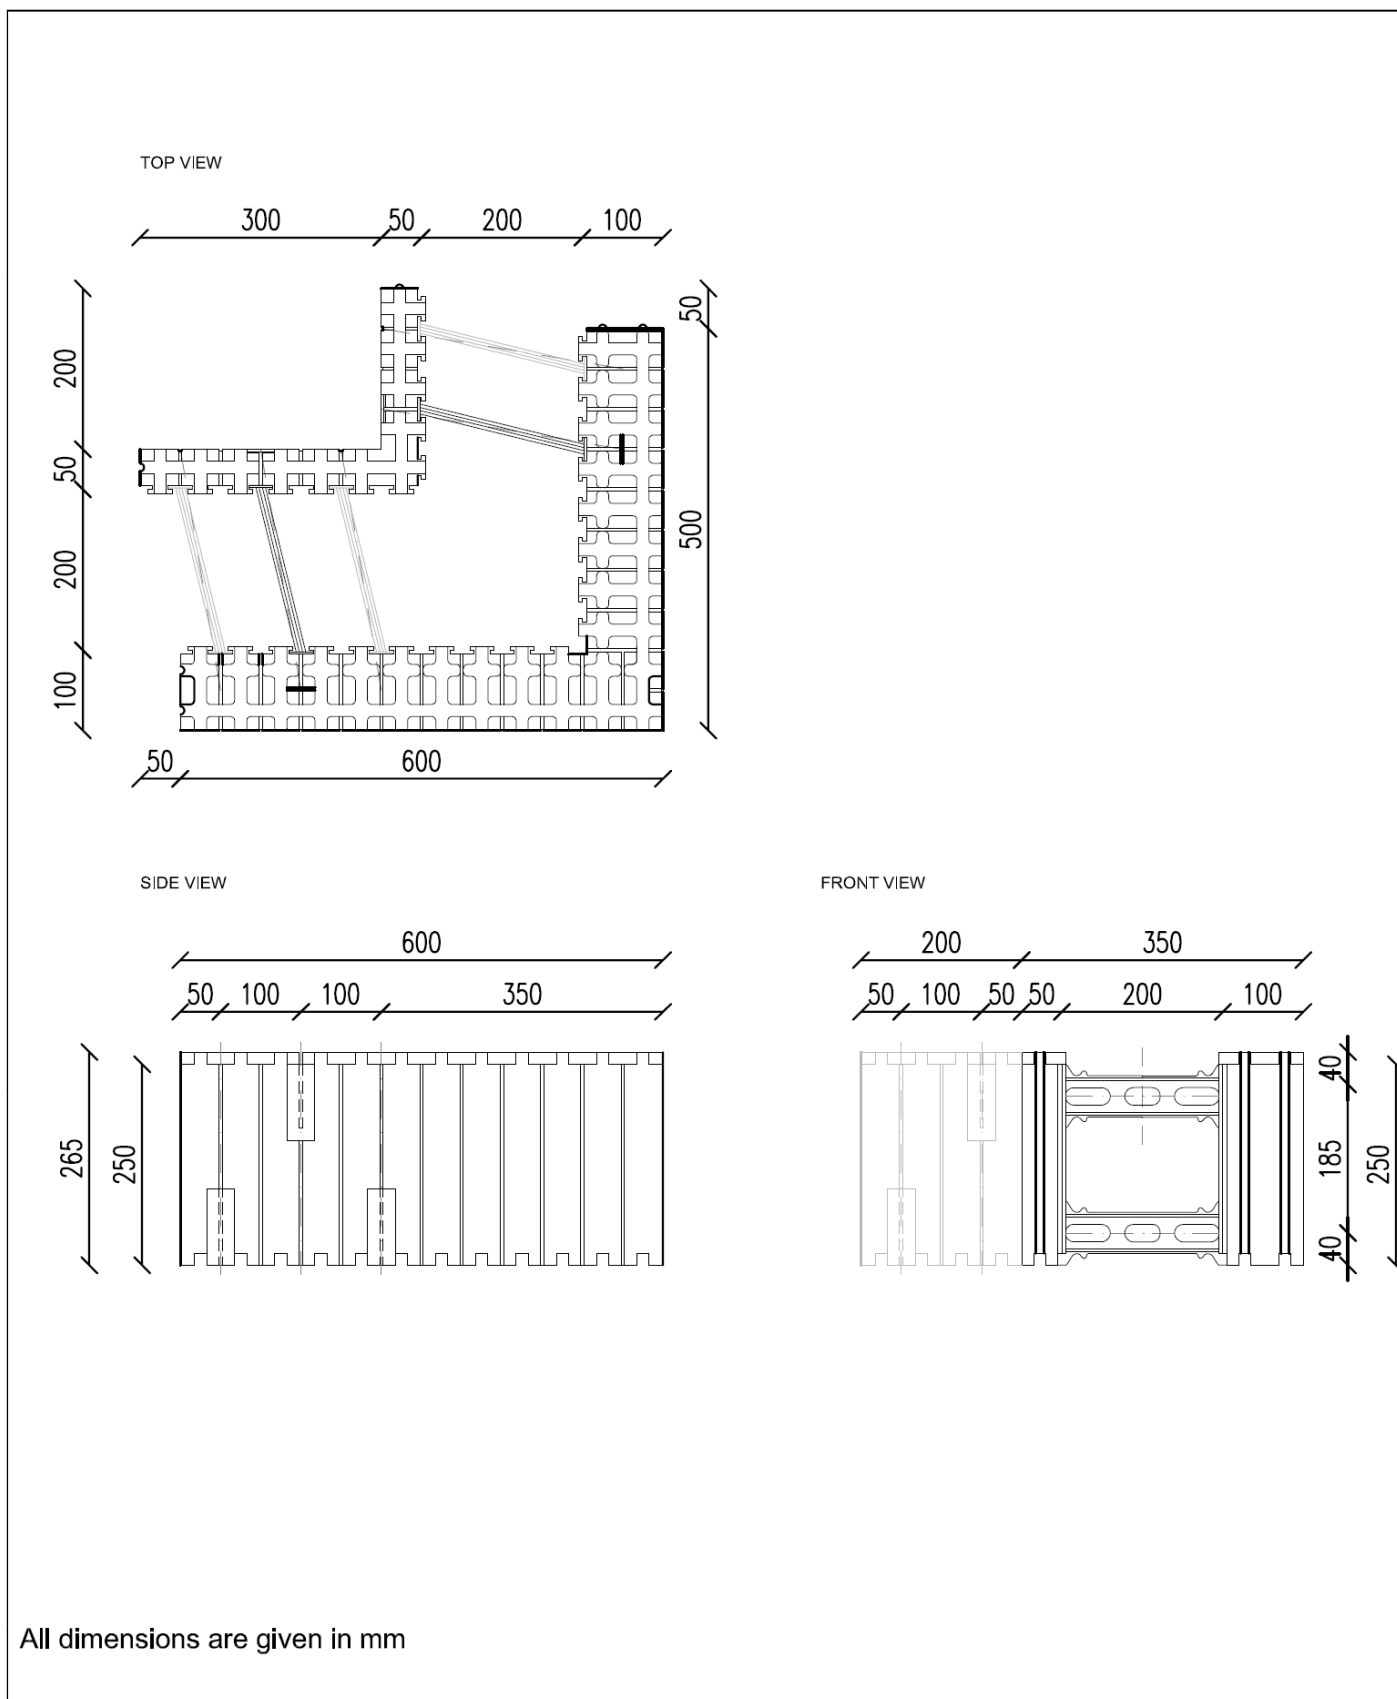


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM {DISMOUNTABLE ELEMENTS)  
90° comer (external / right) MCFU35+ E90 RA  
110cm x 35cm x 25cm

Annex A80

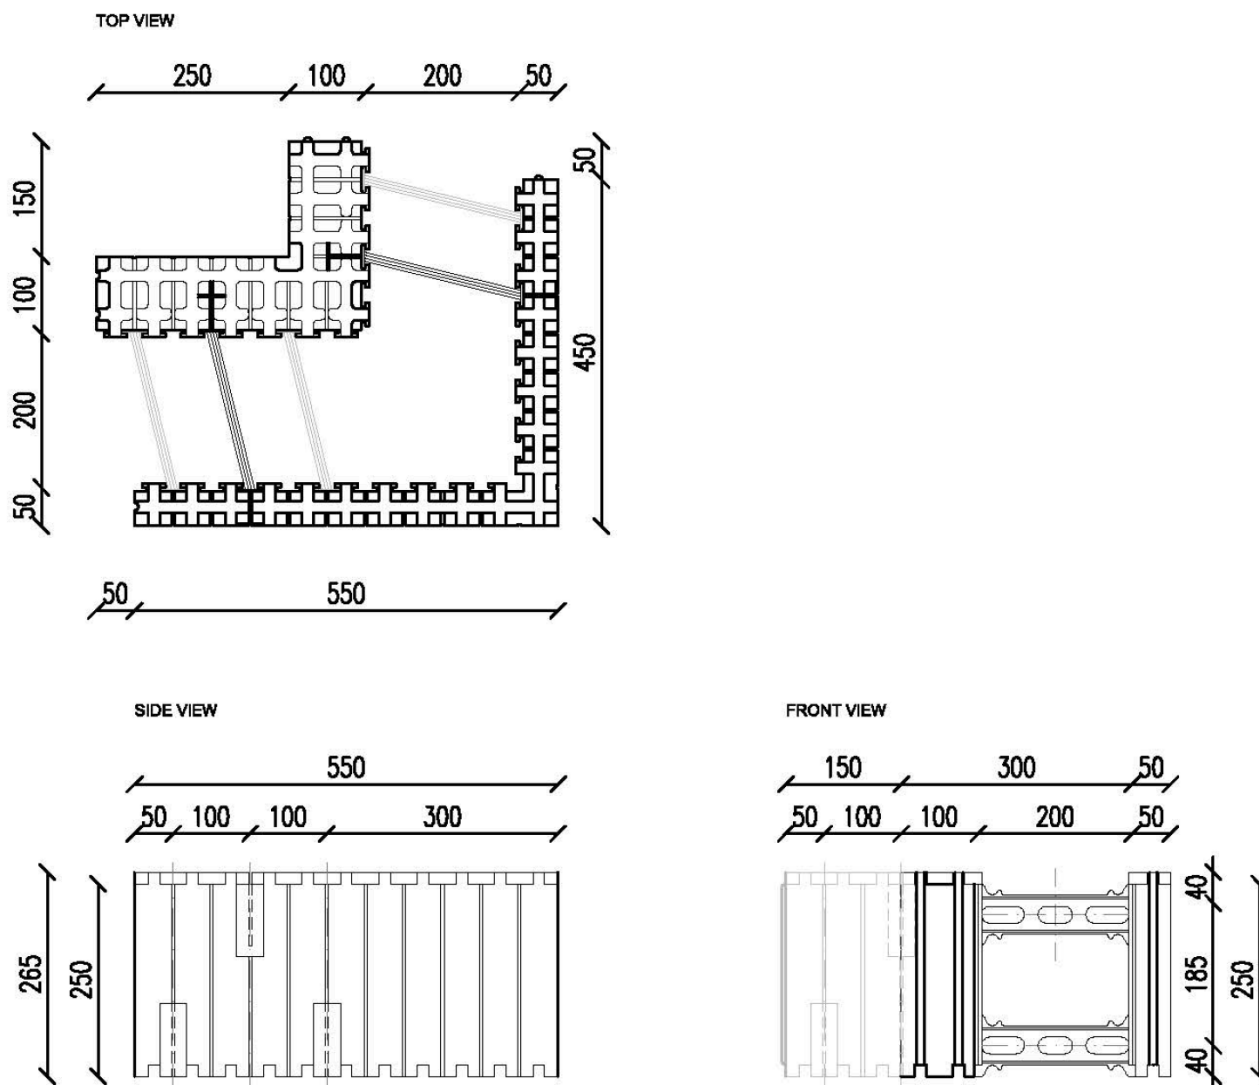


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° corner (internal / right) MCFU 35+ E90 RI  
40cm x 35cm x 25cm

Annex A81



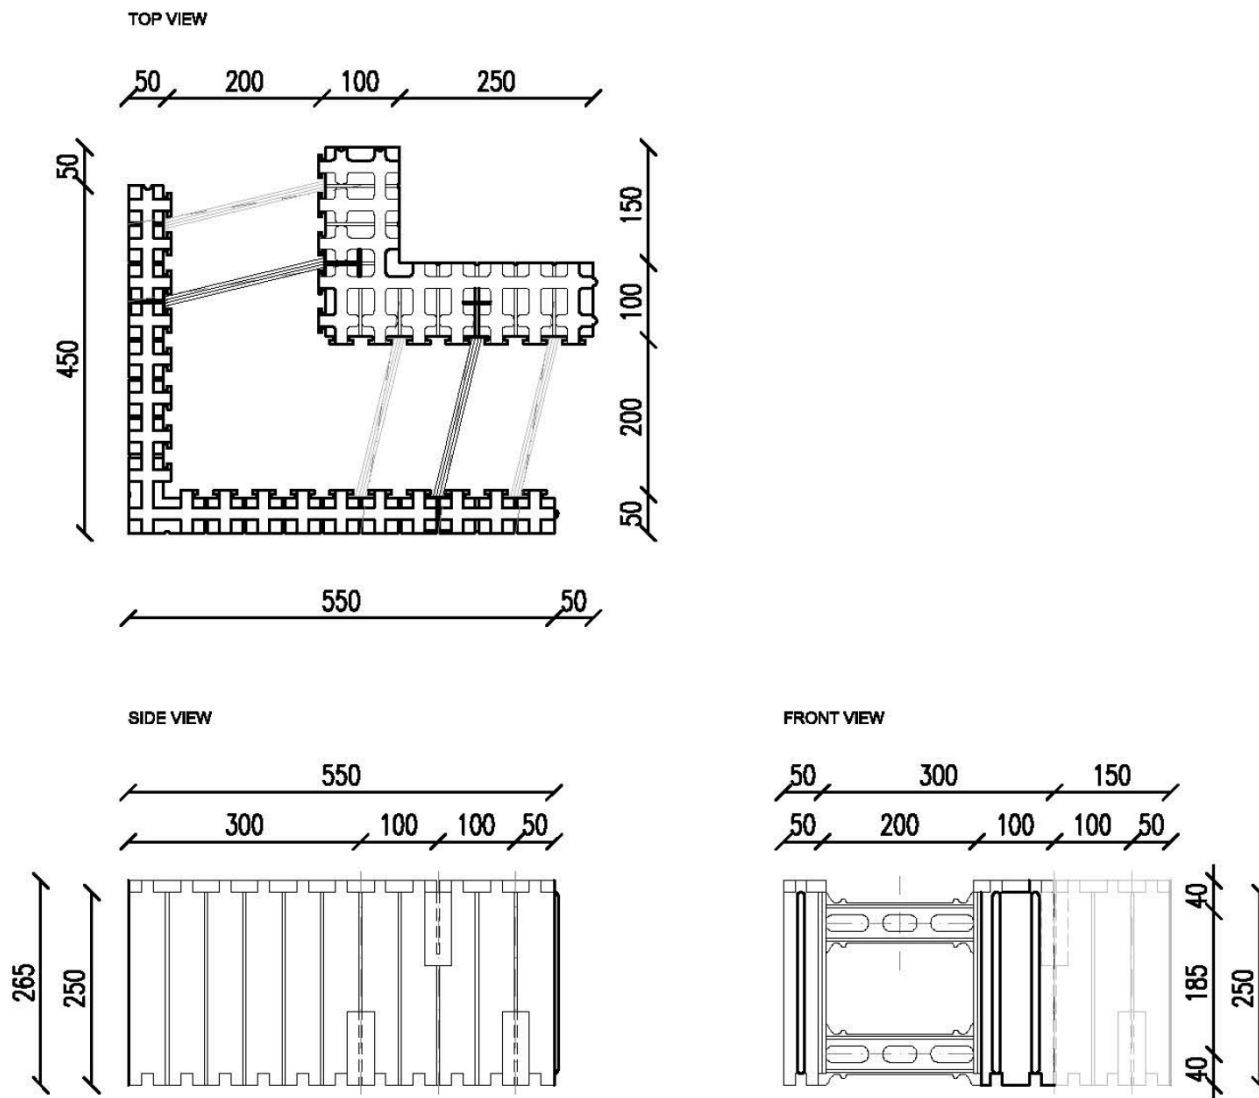


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° corner (internal / left) MCFU35+ E90 LI  
40cm x 35cm x 25cm

Annex A82

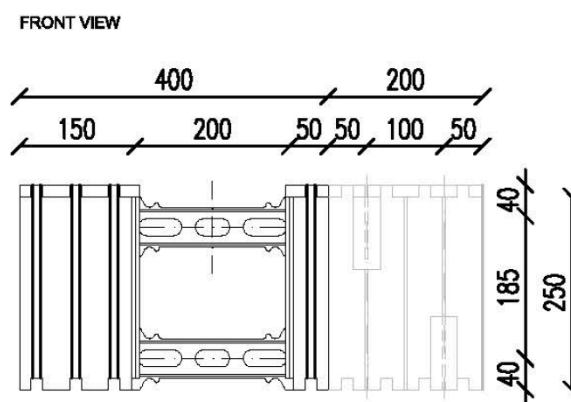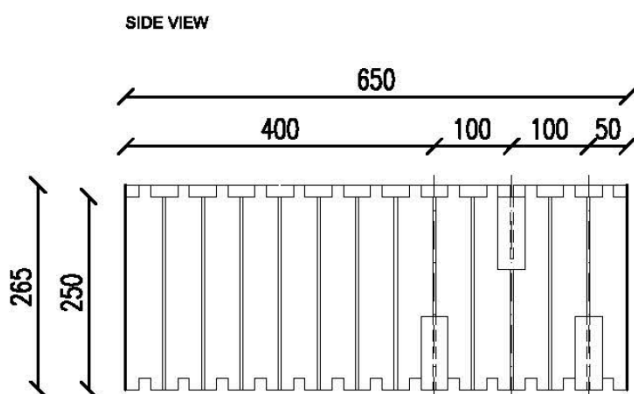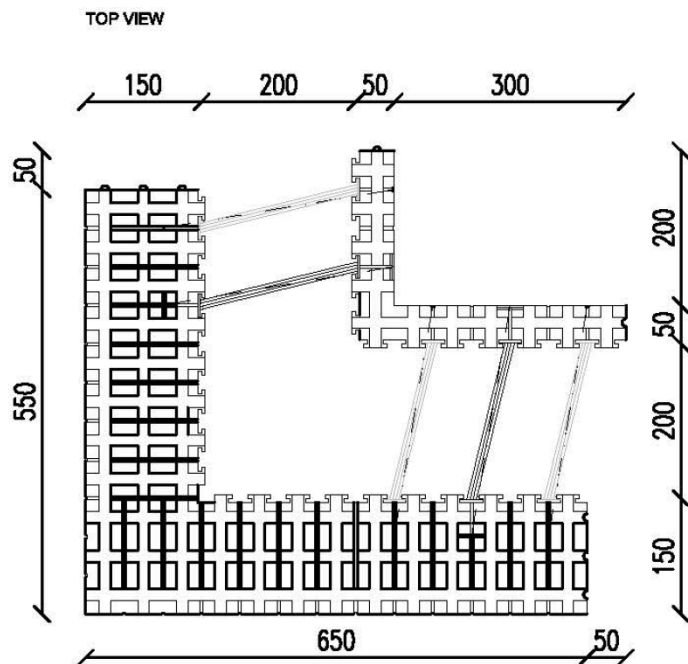


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° corner (external / left) MCFU40+ E90 LA  
120cm x 40cm x 25cm

Annex A83



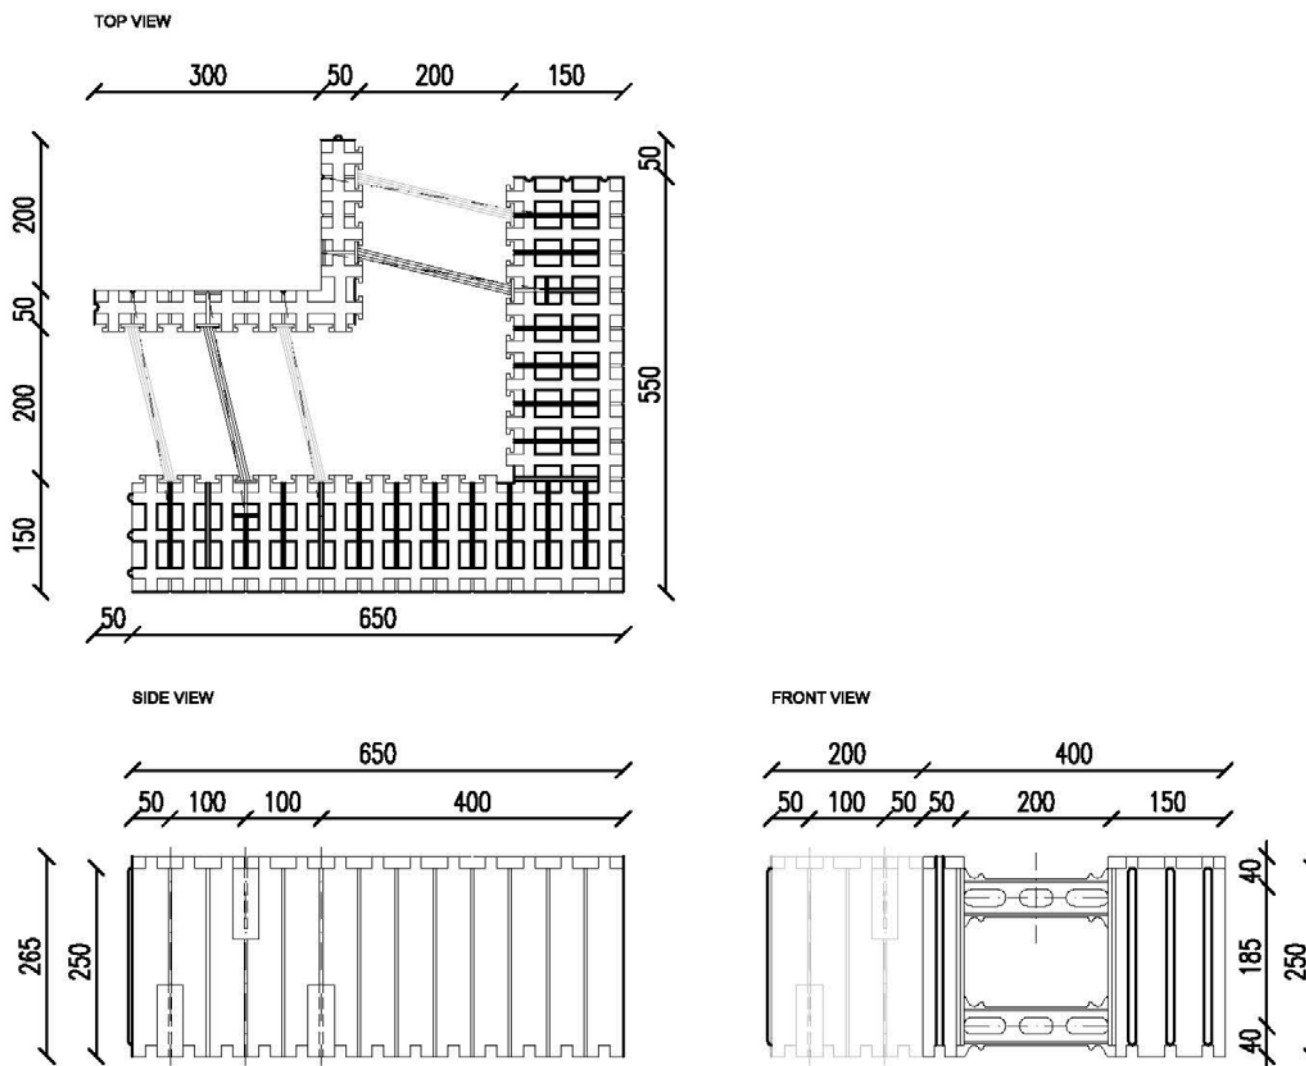


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° comer (external / right) MCFU40+ E90 RA  
120cm x 40cm x 25cm

Annex A84

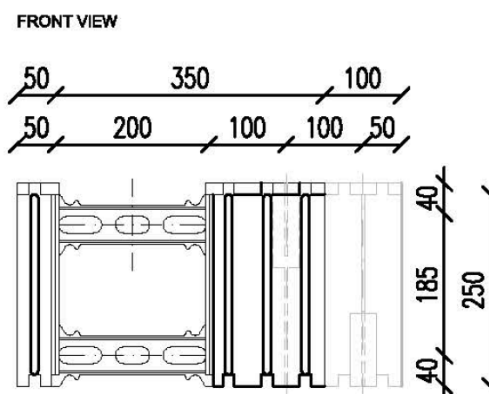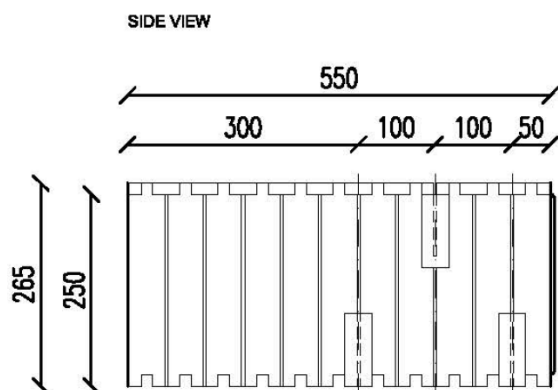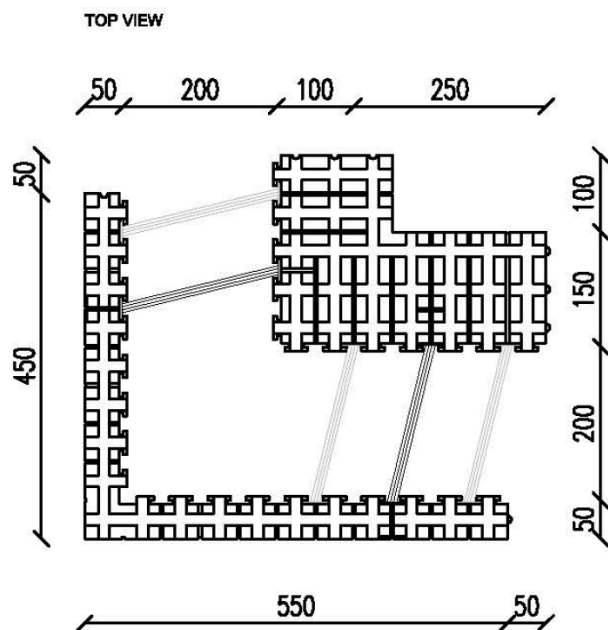


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° corner (internal / left) MCFU 40+ E90 LI  
30cm x 40cm x 25cm

Annex A85

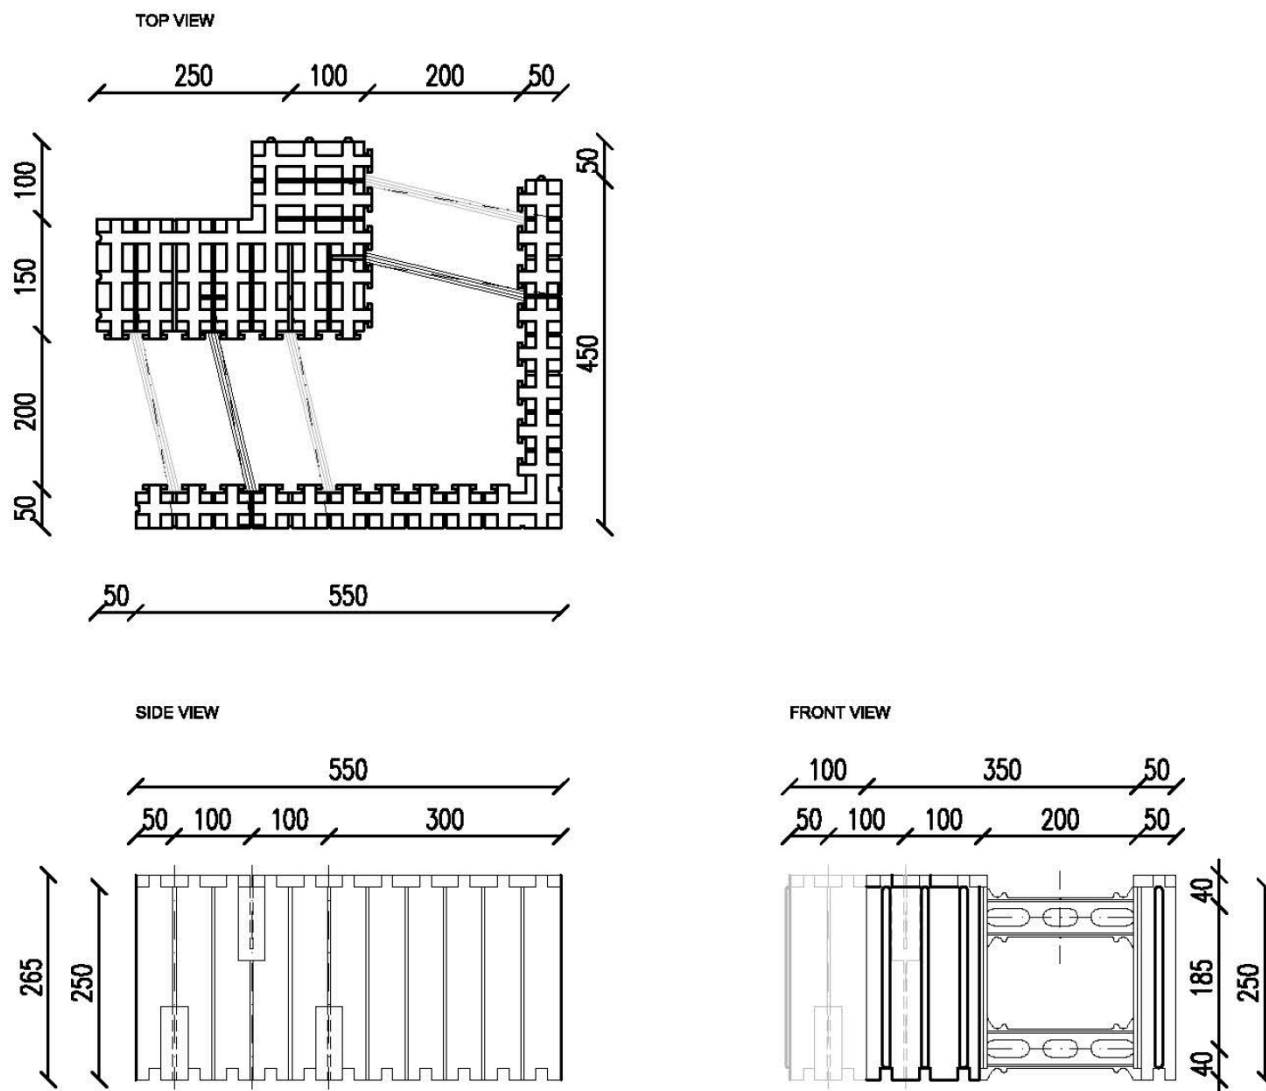


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° corner (internal / right) MCFU 40+ E90 RI  
30cm x 40cm x 25cm

Annex A86

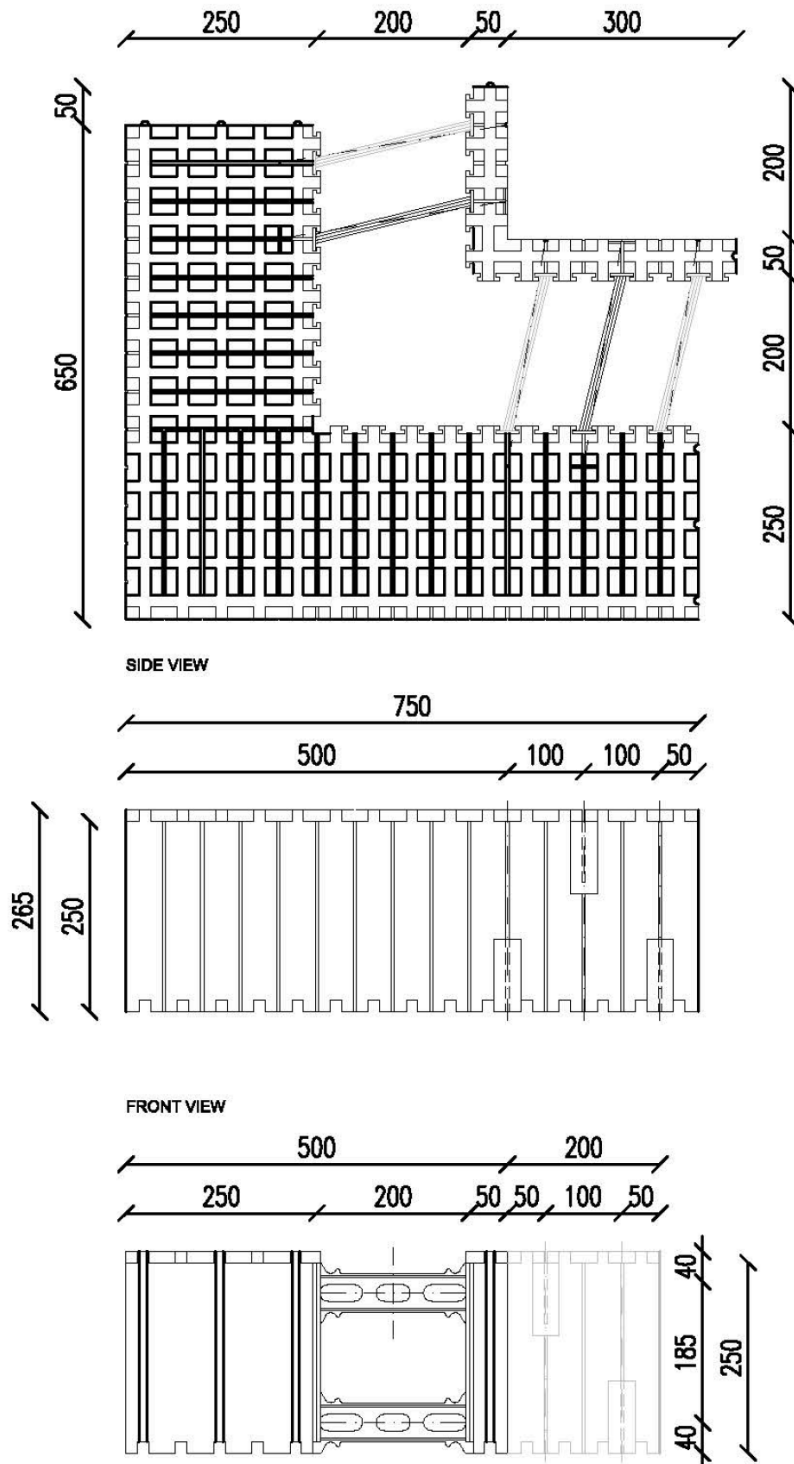


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
 90° corner (external / left) MCFU 50+ E90 LA  
 140cm x 25cm x 50cm

Annex A87

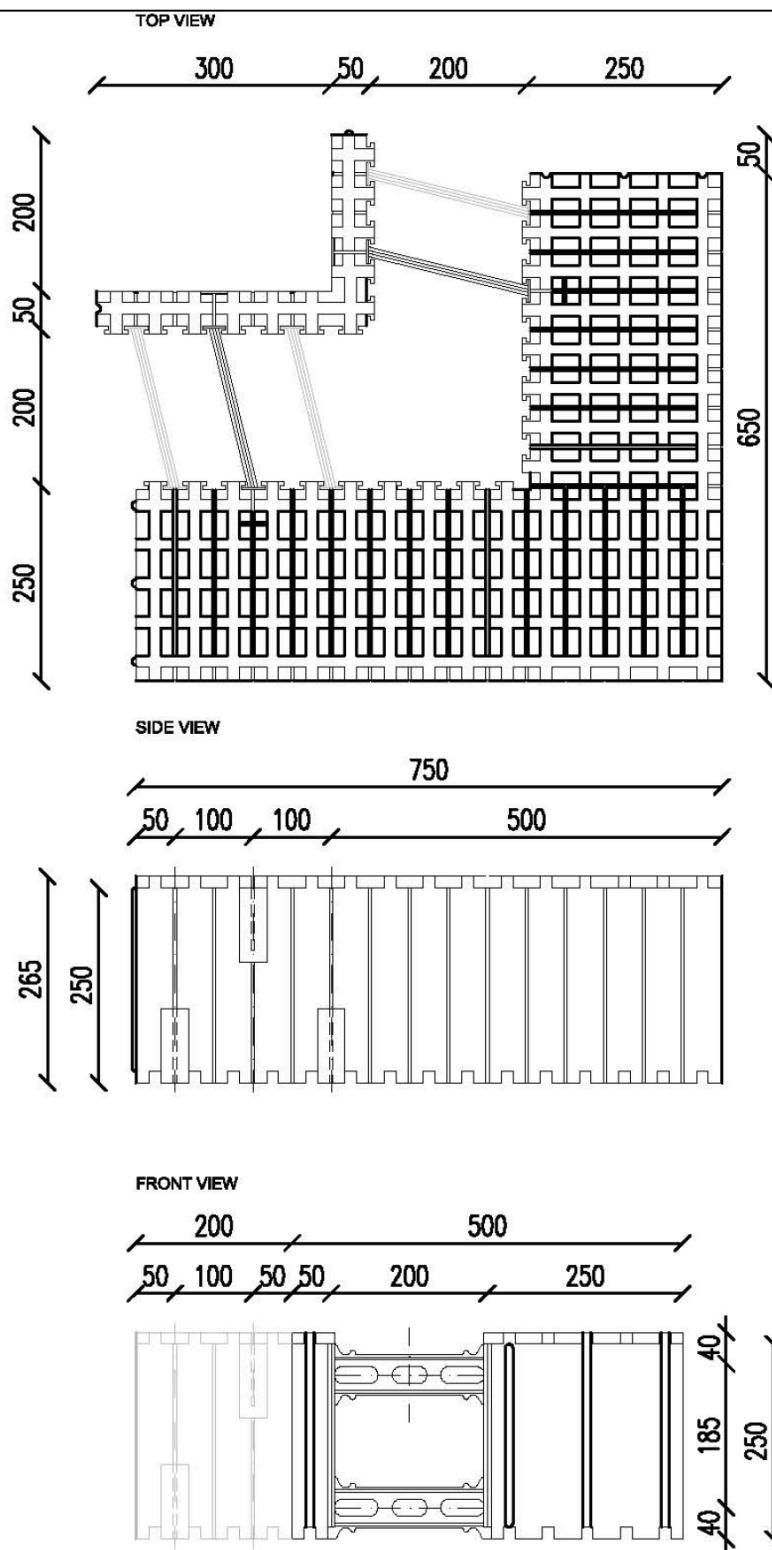


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° corner (external / right) MCFU 50+ E90 RA  
140cm x 25cm x 50cm

Annex A88

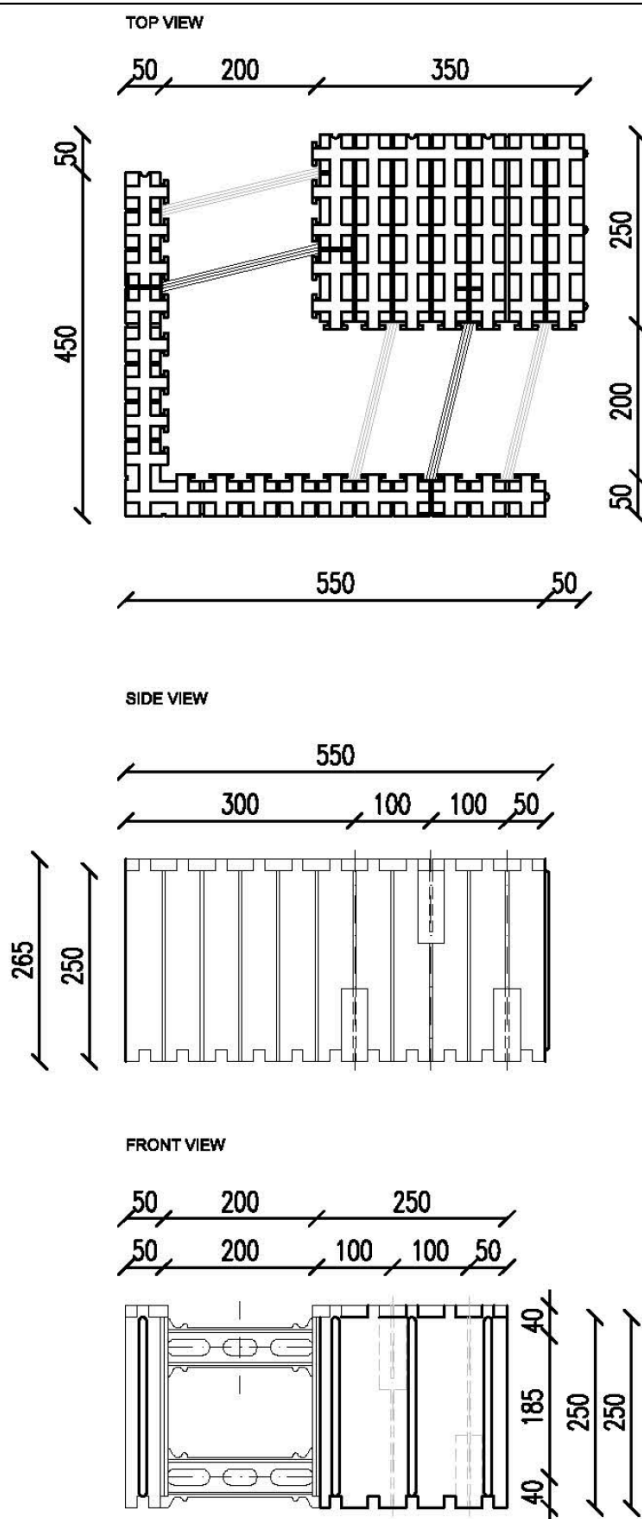


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM {DISMOUNTABLE ELEMENTS)  
90° corner {internal / left) MCFU 50+ E90 LI  
35cm x 25cm x 50cm

Annex A89

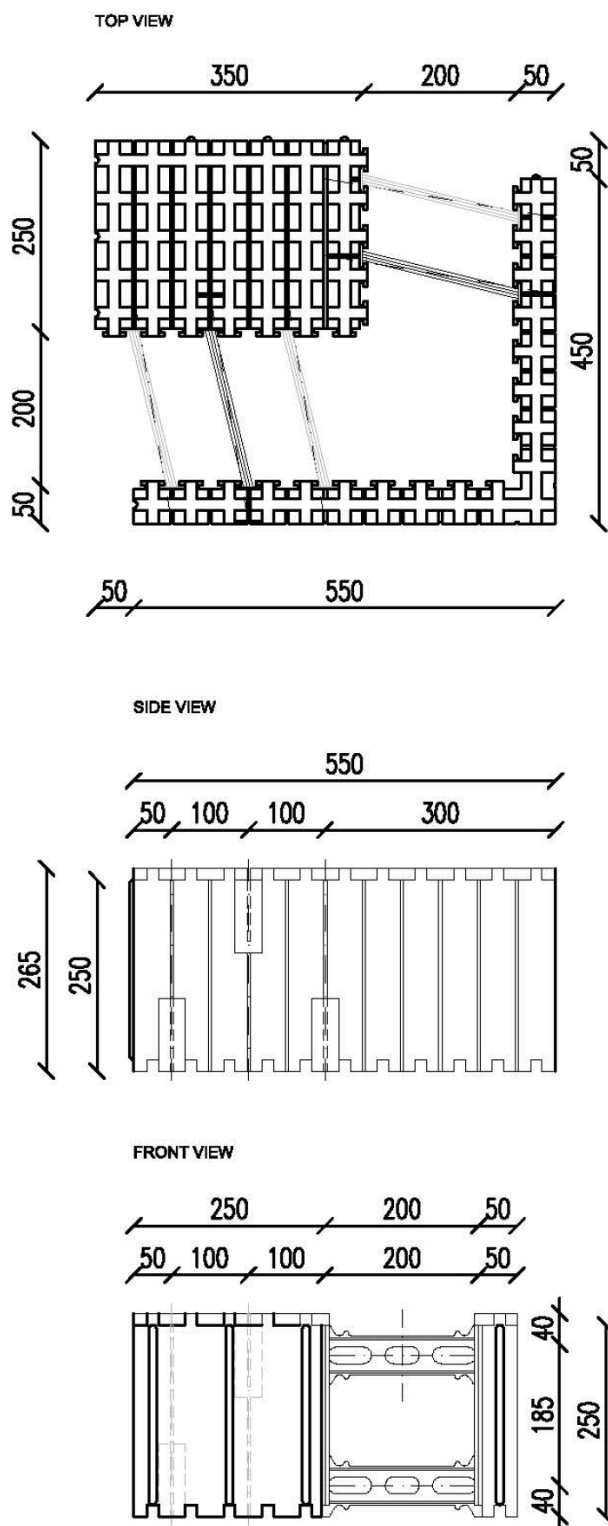


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
90° corner (internal / right) MCFU 50+ E90 RI  
35cm x 25cm x 50cm

Annex A90

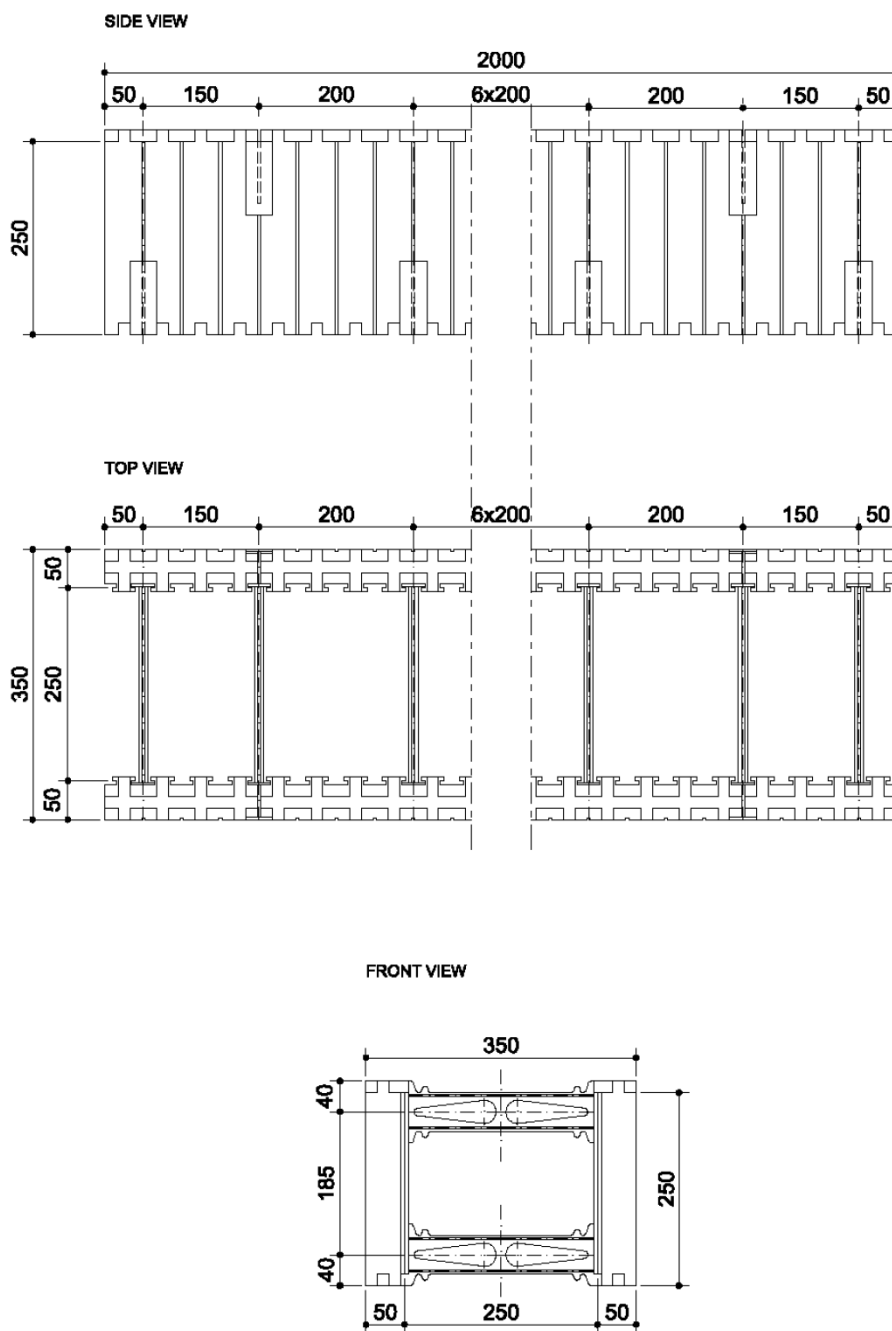


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/35++  
200cm x 25cm x 35cm

Annex A91

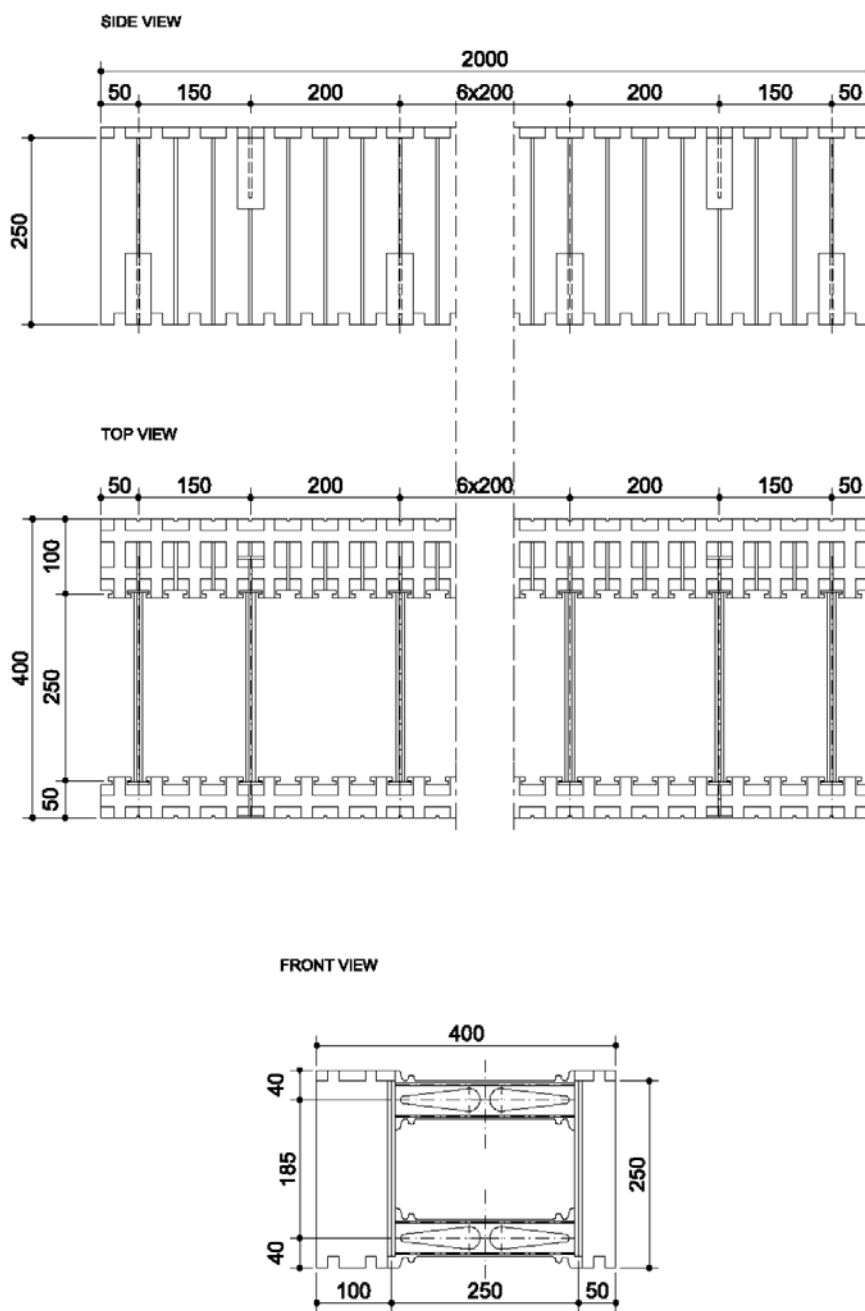


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/40++  
200cm x 25cm x 40cm

Annex A92

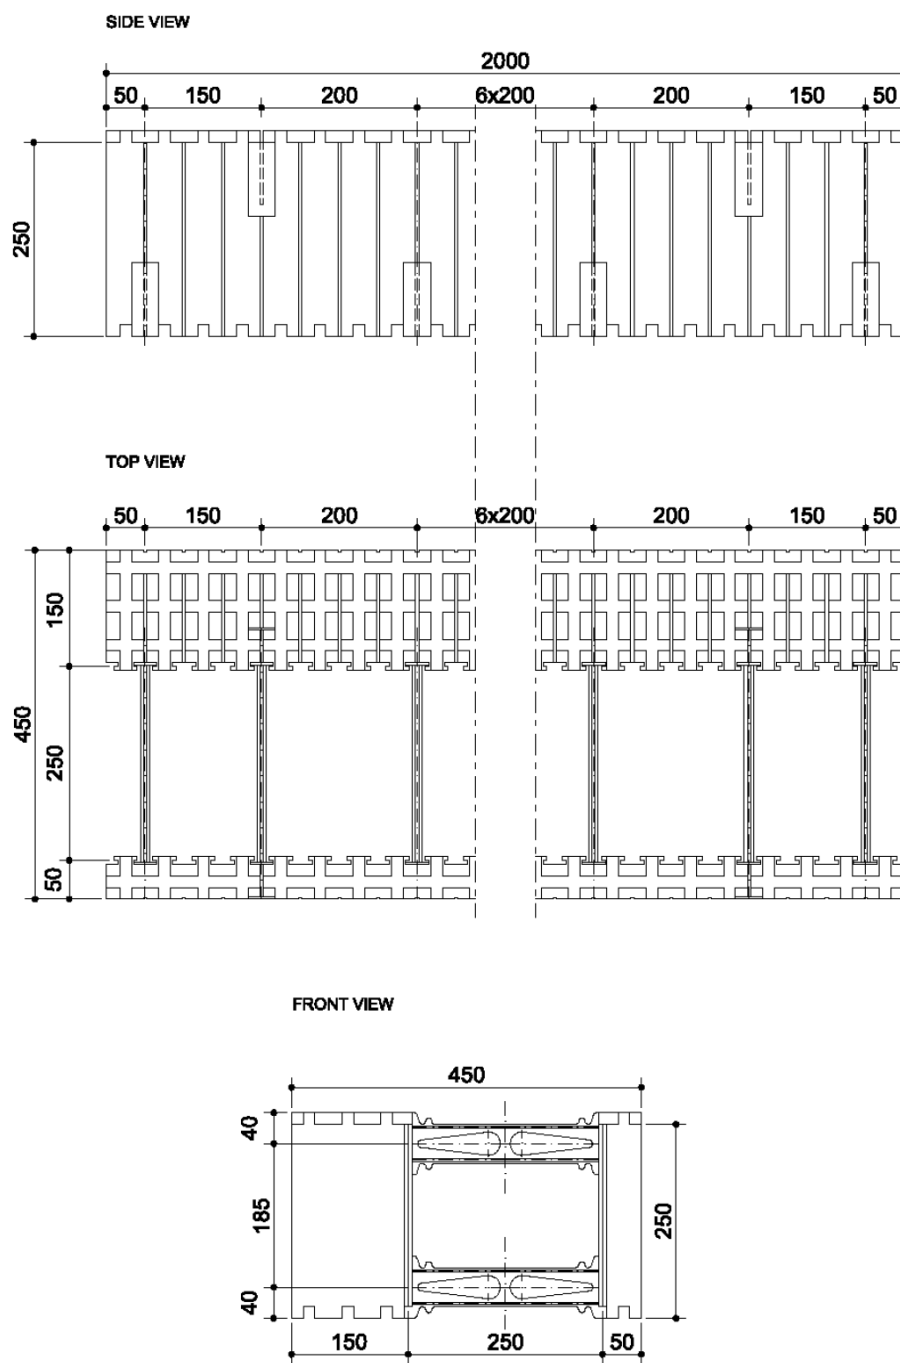


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/45++  
200cm x 25cm x 45cm

Annex A93

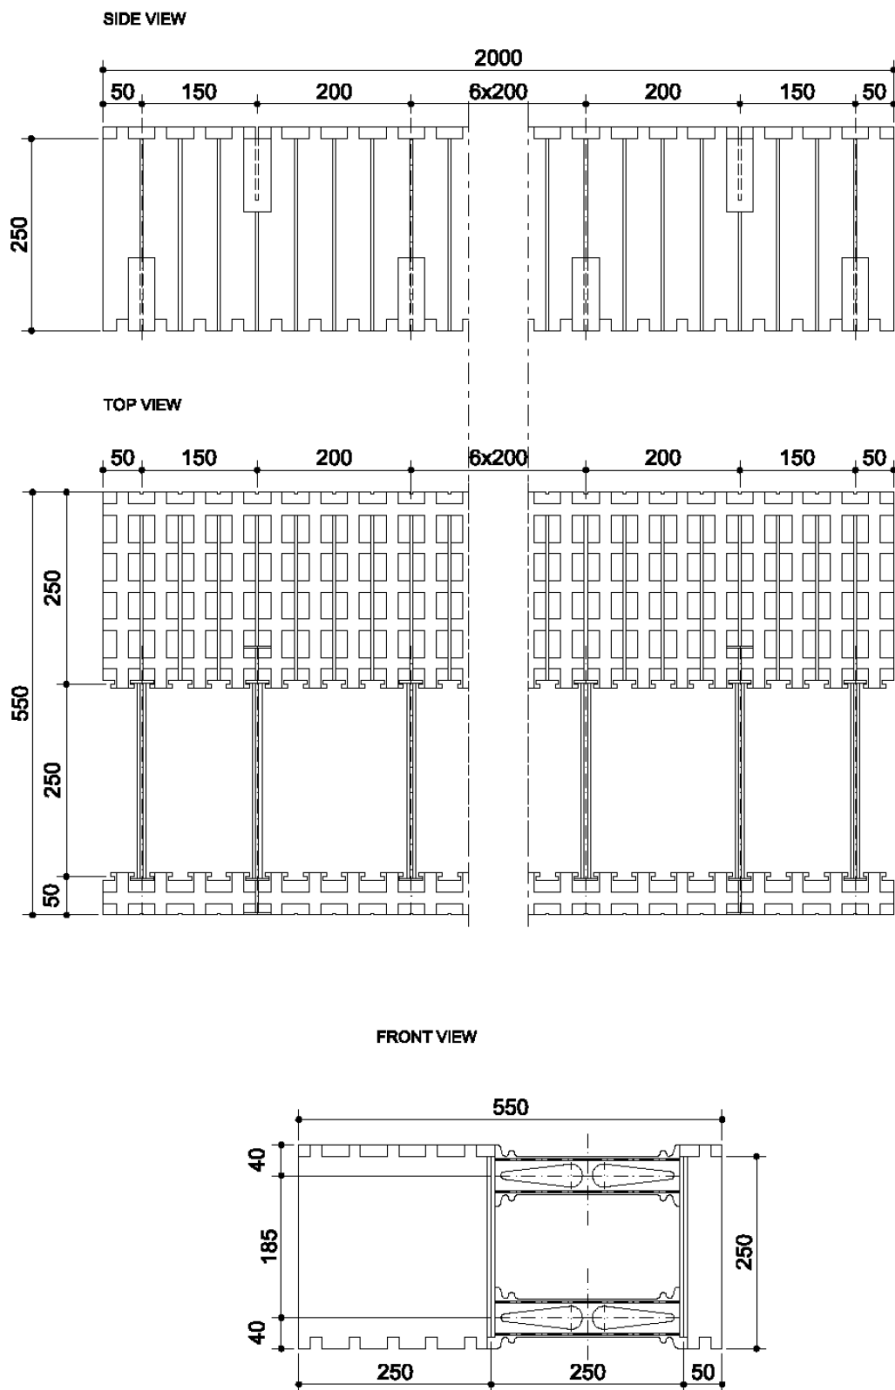


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

UNIVERSAL PLUS SYSTEM (DISMOUNTABLE ELEMENTS)  
Block with plastic tie MCFU 2/55++  
200cm x 25cm x 55cm

Annex A94

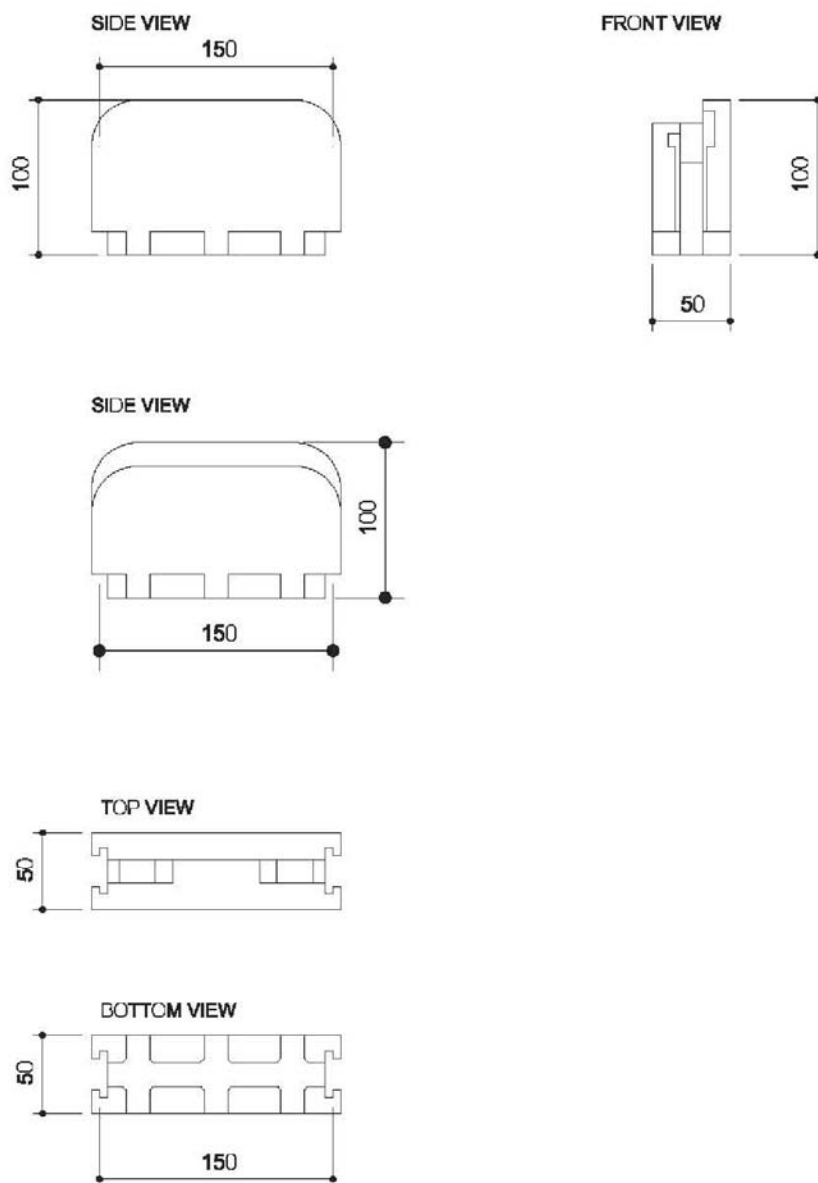


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "STANDARD"  
Top plug OH  
15cm x 5cm x 10cm

Annex A95

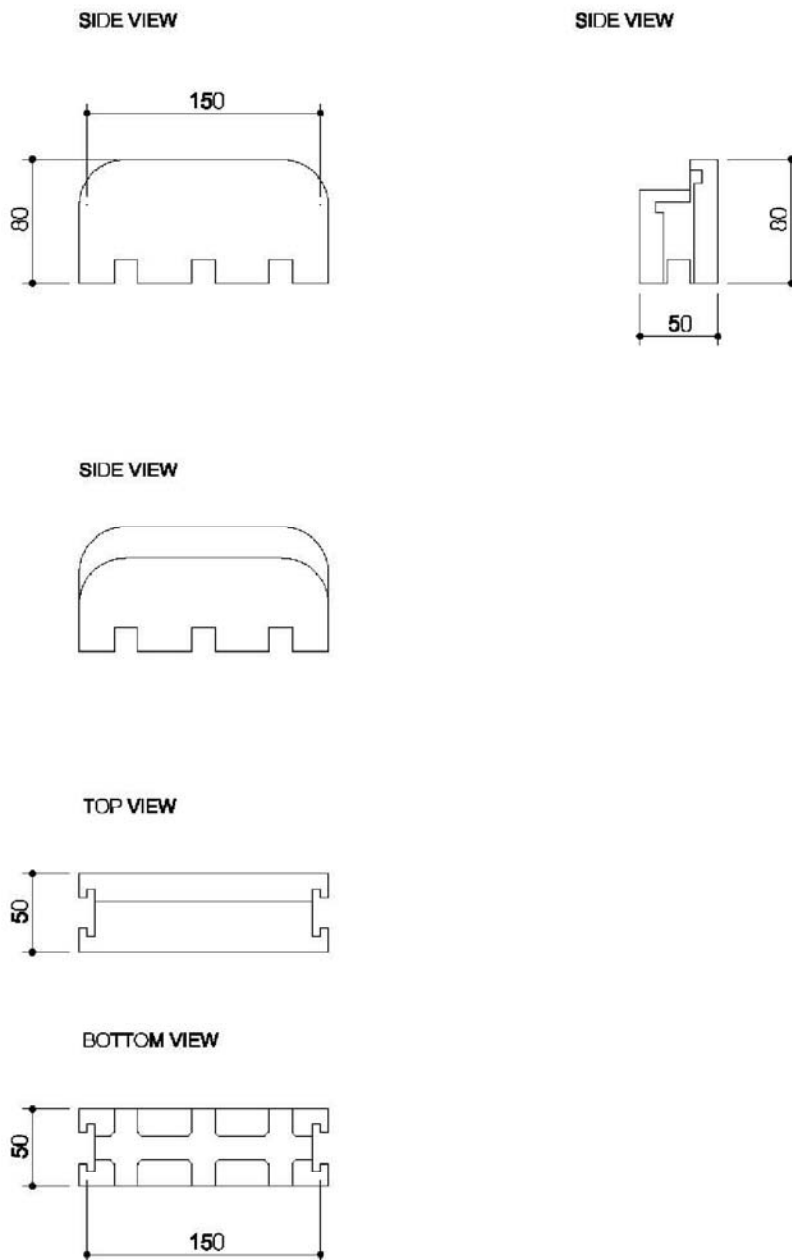


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "STANDARD"  
Bottom plug OB  
15cm x 5cm x 8cm

Annex A96

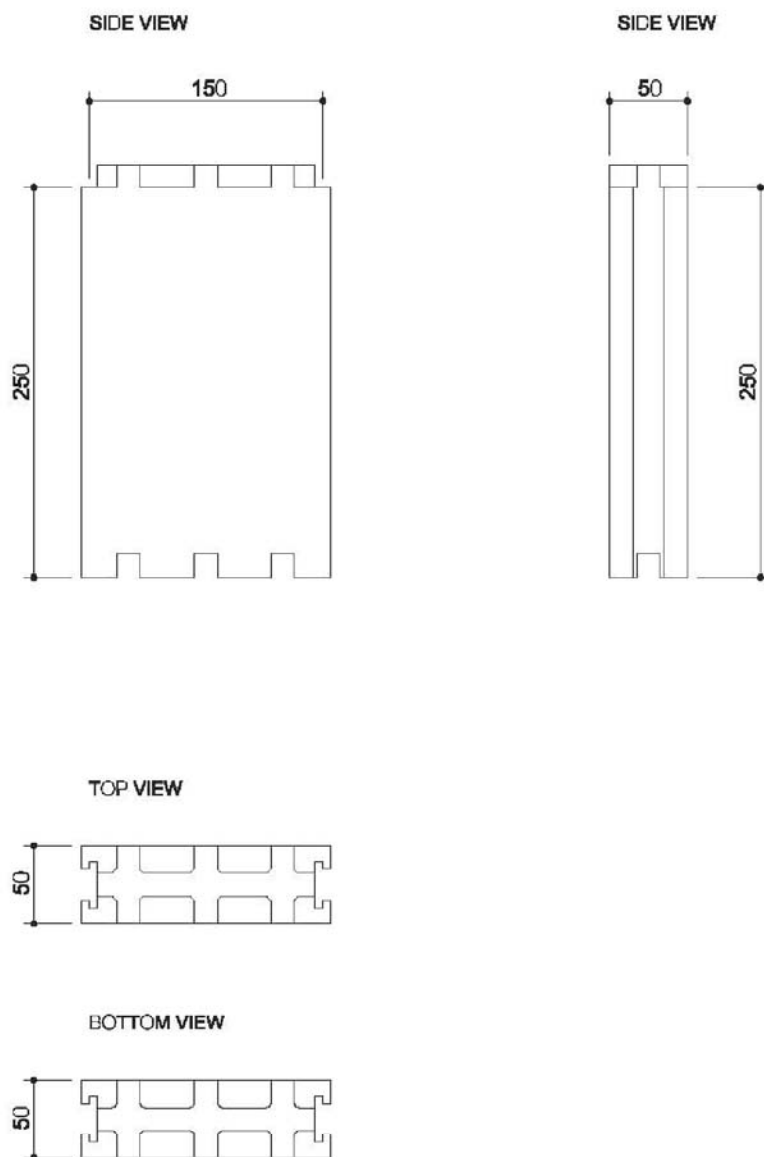


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "STANDARD"  
Insert element OC  
15cm x 5cm x 25cm


Annex A97

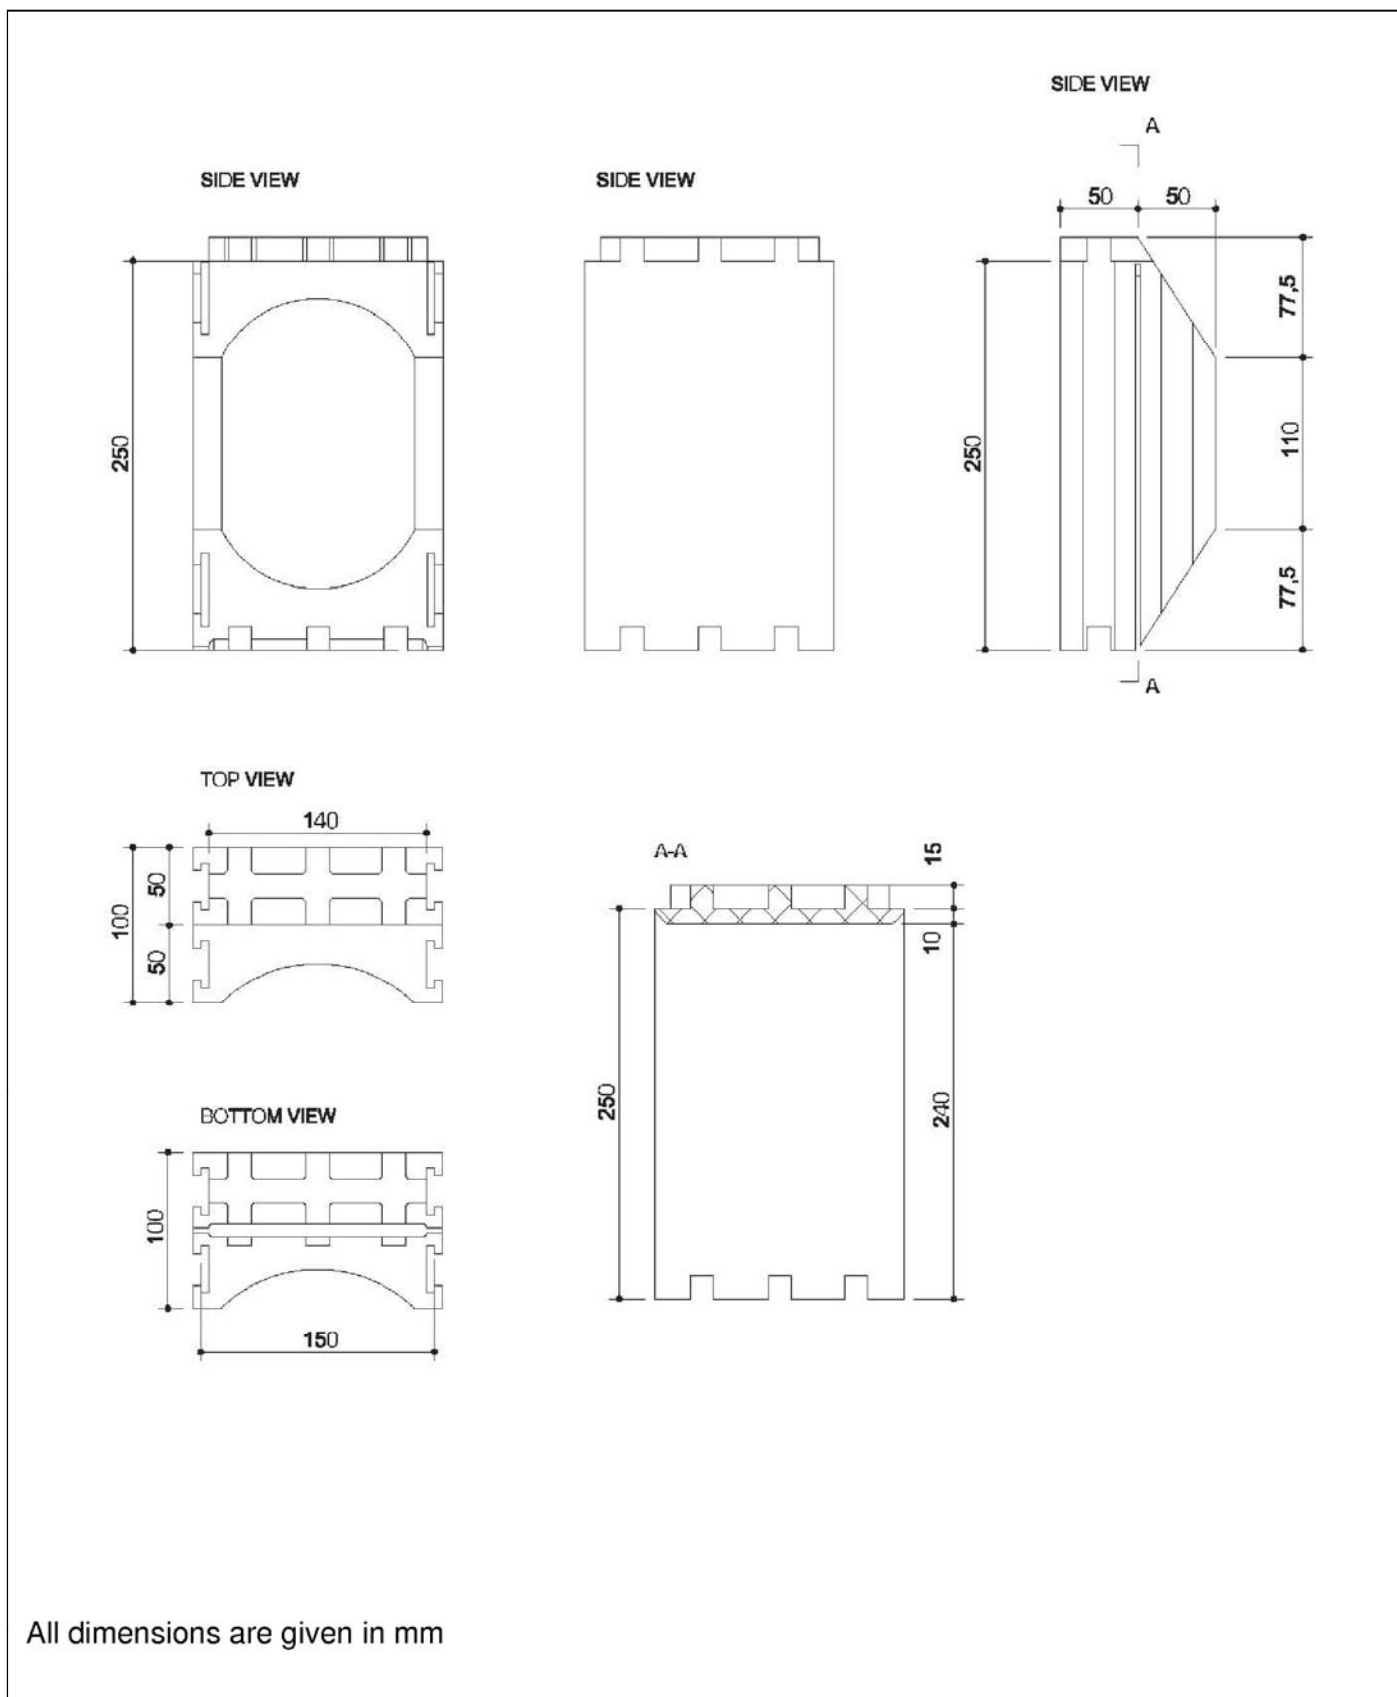

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "STANDARD"  
Double insert element OC BIS  
15cm x 10cm x 25cm

Annex A98

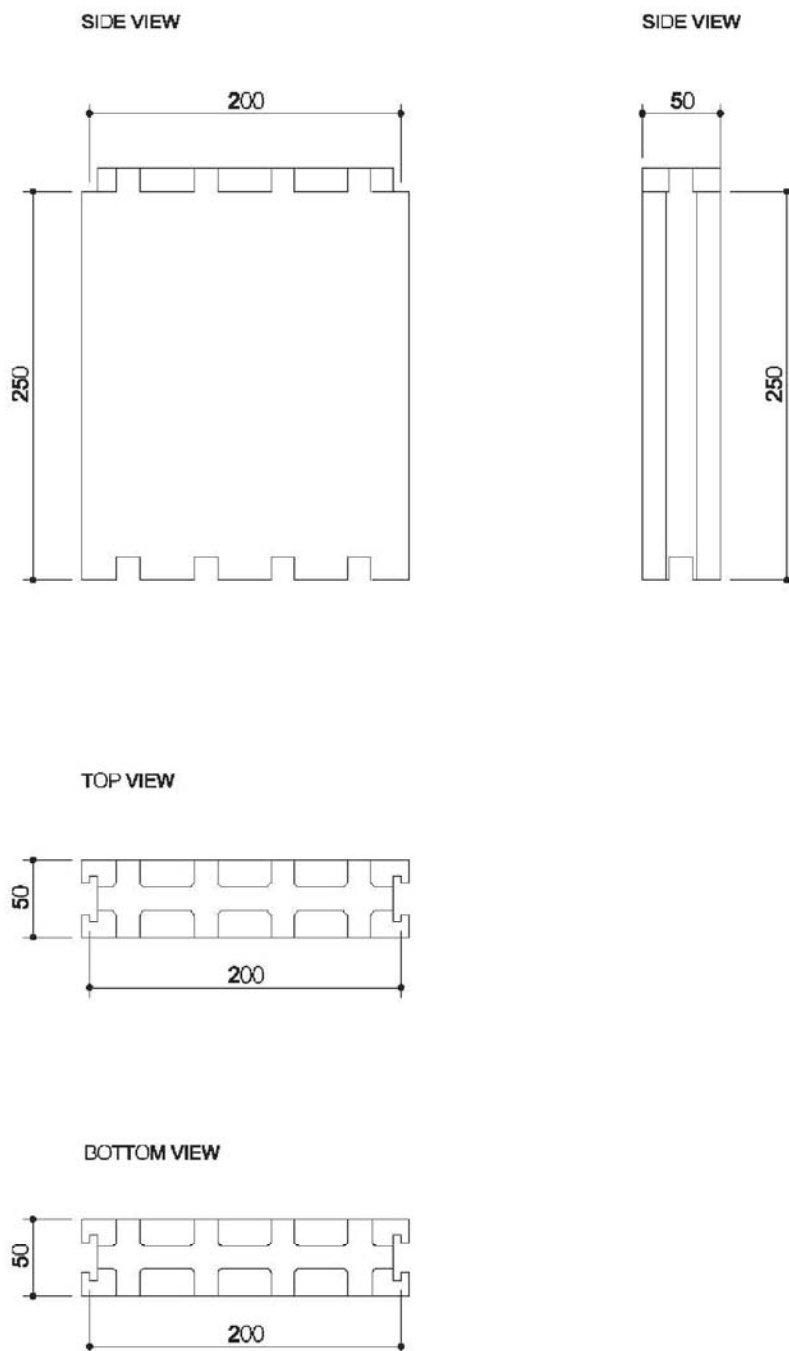


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "SUPER KING BLOCK PLUS"  
Insert element, core 20cm OC 0,2/1  
20cm x 5cm x 25cm

Annex A99

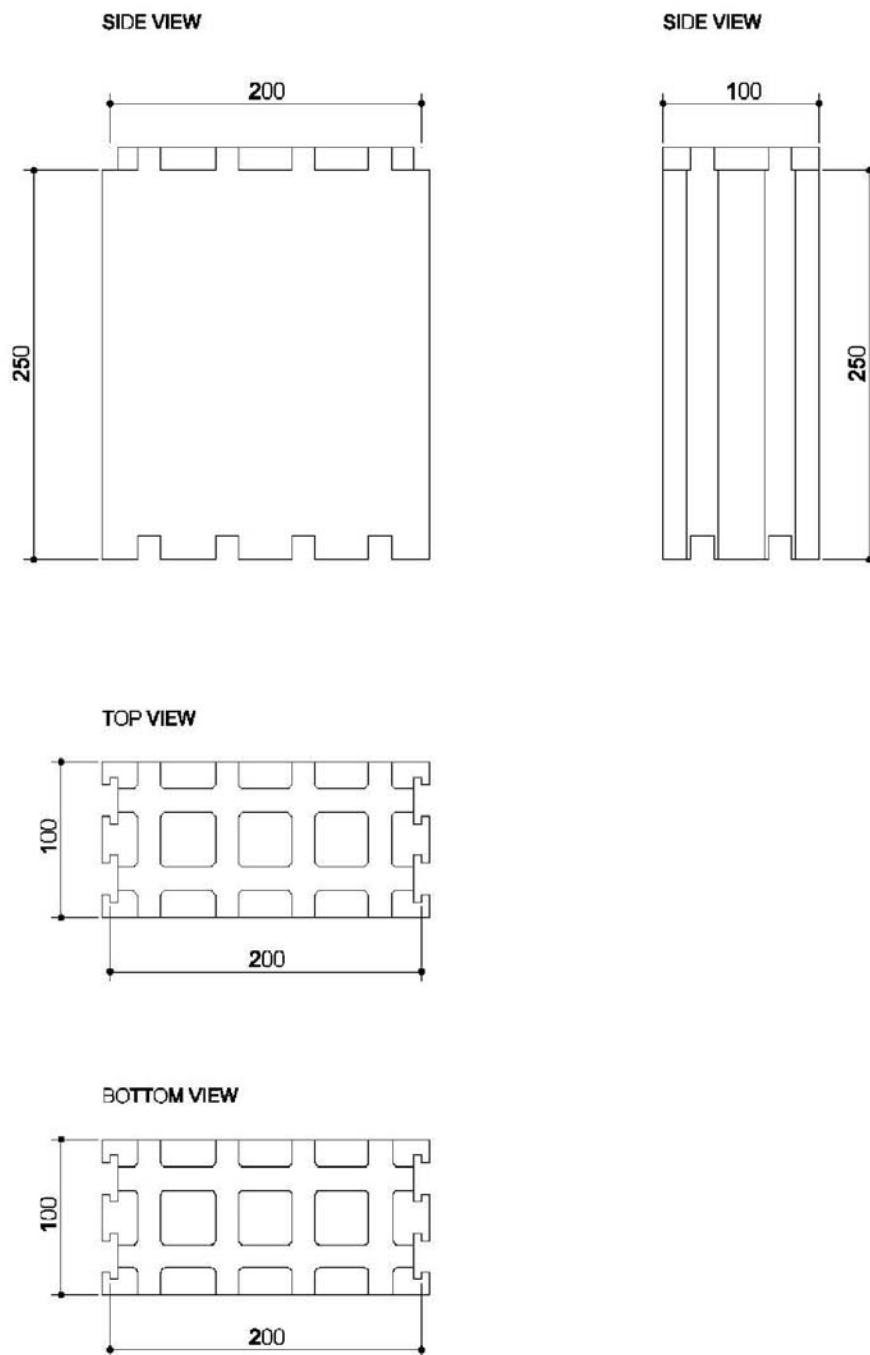


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "SUPER KING BLOCK PLUS"  
Double insert element, core 20cm OC 0,2/2  
20cm x 10cm x 25cm

Annex A100

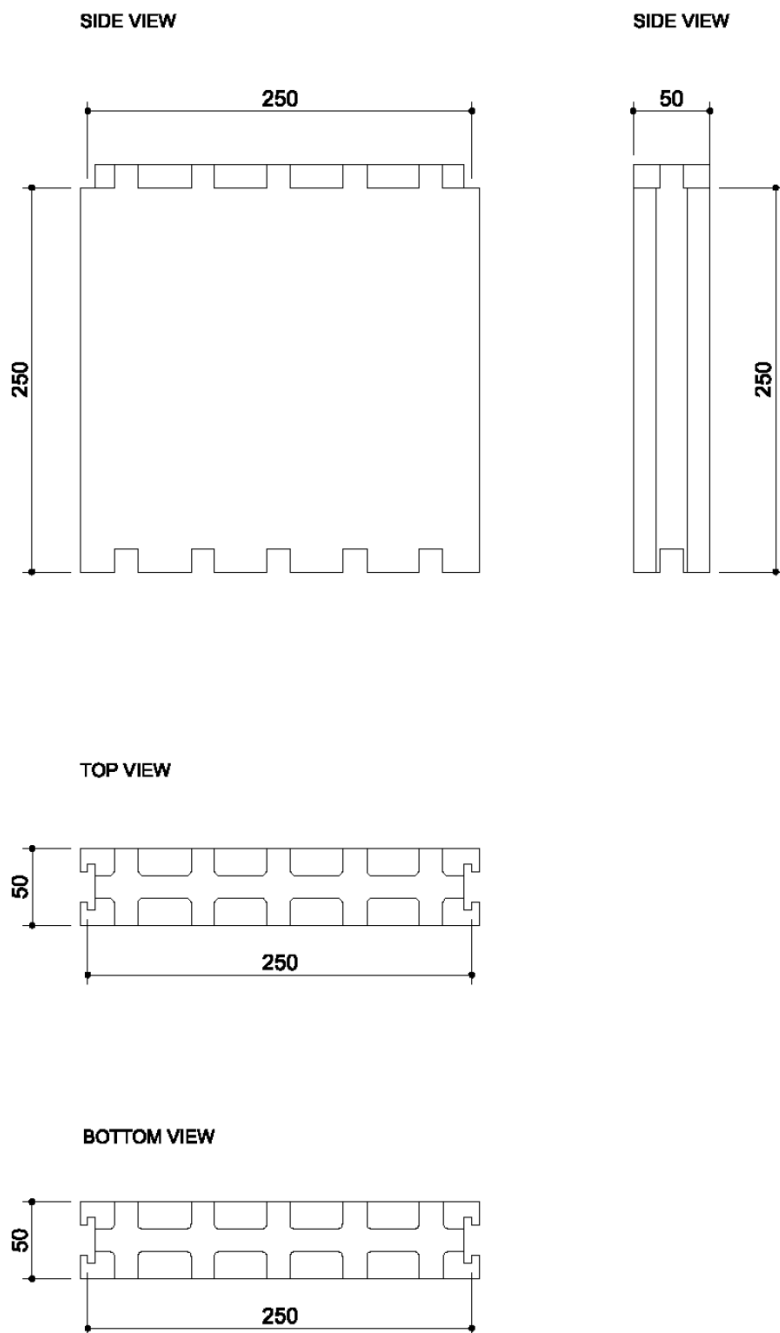


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "SUPER KING BLOCK PLUS"  
Insert element, core 25cm OC 0,25/1  
25cm x 5cm x 25cm

Annex A101




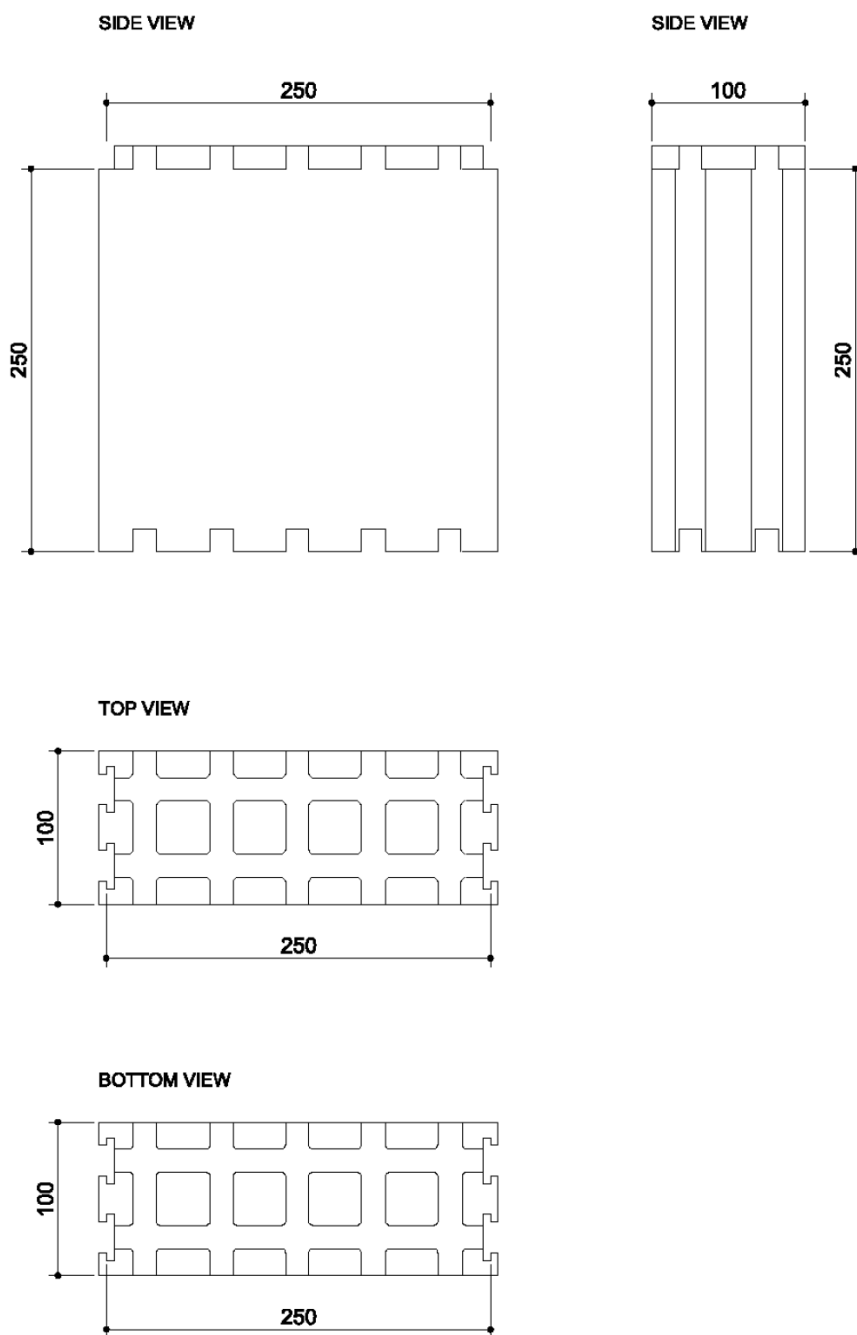


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "SUPER KING BLOCK PLUS"  
Double insert element, core 25cm OC 0,25/2  
25cm x 10cm x 25cm

Annex A102

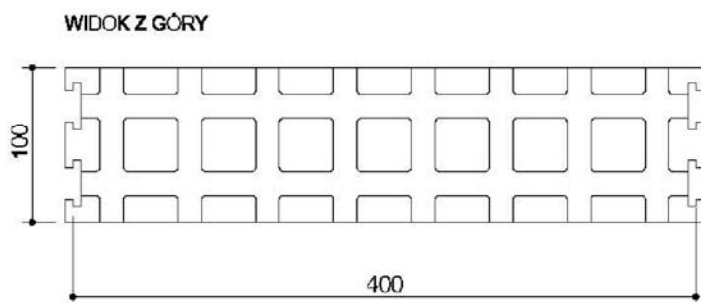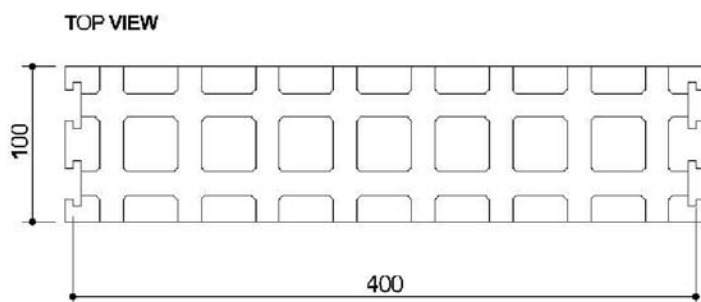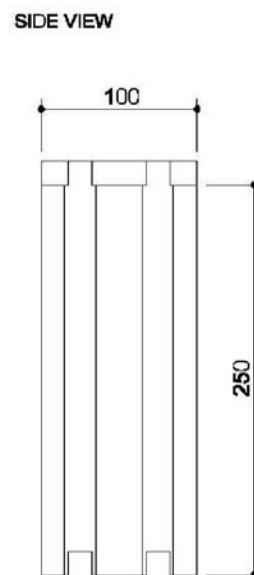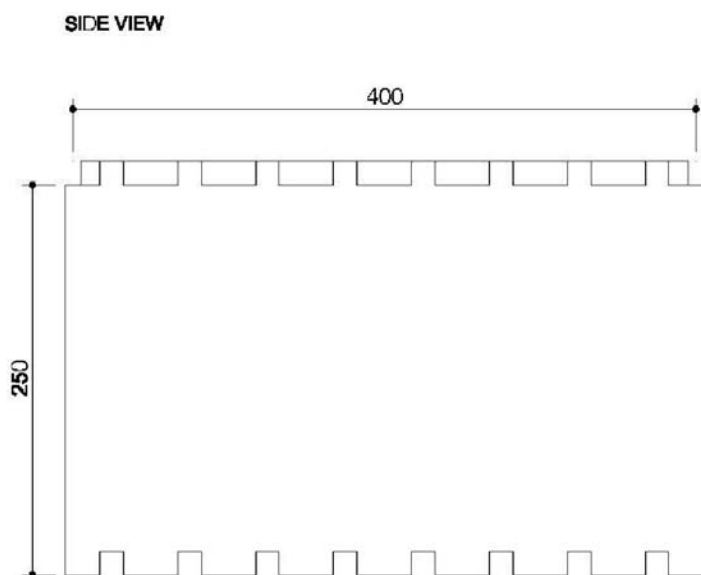


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT "UNIVERSAL SYSTEM"  
Double insert element, core 40cm OC 0,4/2  
40cm x 10cm x 25cm

Annex A103

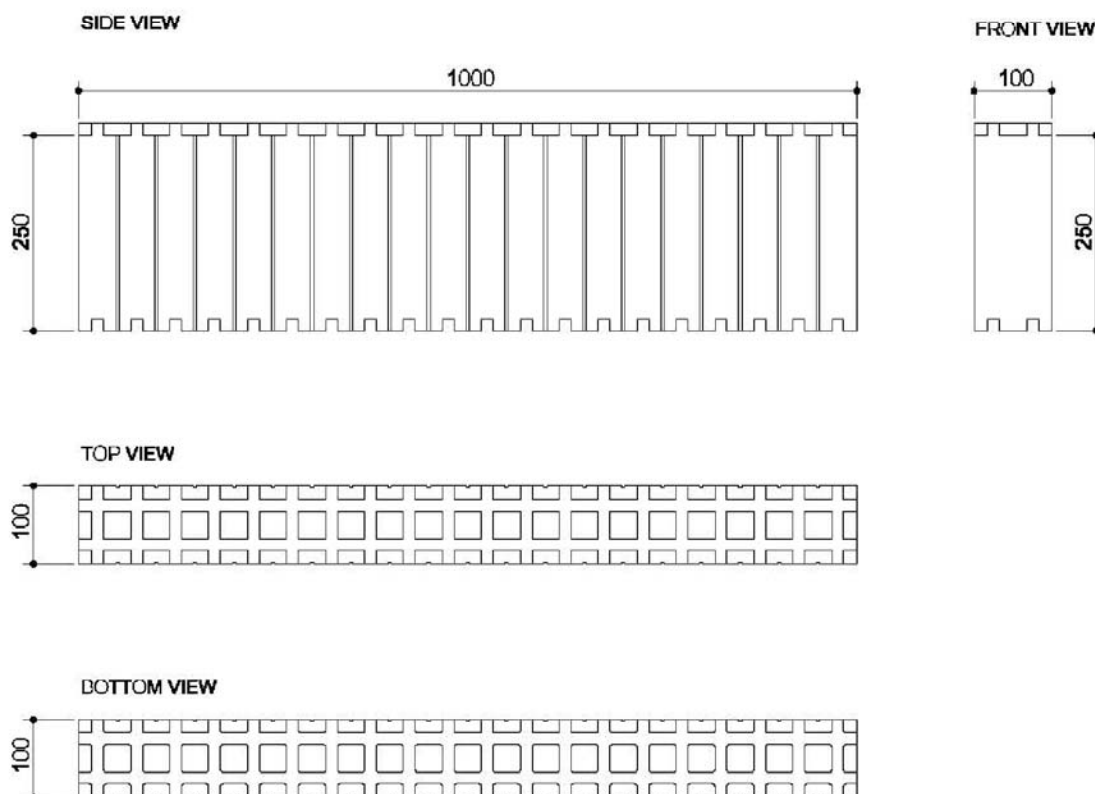


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Additional element MD 1/10  
100cm x 10cm x 25cm

Annex A104

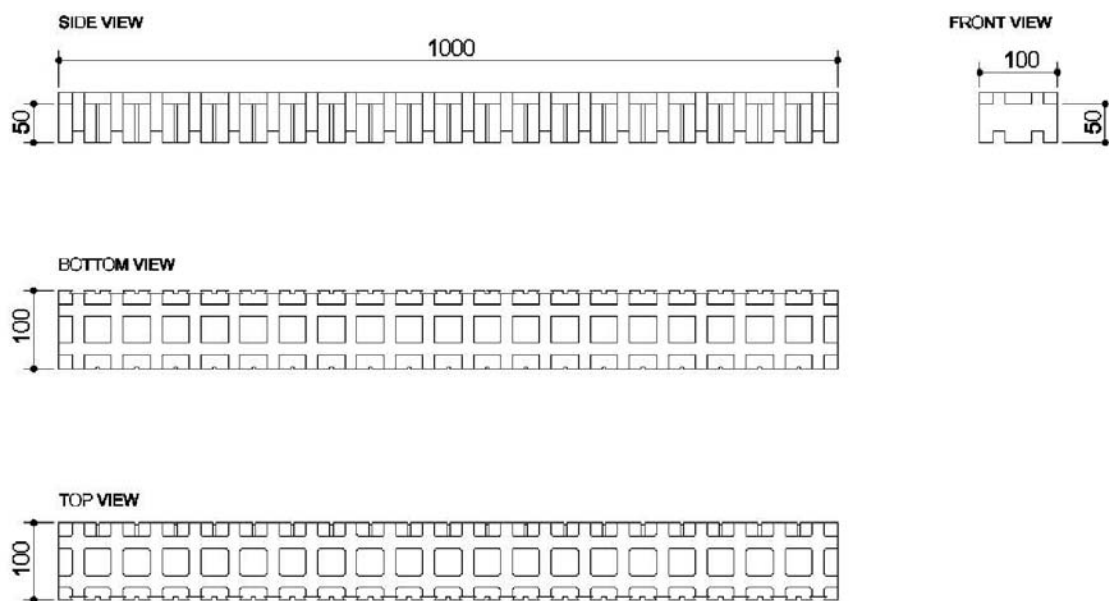


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Height adapter MHD 1/10  
100cm x 10cm x 5cm

Annex A105

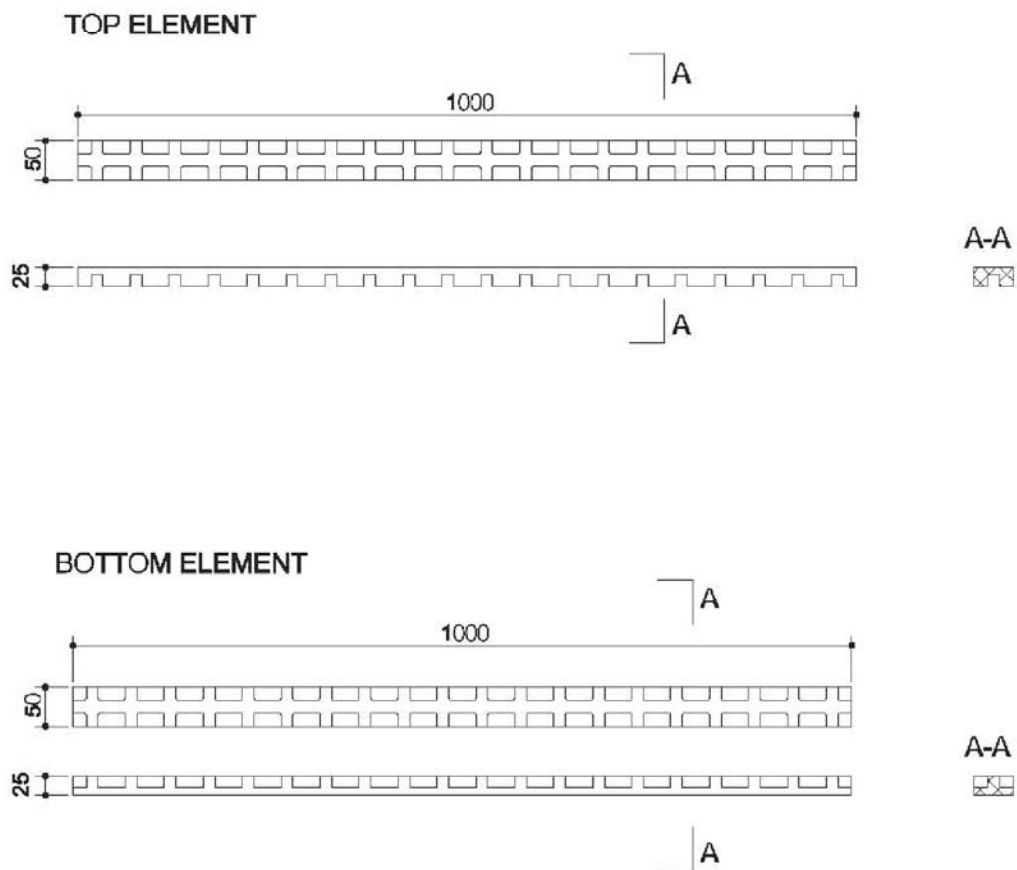


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Upper and bottom trimming strip LWG,LWD  
100cm x 5cm x 2,5cm

Annex A106

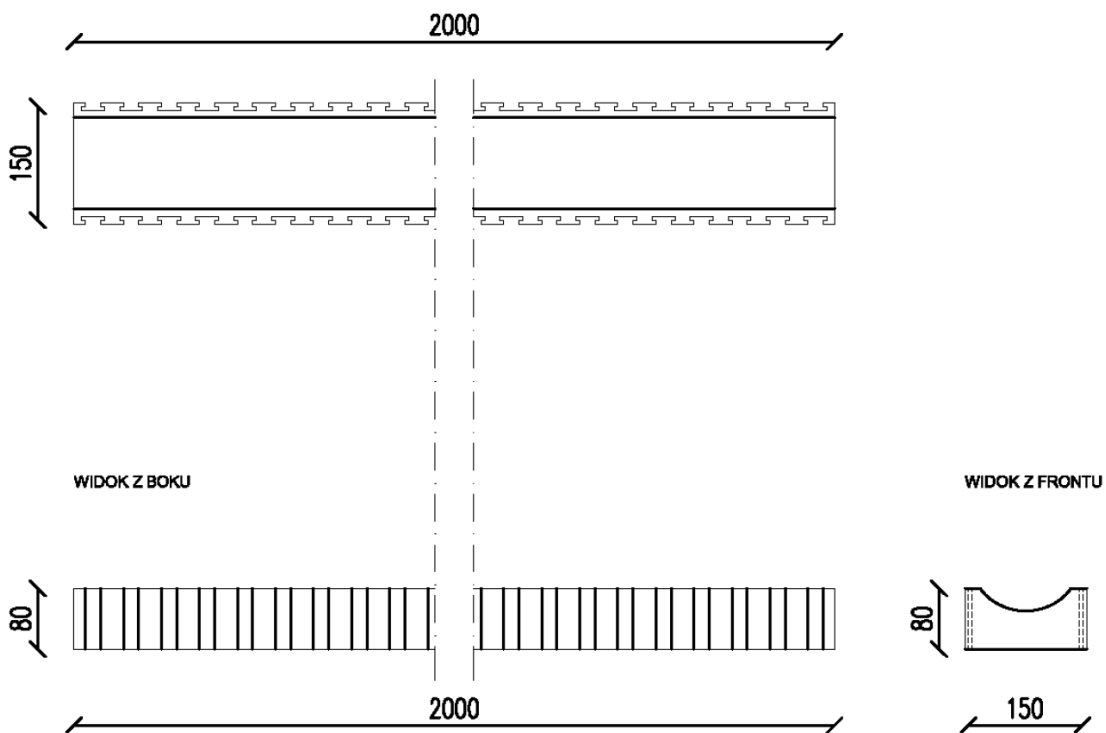


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Bottom of the header element MLI P 15  
200x8x15cm

Annex A107

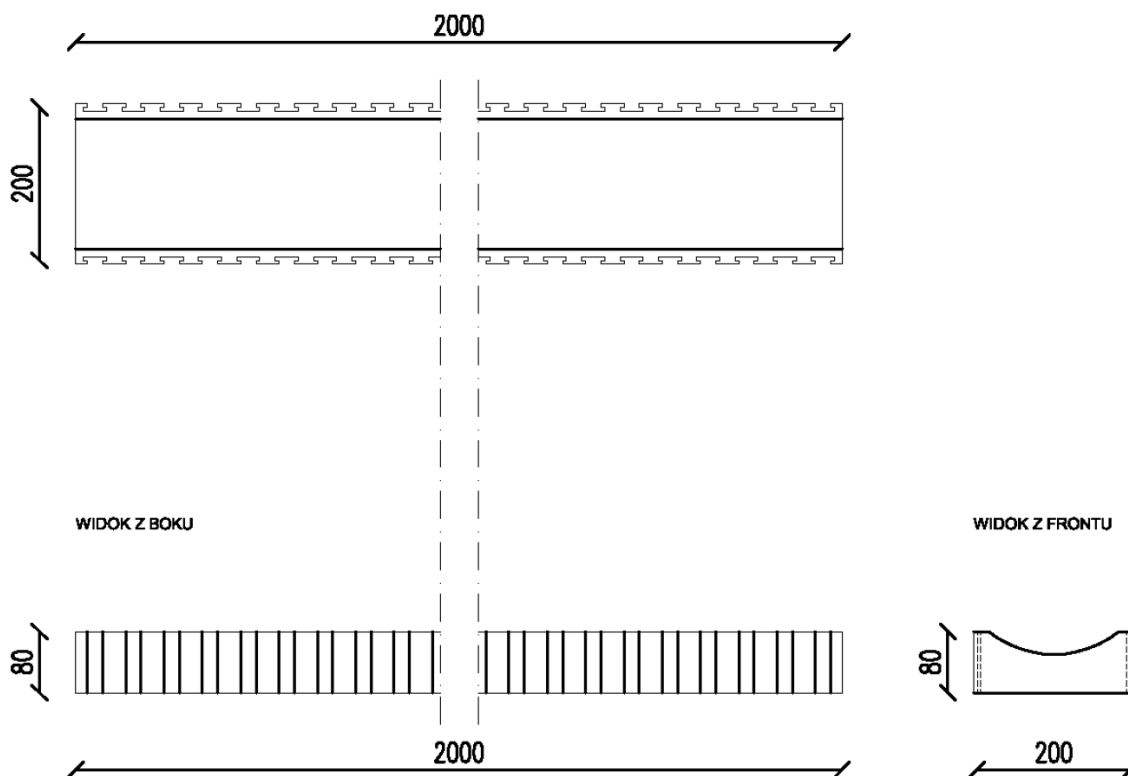


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"




ADDITIONAL ELEMENT  
Bottom of the header element MLIP 20  
200x8x20cm

Annex A108

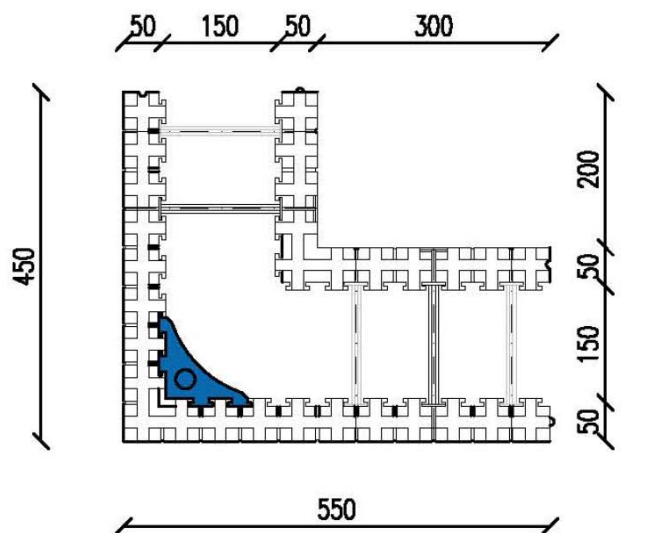

WIDOK Z GÓRY

WIDOK OD FRONTU

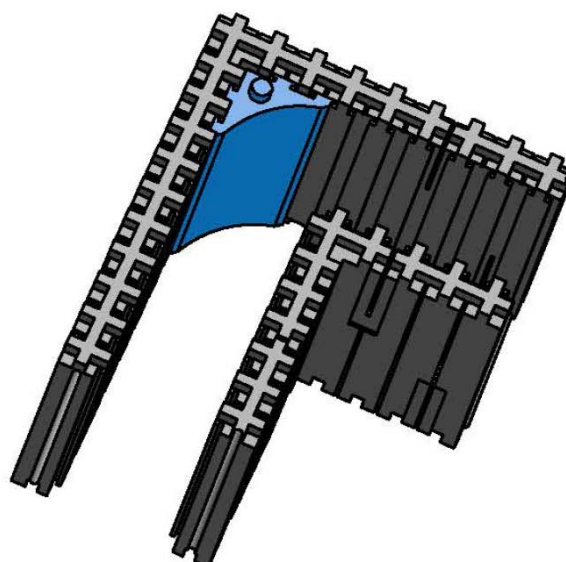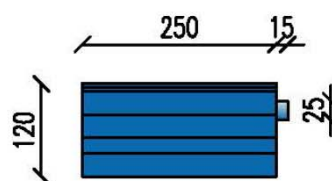


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
90° corner reinforcing element EC 90  
15cm x 25cm x 12cm

Annex A109

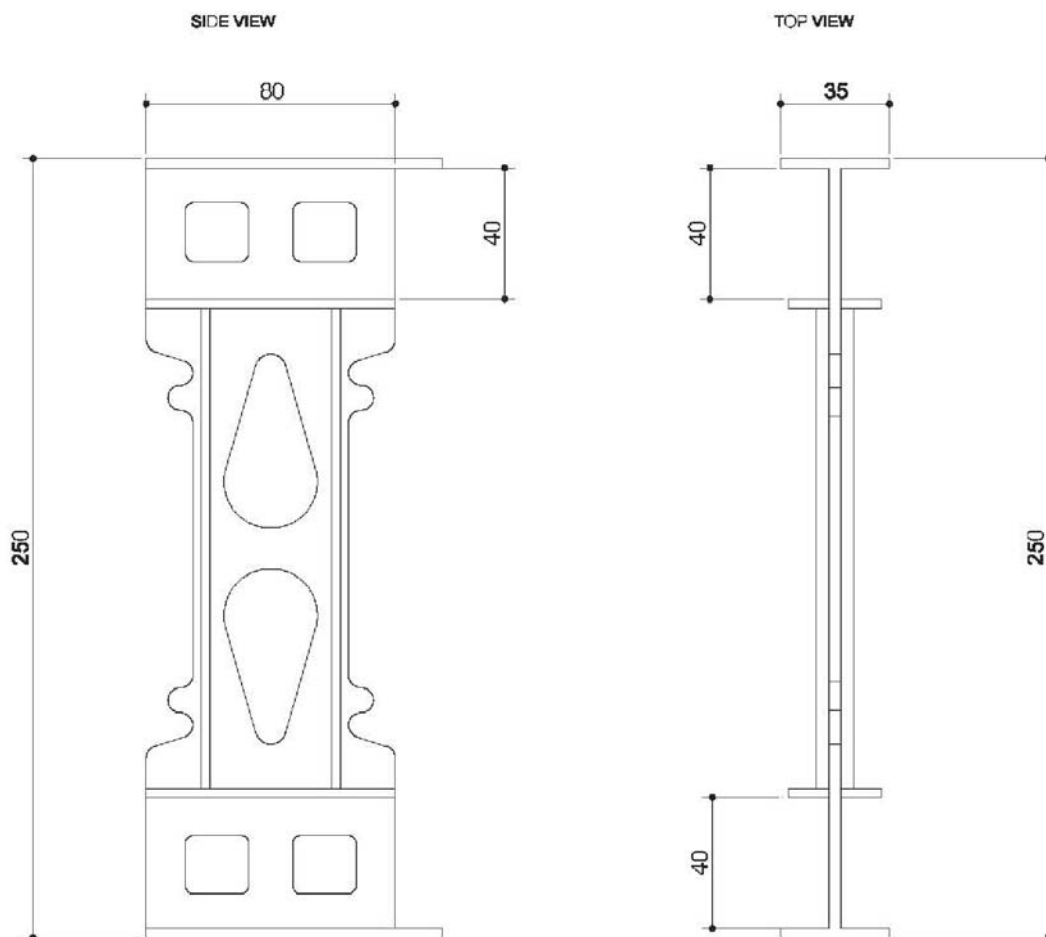


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

Wall type "UNIVERSAL"

Tie for elements on Annex A13, A14, A23 to A26, A32 to A35, A37 to A40, A47 to A50,  
A53 to A60 25 cm x 8 cm x 3.5cm

Annex A110

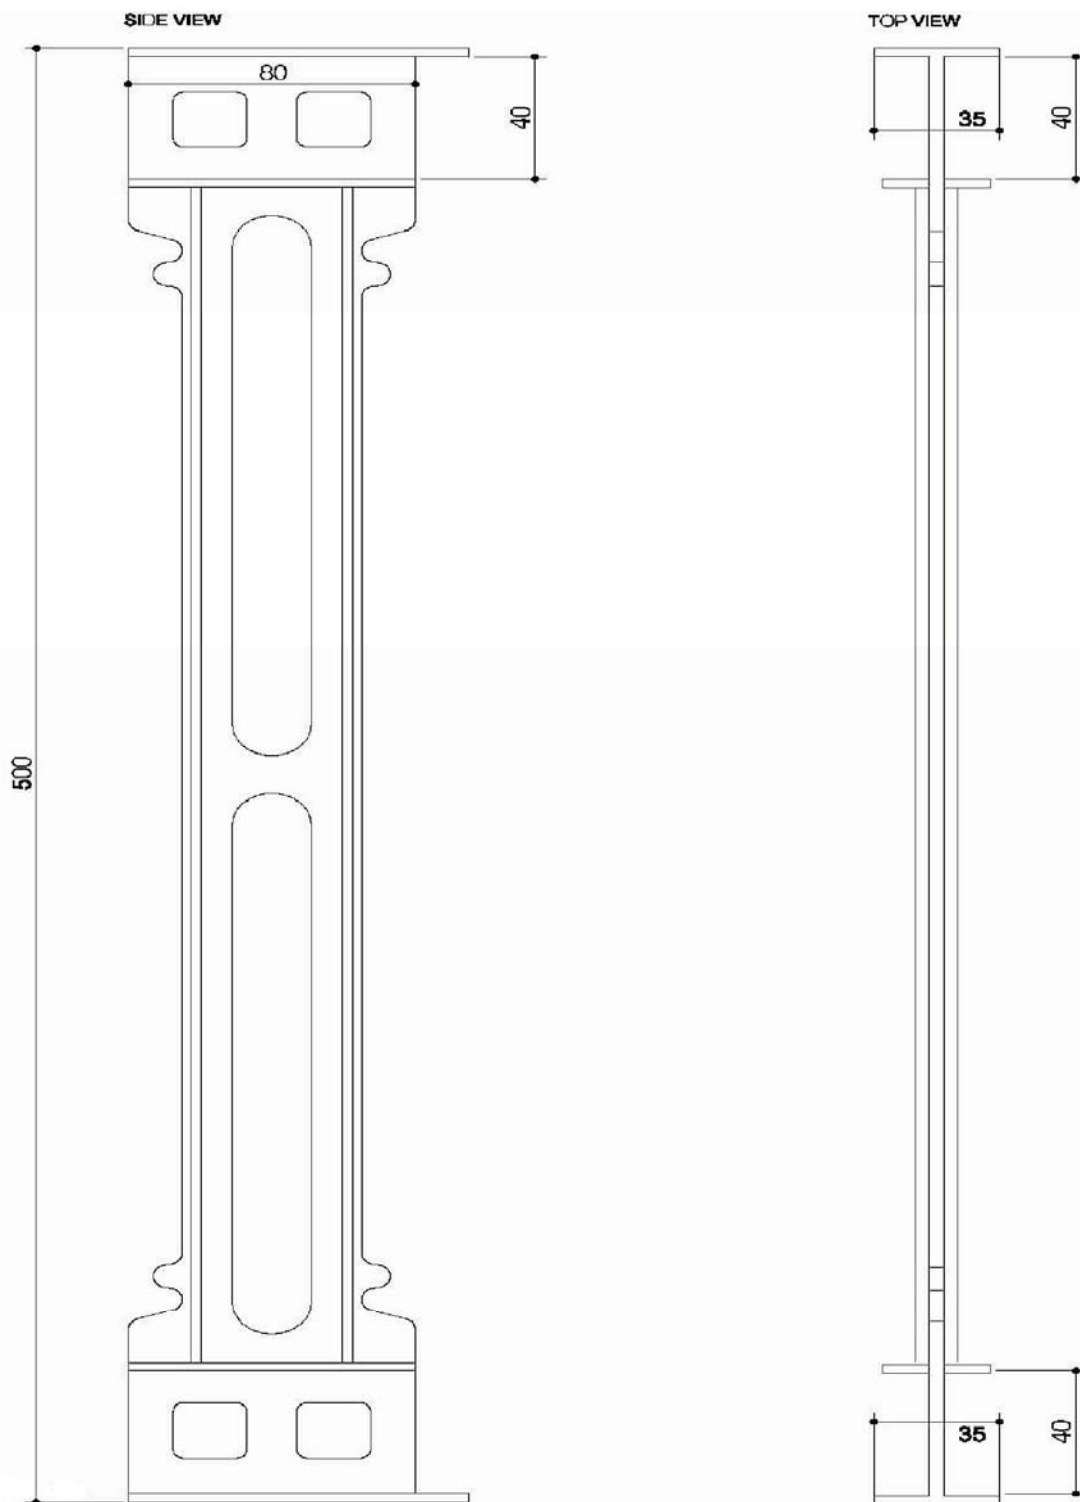


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

Wall type "UNIVERSAL"  
Tie for elements on Annex A61 and A62  
50 cm x 8 cm x 3.5 cm

Annex A111

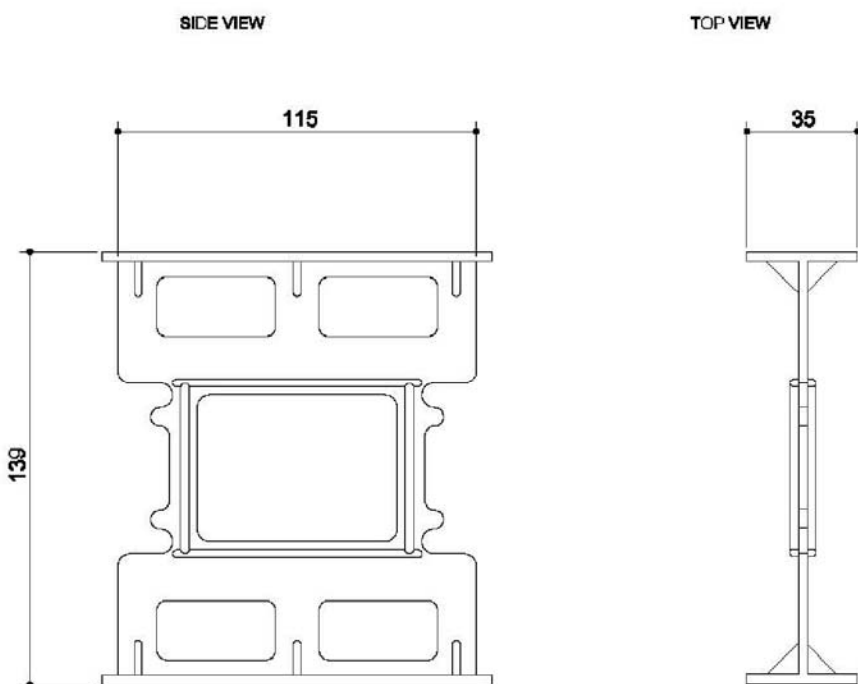


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

Wall type "UNIVERSAL"  
Tie for elements on Annex A6  
13.9 cm x 11.5 cm x 3.5 cm

Annex A112

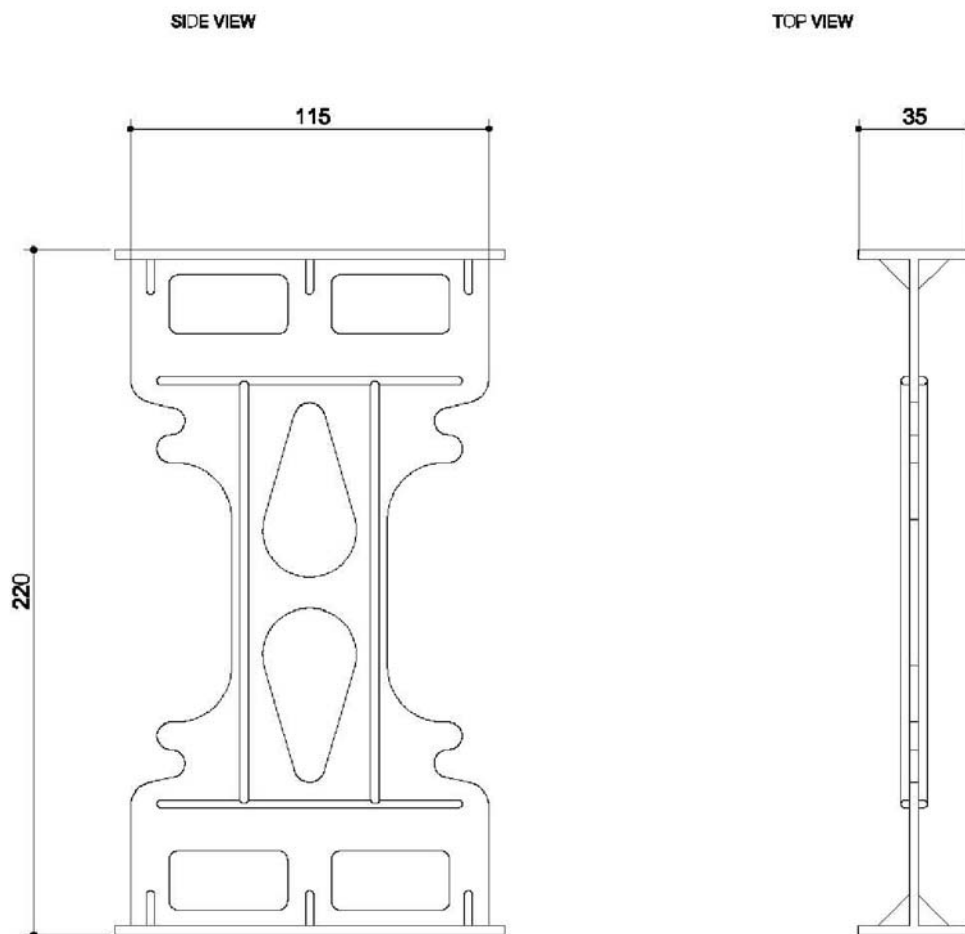


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

Wall type "UNIVERSAL" / "KING BLOCK"  
Tie for elements on Annex A4, A5, A12 and A13  
22 cm x 11.5 cm x 3.5 cm

Annex A113

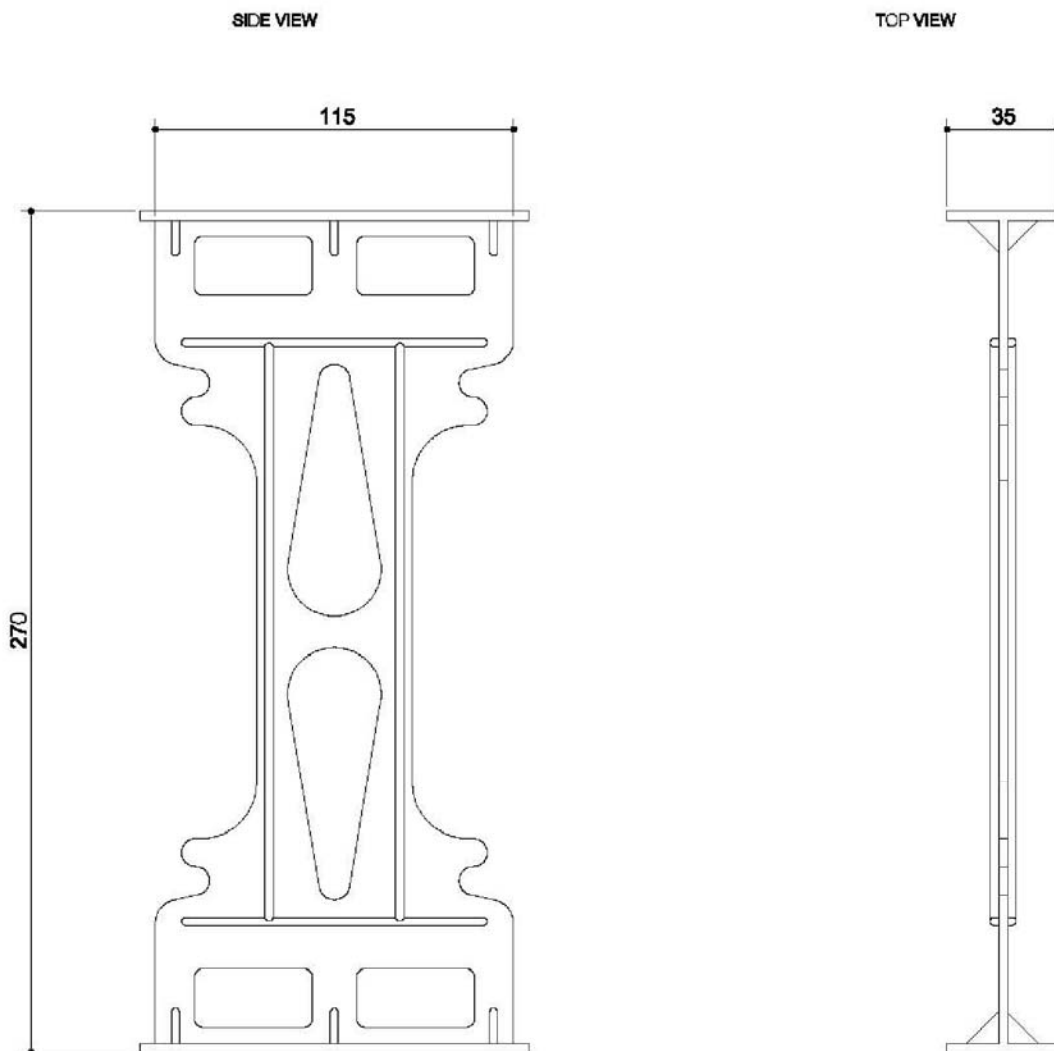


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


Wall type "SUPER KING BLOCK PLUS"  
Tie for elements on Annex A51 and A52  
27 cm x 11.5 cm x 3.5 cm

Annex A114


REBAR

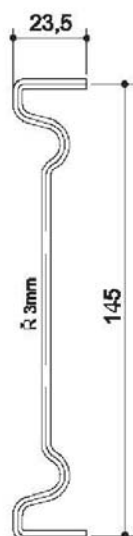

SIDE VIEW

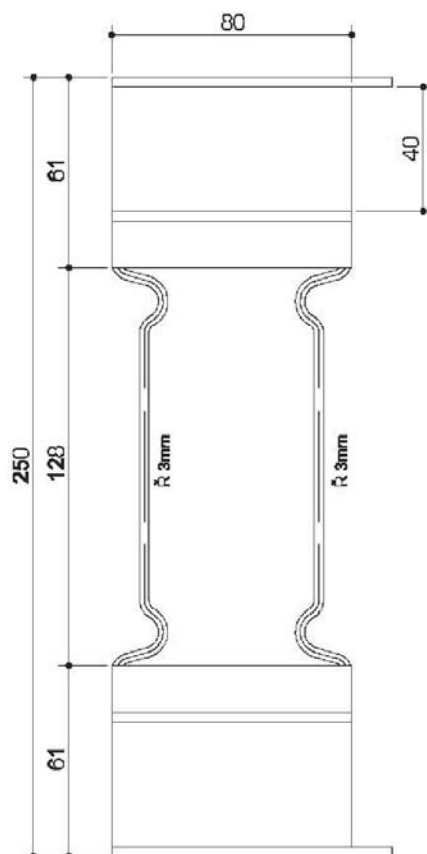

TOP VIEW

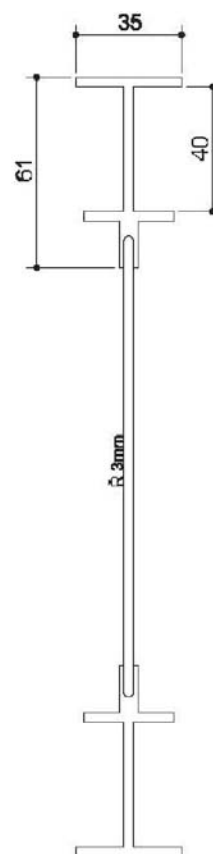


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

Wall type "UNIVERSAL"  
Tie for elements on Annex A64 to A70  
25 cm x 8 cm x 3.5 cm

Annex A115

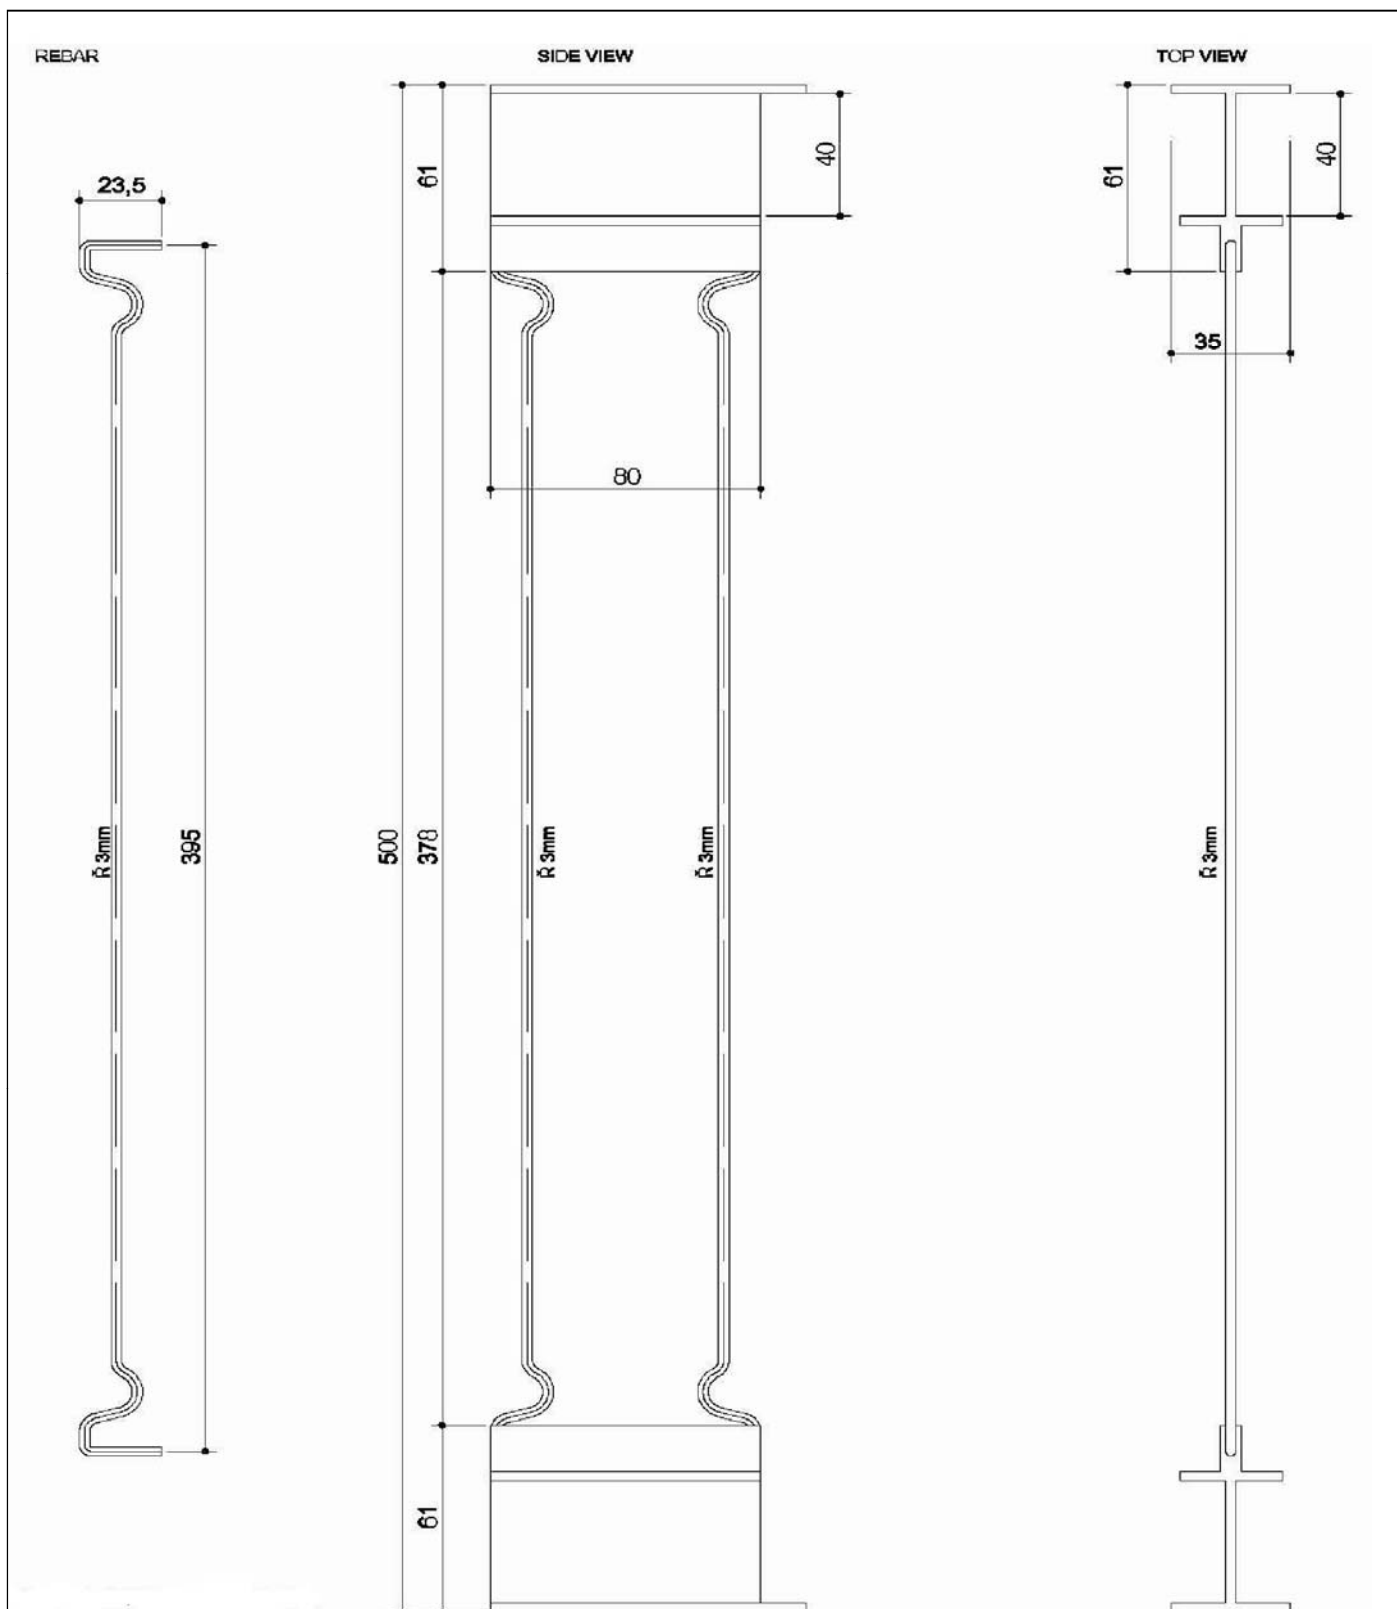


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Tie for elements on Annex A71 and A72  
50cm x 8cm x 3,4cm

Annex A116

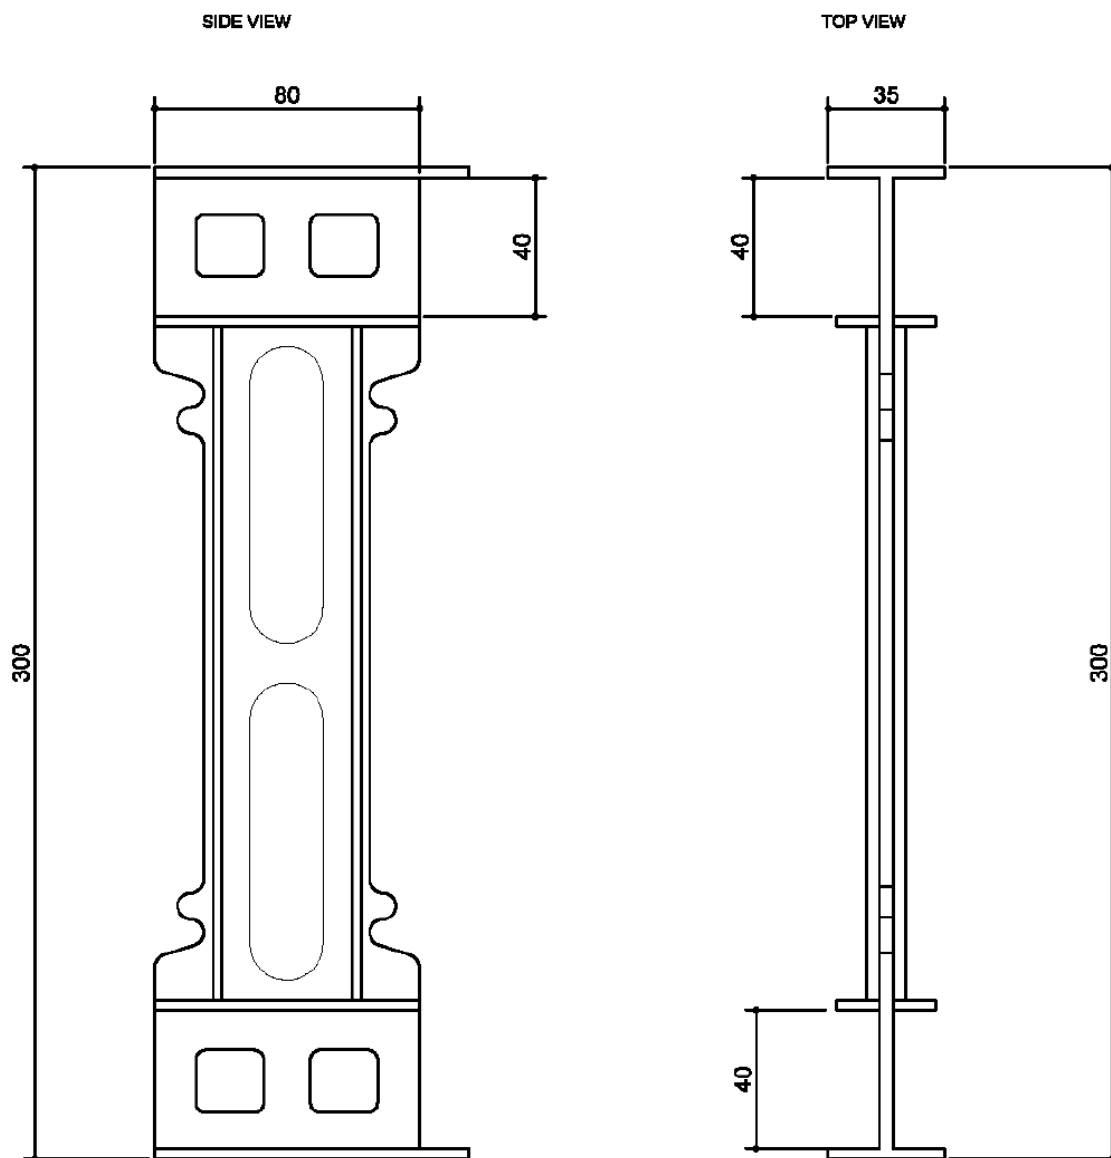


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Tie for elements on Annex A73 to A76  
30cm x 8,5cm x 3,5cm

Annex A117

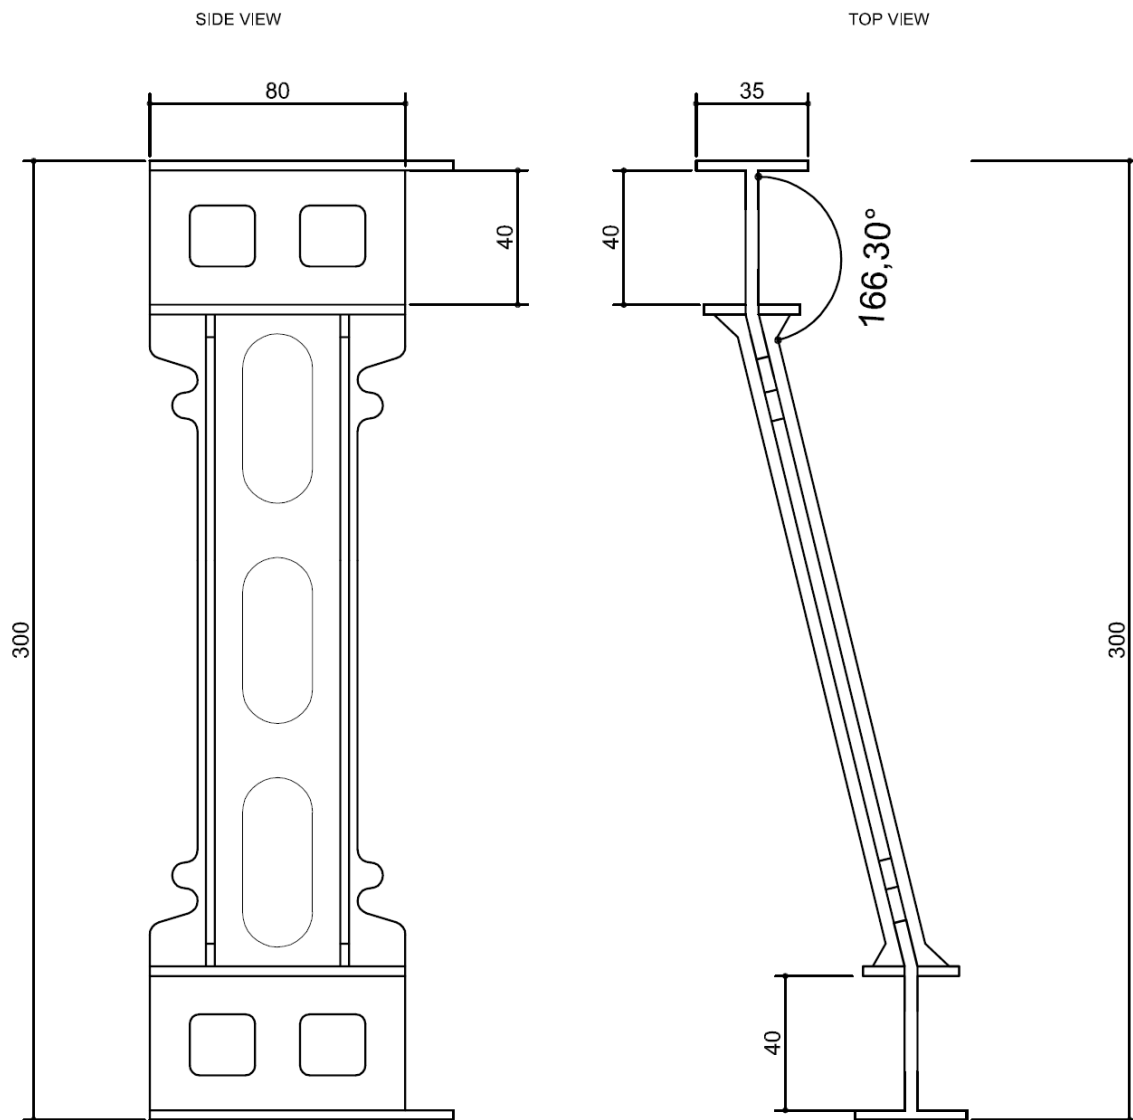


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Tie for elements on Annex A77 to A90  
30cm x 8cm x 3,5cm

Annex A118

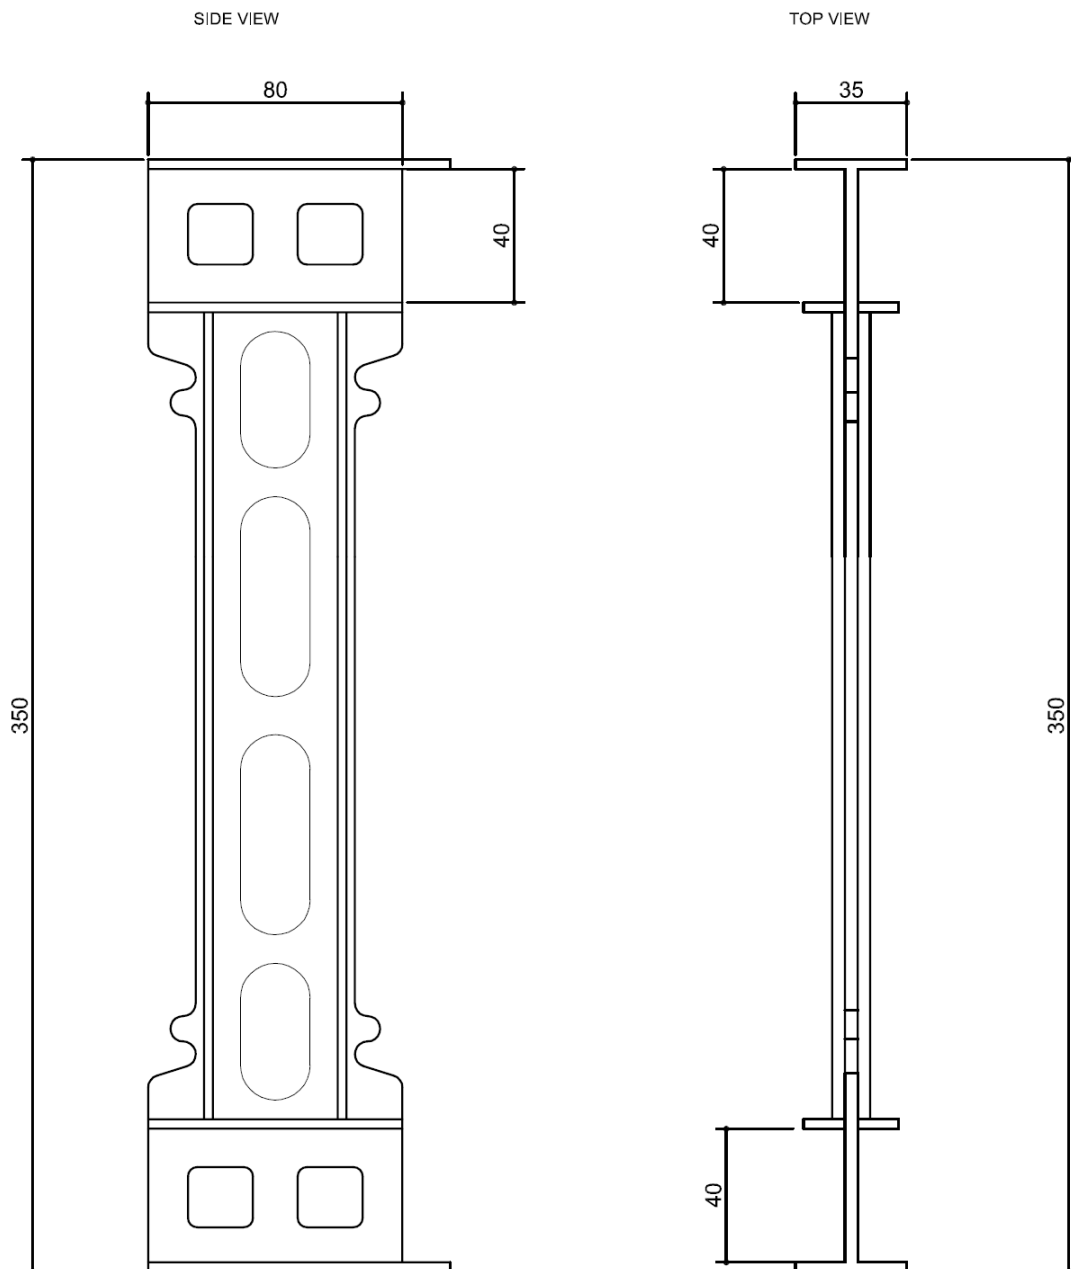

All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

ADDITIONAL ELEMENT  
Tie for elements on Annex A91 to A94  
35cm x 8cm x 3,5cm

Annex A119

**Installation**

**1 General**

The manufacturer shall ensure that the requirements in accordance with sections 1, 2, and 4 are made known to those involved in planning and execution. The installation guide is deposited at DIBt and shall be present at every construction site. If the manufacturer's instructions contain provisions which differ from those stated here, the specifications of the ETA shall apply.

After installation of the shuttering elements (see 2) the site-mixed or ready mixed concrete is brought in and compacted.

In end use conditions concrete walls of grid (MC) and continuous type<sup>1</sup> (MCF, MCFU and MCFU-St) of plain or reinforced concrete according to EN 1992-1-1 or corresponding national rules will be formed.

In end use conditions the EPS-shuttering leaves are the main part of the thermal insulation of the walls.

**2 Installation of the shuttering elements**

The shuttering elements are put together on site in layers without mortar or adhesive. To receive stable floor high formworks the vertical joints between two elements of one layer have to be shifted of at least a quarter of the element length to the vertical joints of the previous layer.

First of all two layers of the entire floor plan are to be interlocked according to the installation guide of the manufacturer.

Afterwards leveling to the subsoil is performed (foundation, bottom plate, ceiling). Voids between the shuttering leaves and the uneven subsoil are to be sealed with PU foam before concreting.

Subsequently, according to the installation guide of the manufacturer, the walls are to be interlocked to floor height, leveled and fastened to the scaffolding supports.

The scaffolding supports are to be arranged at a distance of 1.20 m to 1.50 m at the most, to be connected over the entire wall height with the shuttering elements and to be fastened to the floor.

The necessary reinforcement according to static calculation also shall be installed in an appropriate way. Rectangular wall corners are to be formed according to Annex B16 to B19. Further information is given in the installation guide.

**3 Concreting**

For the production of normal concrete EN 206 shall apply. The consistency of concrete on compacting by shaking shall be within the lower consistency range F3 and on compacting by poking within the upper consistency range F3. The maximum aggregate size shall be at least 8 mm and shall not exceed 16 mm. The concrete shall have rapid or middle strength development according to EN 206-1, Table 16.

Placing the concrete shall be performed only by persons who were instructed in the works and in the proper handling of the shuttering system.

The maximum filling height amounts to 0.6 m at a concreting velocity of 1 m/h.

If equivalent national rules are not available the following instructions shall be considered:

Horizontal day joints are to be arranged preferably at the height of the floor. If day joints cannot be avoided before reaching the floor height vertical composite reinforcement bars has to be installed. The composite reinforcement shall comply with the following requirements:

- two adjacent composite reinforcement bars shall not be situated in the same plane parallel to the surface of the wall,
- the distance between two composite reinforcement bars in wall direction shall be at least 10 cm and not larger than 50 cm,
- the total section area of the composite reinforcement bars shall not be minor than 1/2000 of the section area of the concrete,
- anchorage length of the composite reinforcement bars on both sides of the day joint at least shall be 20 cm

<sup>1</sup> see ETAG 009 chapter 2.2

Permanent shuttering kit "IZODOM 2000 POLSKA"		Annex B1 Page 1 of 2
Installation		

Before the further placing of concrete, cement laitance and detached / loose concrete shall be removed and the day joints shall be sufficiently pre-wetted. At the time of concreting the surface of the older concrete shall be slightly moist, so that the cement paste of the newly brought in concrete can combine well with the older concrete.

If no day joint is planned, placing of concrete in layers may only be interrupted if the concrete layer brought in last has not yet solidified so that a good and even bond is still possible between the two concrete layers. When using internal vibrators the vibrating cylinder shall still penetrate into the already compacted lower concrete layer.

The concrete may fall freely only up to a height of 2 m, beyond that the concrete shall be cohered by discharge pipes or concreting tubes with a diameter of 100 mm at the most and shall be led shortly before the place of installation.

Cones from pouring are to be avoided by short distances of the places of fill in.

Planning shall allow for sufficient spaces in the reinforcement for discharge pipes or concreting tubes.

After concreting the walls shall not deviate from the plumb line more than 5 mm per running meter wall height.

The ceiling shall only be placed on walls made of shuttering elements if a sufficient strength of the concrete core exists.

#### 4 Ducts crossing and situated inside the wall

Horizontally passing ducts are to be installed according to the installation guide of the ETA applicant and are to be taken into account when designing the wall.

Horizontal ducts situated inside the wall cores and running parallel to the wall surfaces are to be avoided. If absolutely necessary, these are to be taken into account when designing the wall.

Also vertical ducts in the concrete core shall be considered, if their diameter exceeds 1/6 of the thickness of the concrete core and the distance of the pipes is less than 2 m.

#### 5 Reworking and finishes

Walls of the type "IZODOM 2000 POLSKA" are to be protected by finishes. Finishes are not part of the kit and therefore not considered in this ETA. Preferably for external surfaces the used rendering systems should meet the requirement of ETAG 004. Execution of the rendering shall be performed according to applicable national rules.

#### 6 Fixing of objects


Fixing of objects in the shuttering leaves is not possible, the part of fixings which is significant for the mechanical resistance shall be in the concrete. The influence of the fixing to the reduction of the thermal resistance has to be considered according to EN ISO 6946.

Permanent shuttering kit "IZODOM 2000 POLSKA"

Installation

Annex B1  
Page 2 of 2

standards and guidelines	issue	title
EN 206	2013+A1:2016	Concrete – Specification, performance, production and conformity
EN 1992-1-1	2004 +AC:2010+A1:2014	Eurocode 2: Design of concrete structures – Part 1-1: General rules and rules for buildings;
EN 13163	2012 +A1:2015	Thermal insulation products for buildings – Factory made expanded polystyrene (EPS) products – Specification
EN 13501-1	2007 +A1:2009	Fire classification of construction products and building elements – Part 1: Classification using data from reaction to fire tests;
EN 13501-2	2016	Fire classification of construction products and building elements – Part 2: Classification using data from fire resistance tests, excluding ventilation services;
EN ISO 6946	2007	Building components and building elements – Thermal resistance and thermal transmittance – Calculation method (ISO 6946:2007);
EN ISO 10456	2007 +AC:2009	Building materials and products – Hygrothermal properties – Tabulated design values and procedures for determining declared and design thermal values (ISO 10456:2007 + Cor. 1:2009);
EN ISO 13788	2001	Hygrothermal performance of building components and building elements . Internal surface temperature to avoid critical surface humidity and interstitial condensation . Calculation methods (ISO 13788:2001);
ETAG 004	2013-06	Guideline for European technical approval of "External thermal insulation composite systems with rendering"
ETAG 009	2002-06	Guideline for European technical approval of "Non load bearing permanent shuttering kits/systems based on hollow blocks or panels of insulating materials and sometimes concrete"
Permanent shuttering kit "IZODOM 2000 POLSKA"		Annex B2
List of standards and guidelines		


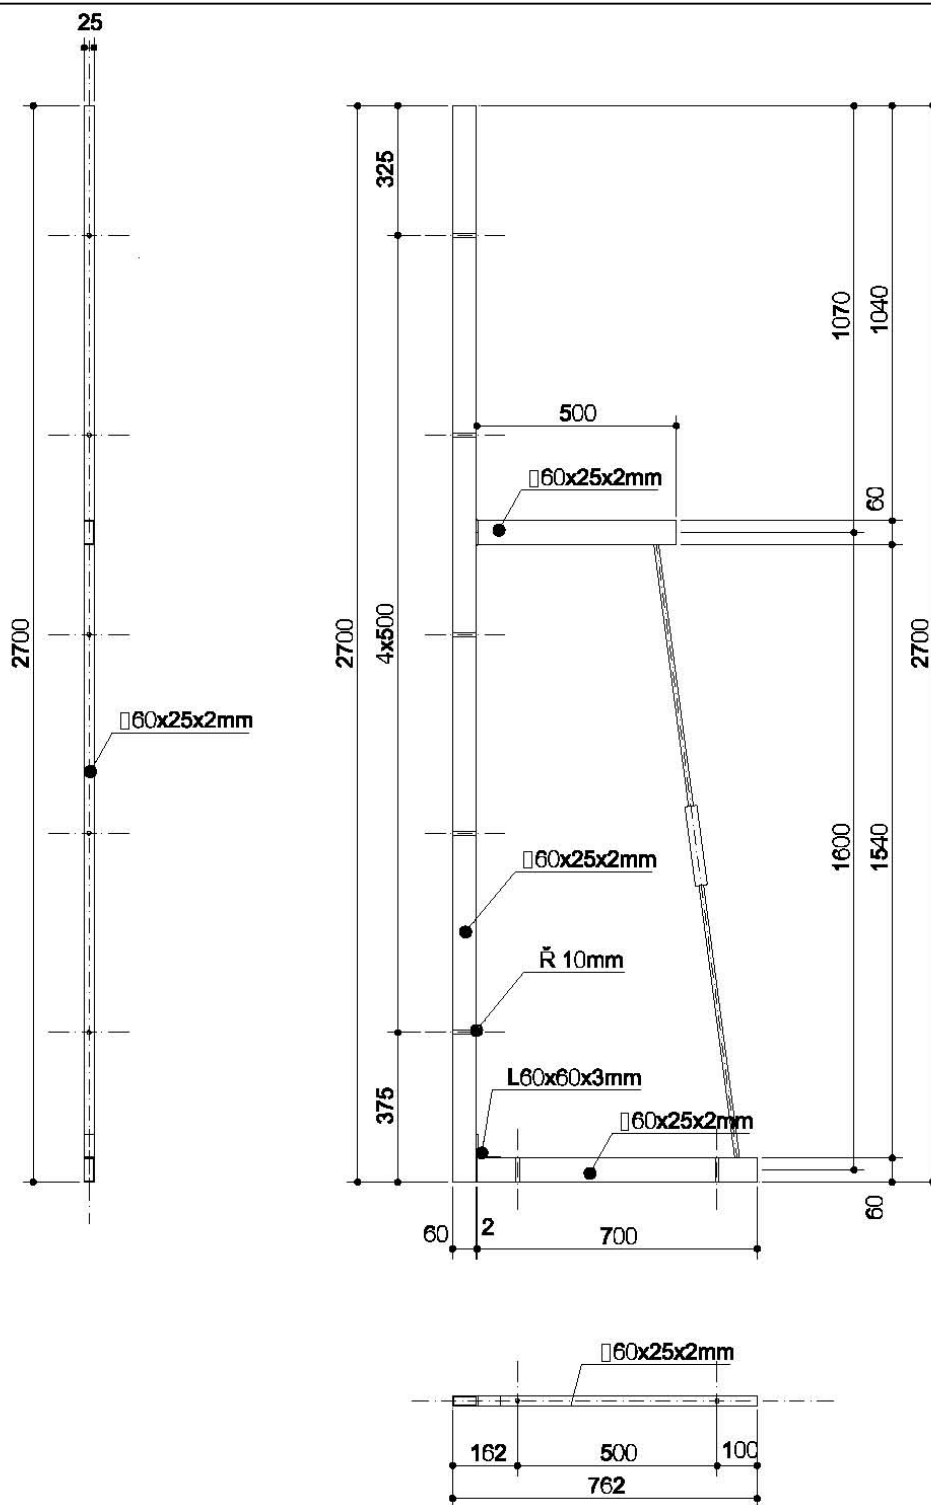


All dimensions in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

AUXILIARY STRUCTURES  
Wall support element for placing the concrete

Annex B3

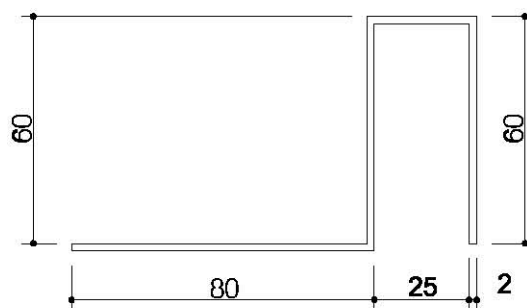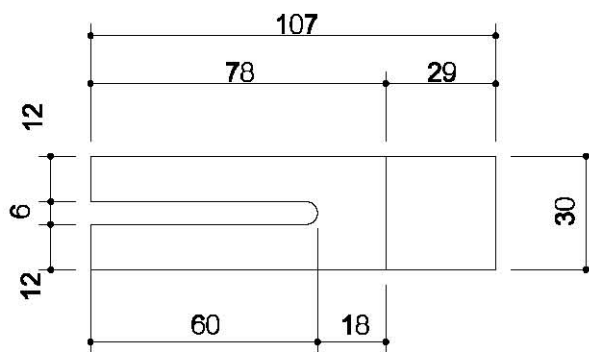


All dimensions in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

AUXILIARY STRUCTURES  
Clamp for steel support

Annex B4

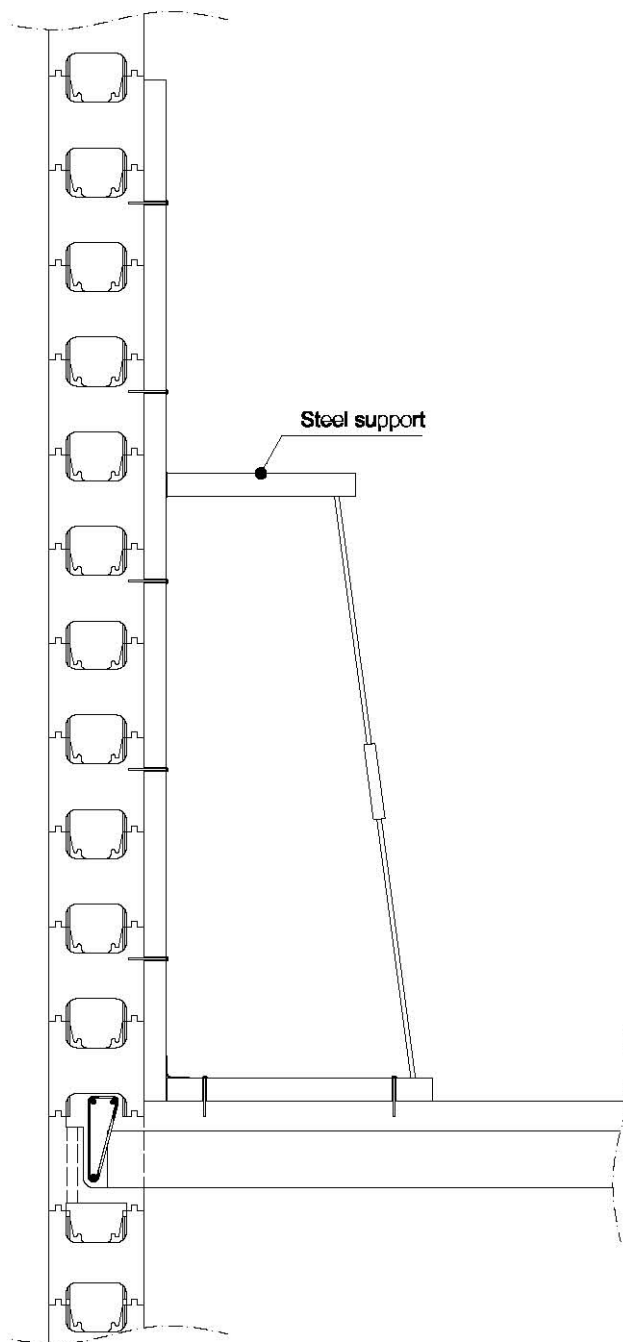


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

AUXILIARY STRUCTURES  
Installation of steel support for concrete pump

Annex B5

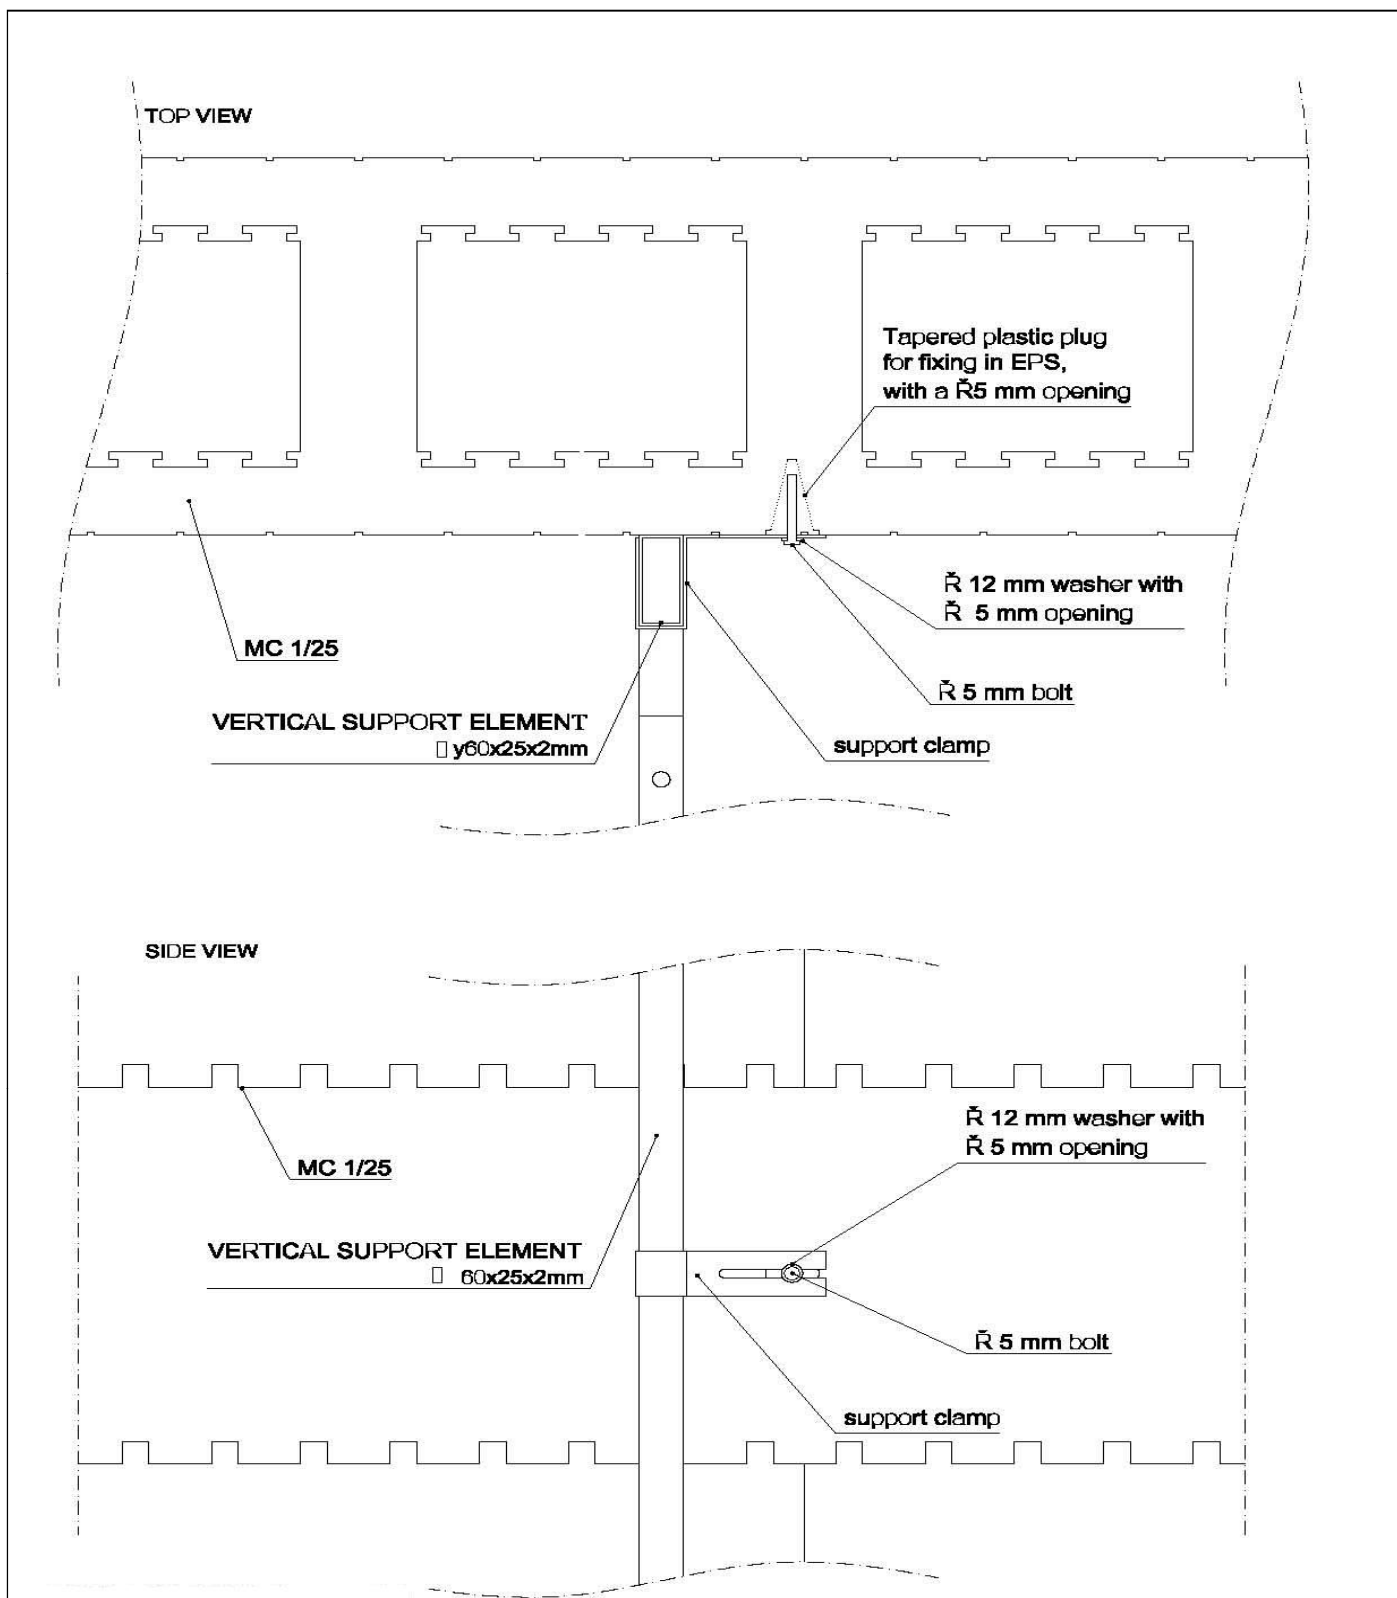


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

AUXILIARY STRUCTURES  
Shuttering wall fixing to steel support – version I

Annex B6

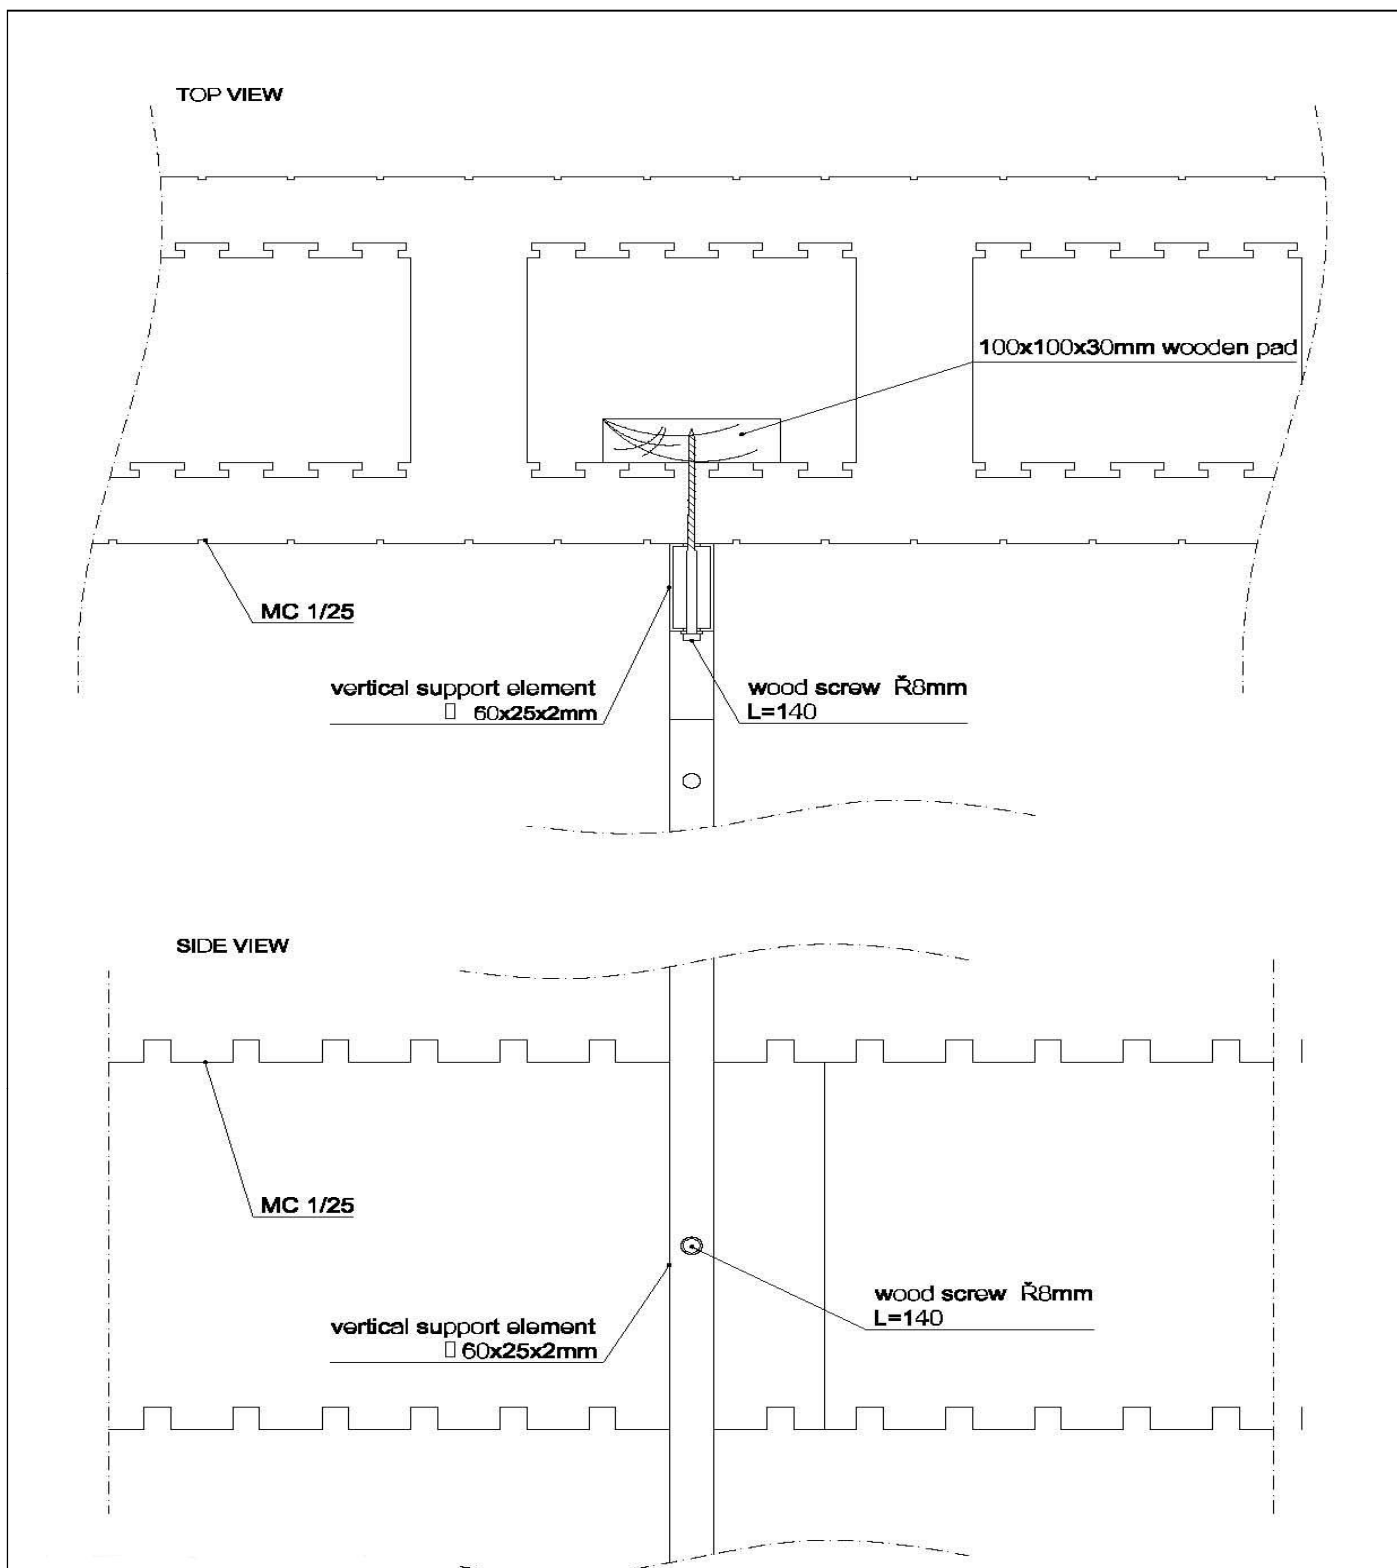


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

AUXILIARY STRUCTURES  
Shuttering wall fixing to steel support – version II

Annex B7

English translation prepared by DIBt


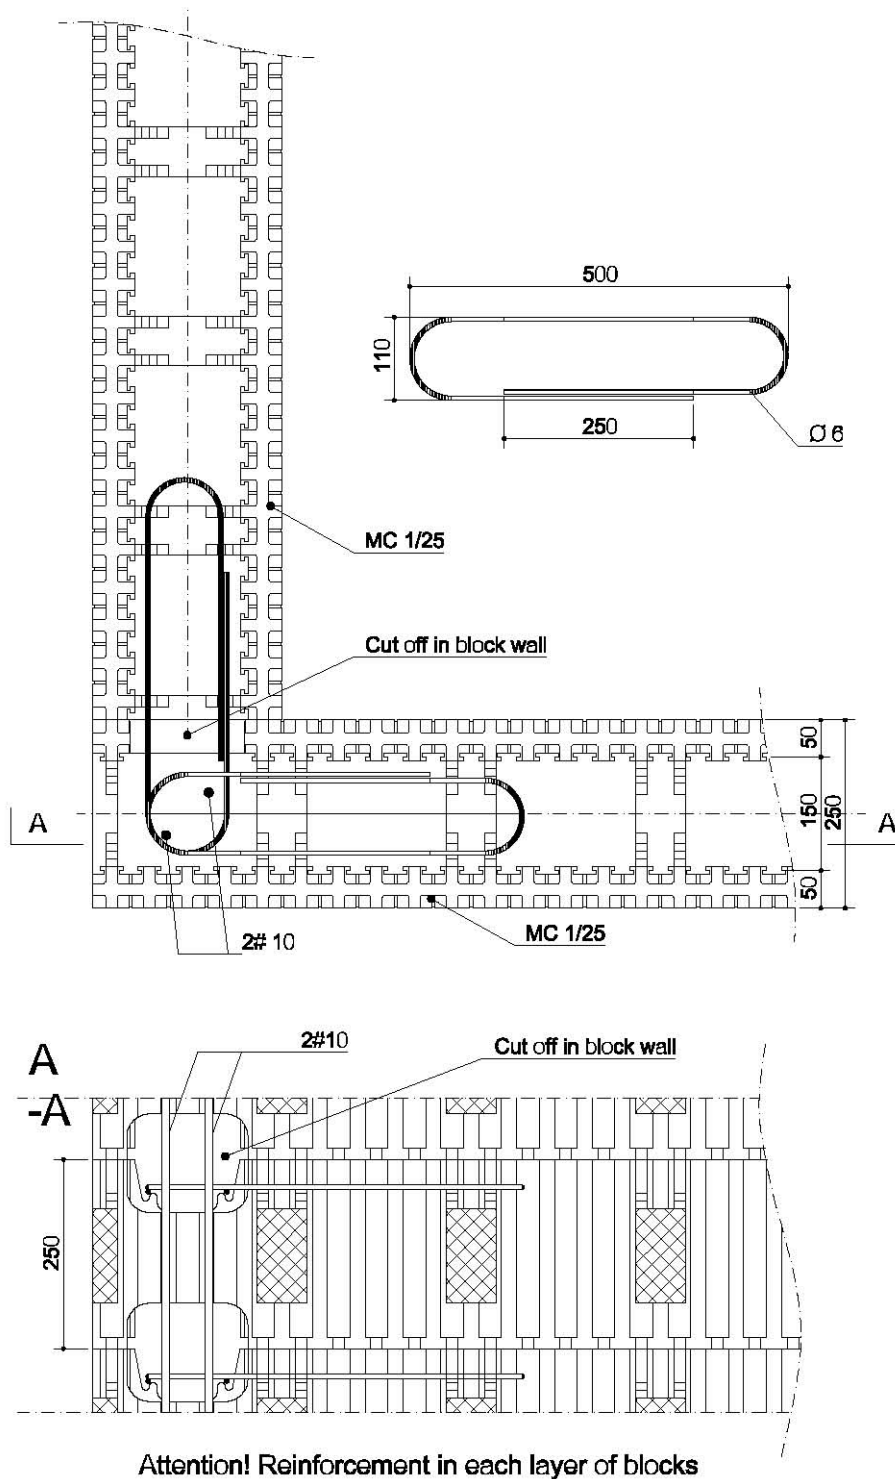


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "STANDARD"  
Corner joint of outer walls

Annex B8

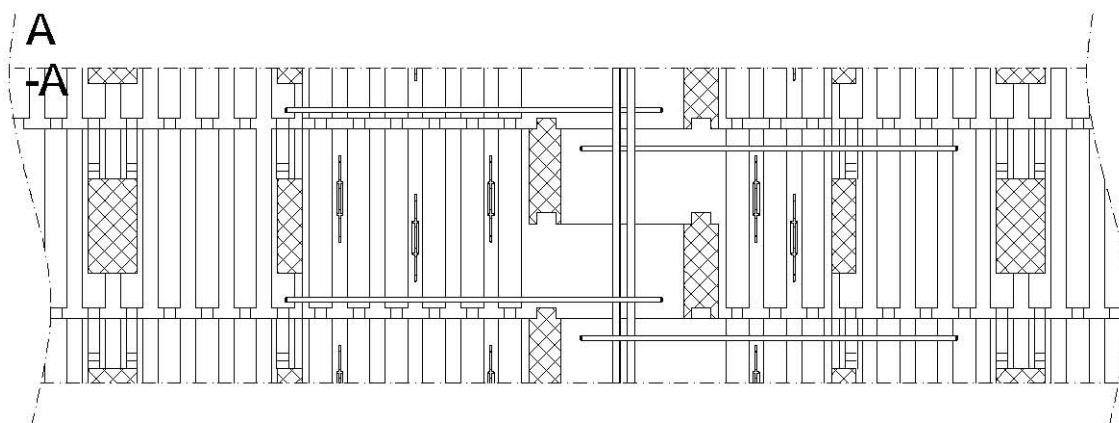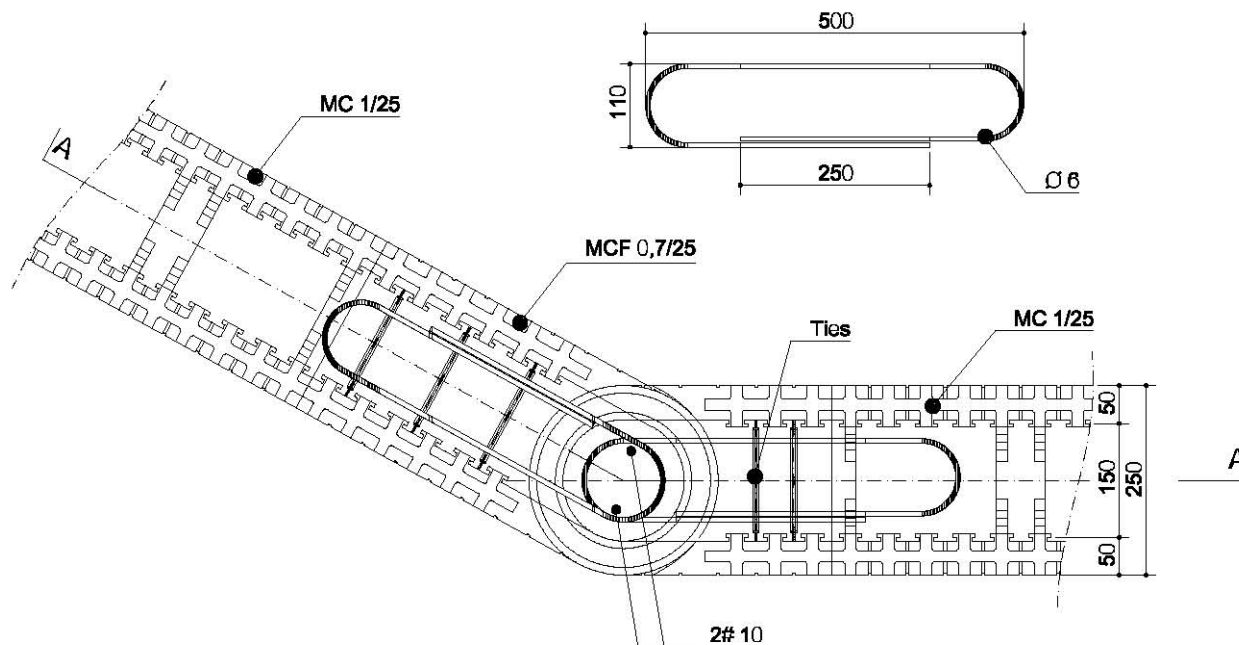


**Attention! Reinforcement in each layer of blocks**

All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "STANDARD"  
Outside wall corner joint at any angle

Annex B9

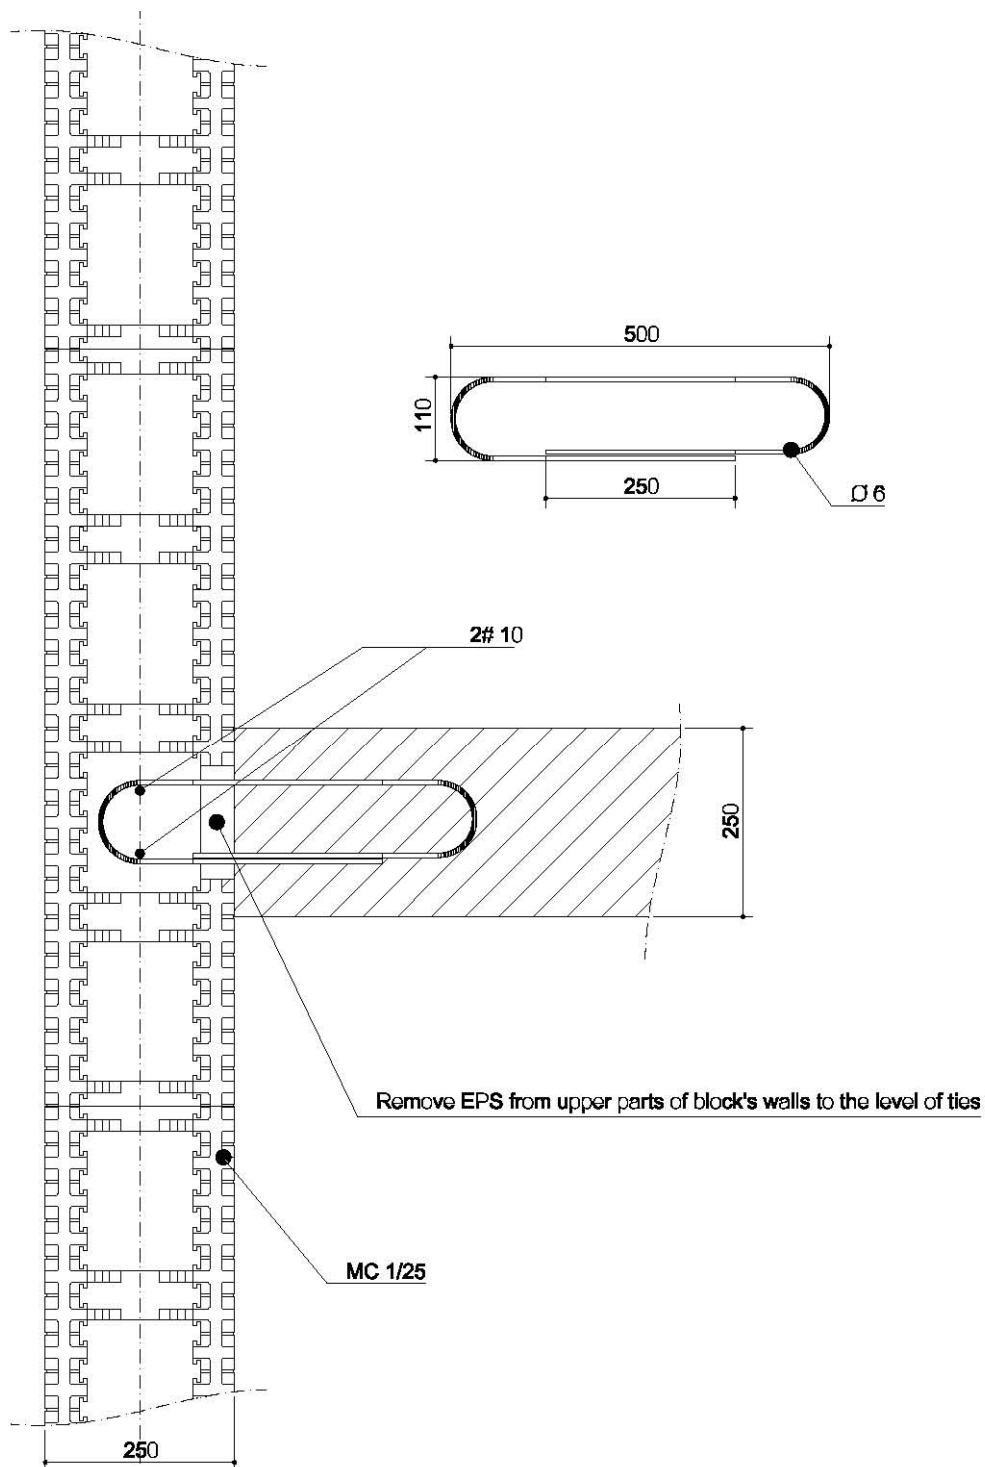


All dimensions are given in mm

Attention! Reinforcement in each layer of blocks

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "STANDARD"  
Joint of outer wall with inner load-bearing wall

Annex B10

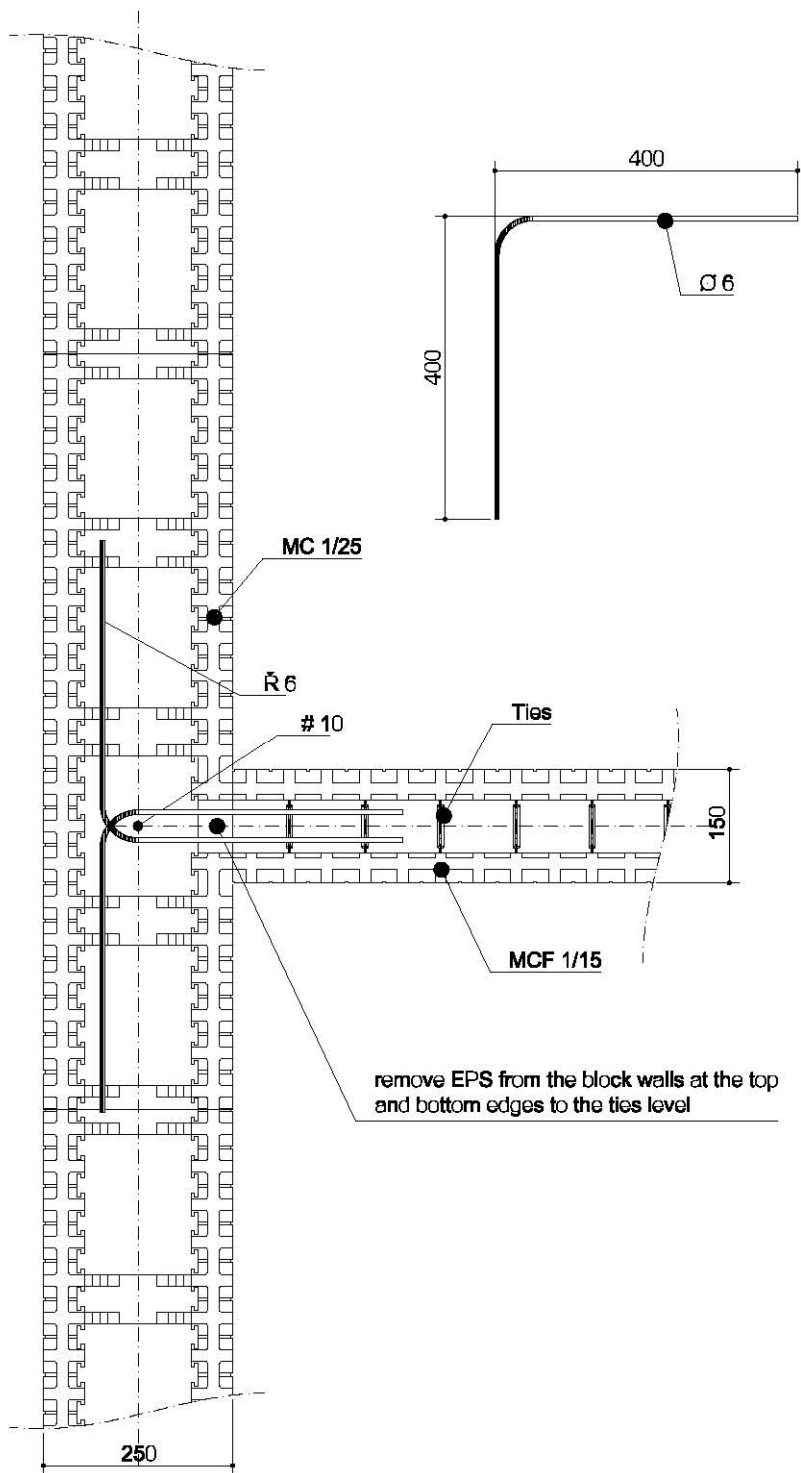


All dimensions are given in mm

Attention! Reinforcement in each layer of blocks

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "STANDARD"  
Joint of outer wall with inner partition wall

Annex B11

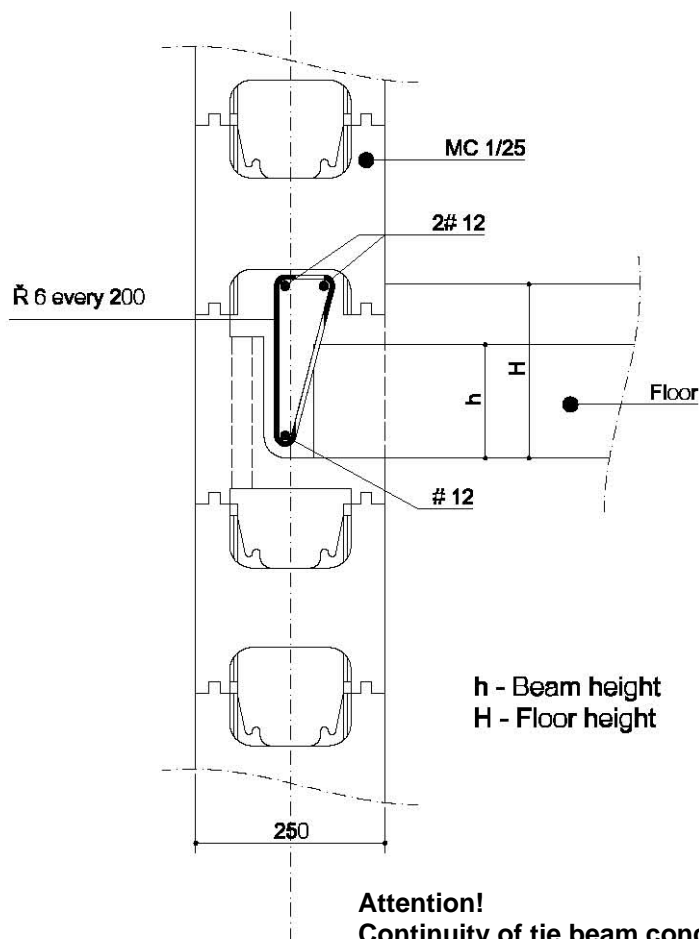

h - Beam height  
H - Floor height


**Attention!**  
Continuity of tie beam concrete and  
longitudinal reinforcement must be  
ensured

All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "STANDARD"  
Tie beam reinforcement

Annex B12

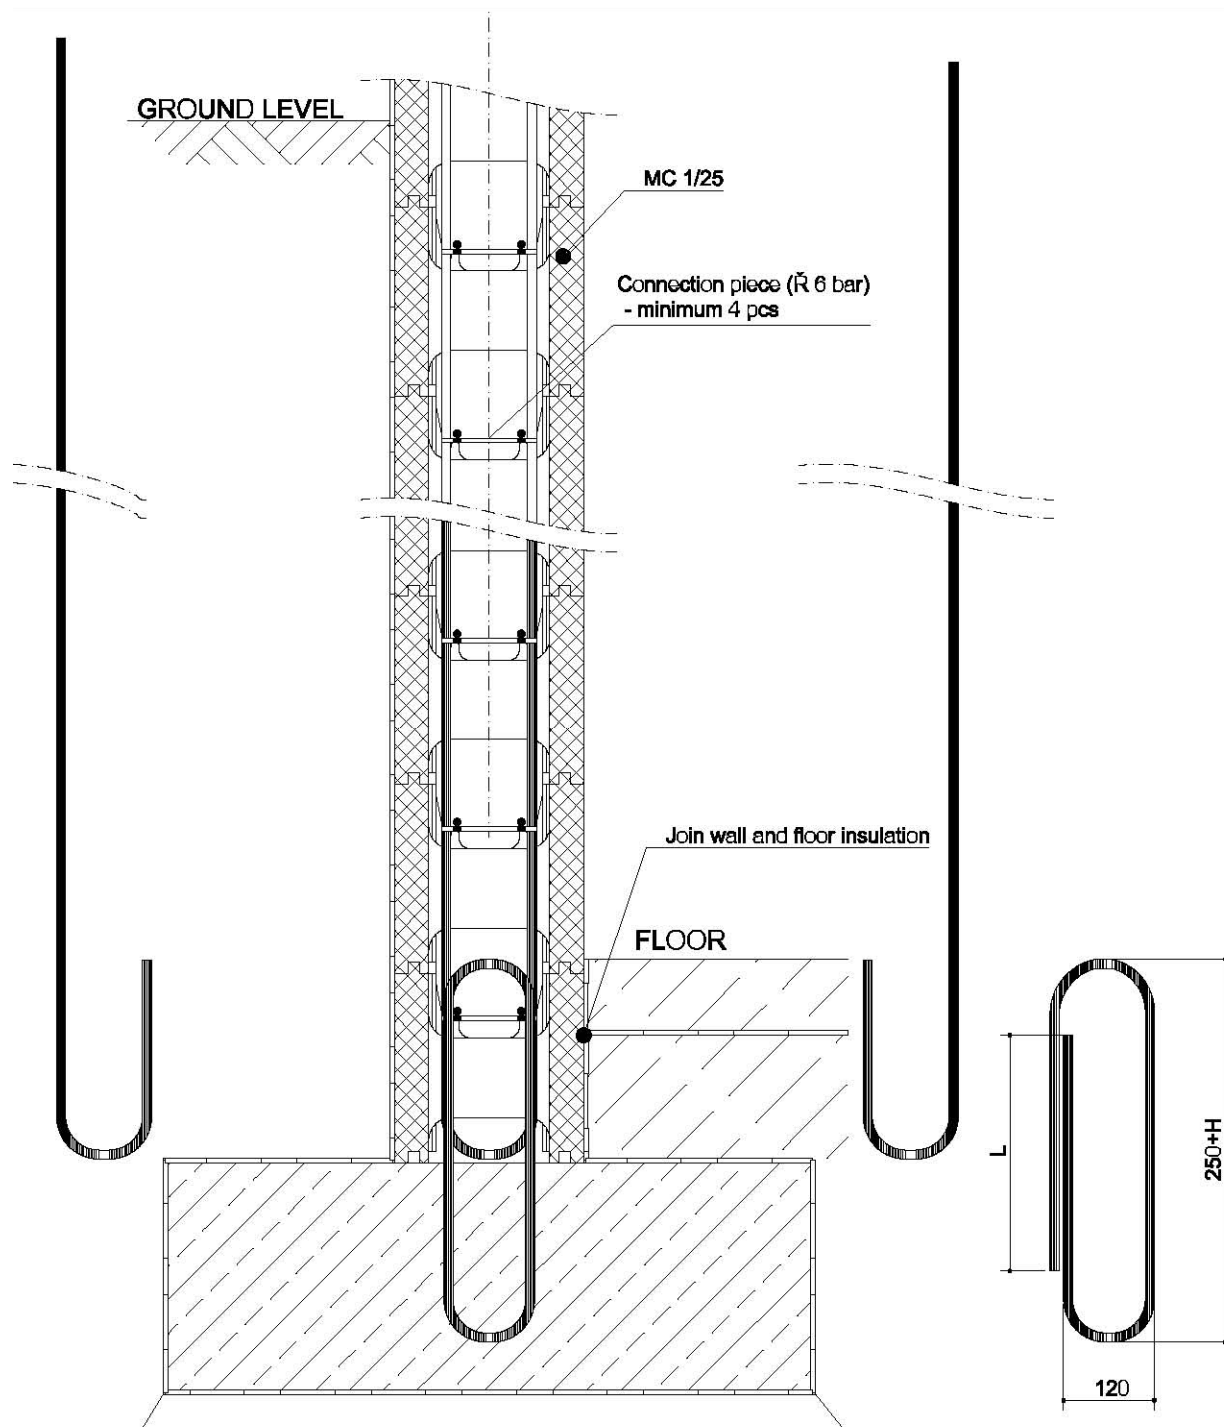

All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


DETAIL – SYSTEM: "STANDARD"  
Connection of reinforced concrete wall with strip footing  
(must be in accordance with static design calculations)

Annex B13

**Attention!**

1) Column footing must be designed in accordance with local geotechnical conditions

2) 2x4 R 12mm rebars must protrude from footing to connect with column reinforcement. The rebar overlap must be at least 480 mm.

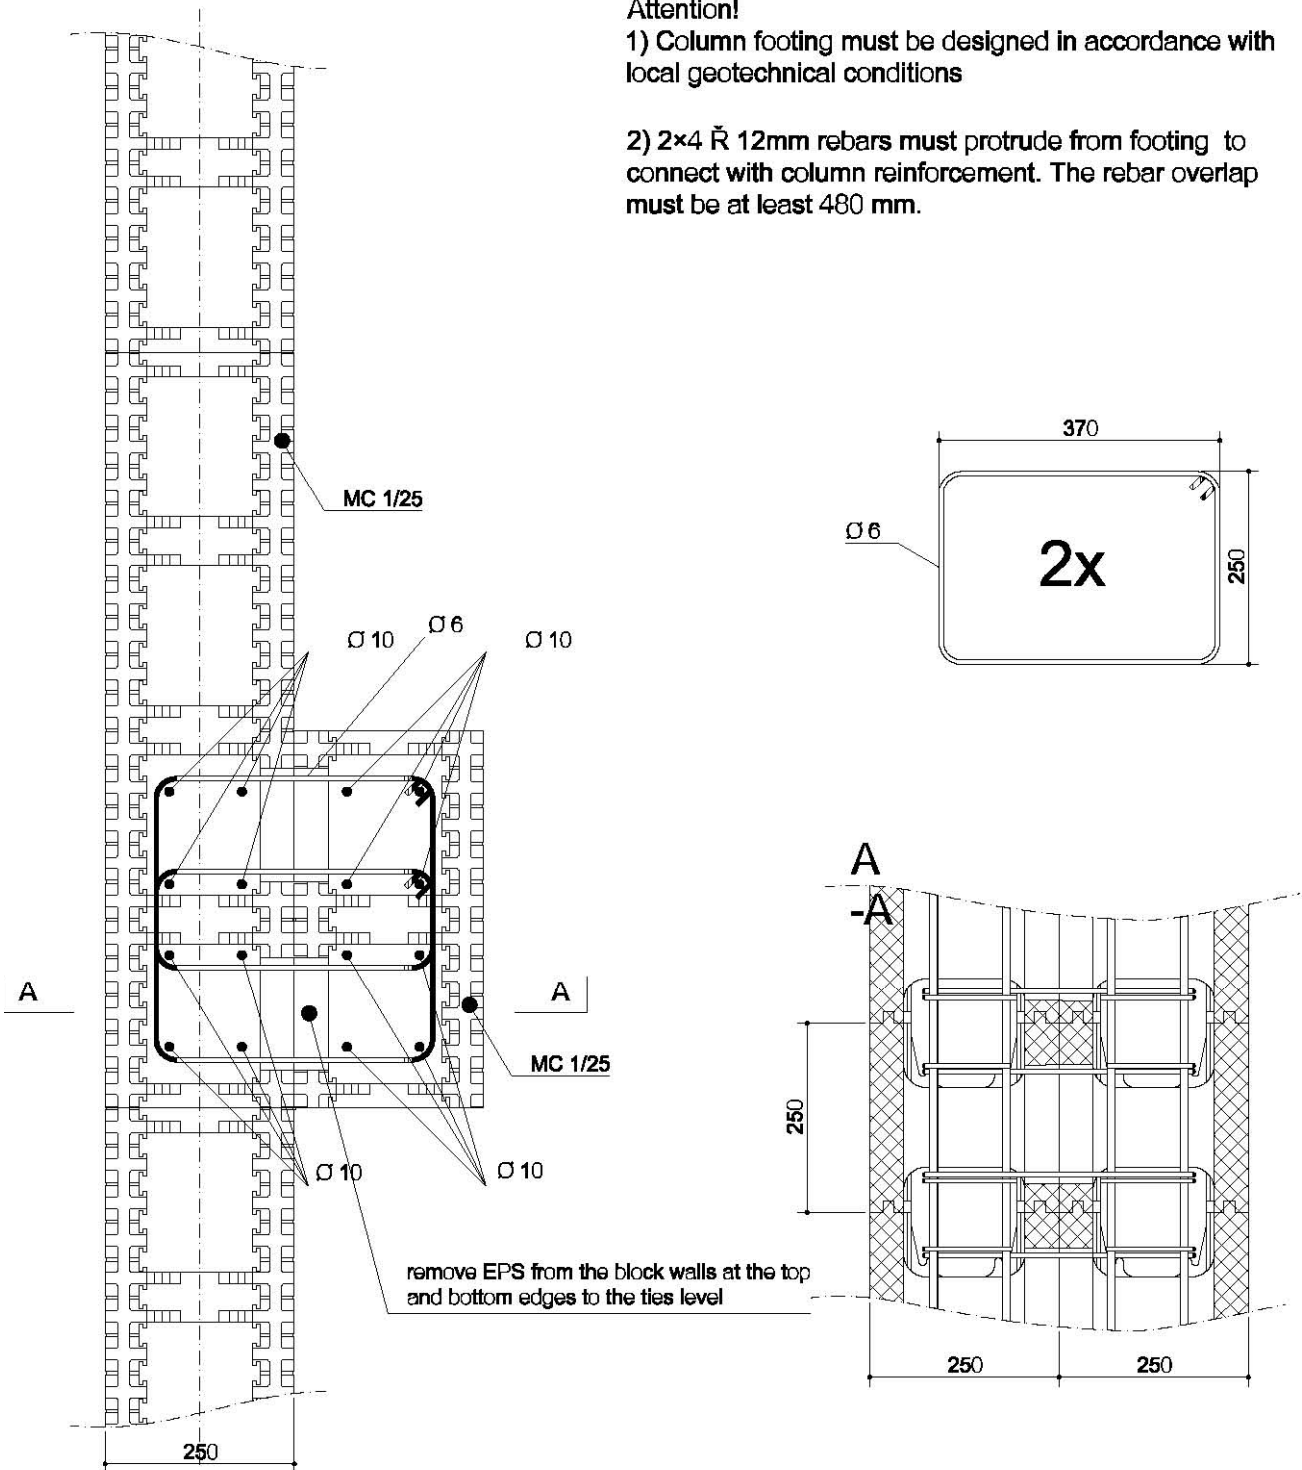


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "STANDARD"  
Reinforcement of a pilaster

Annex B14

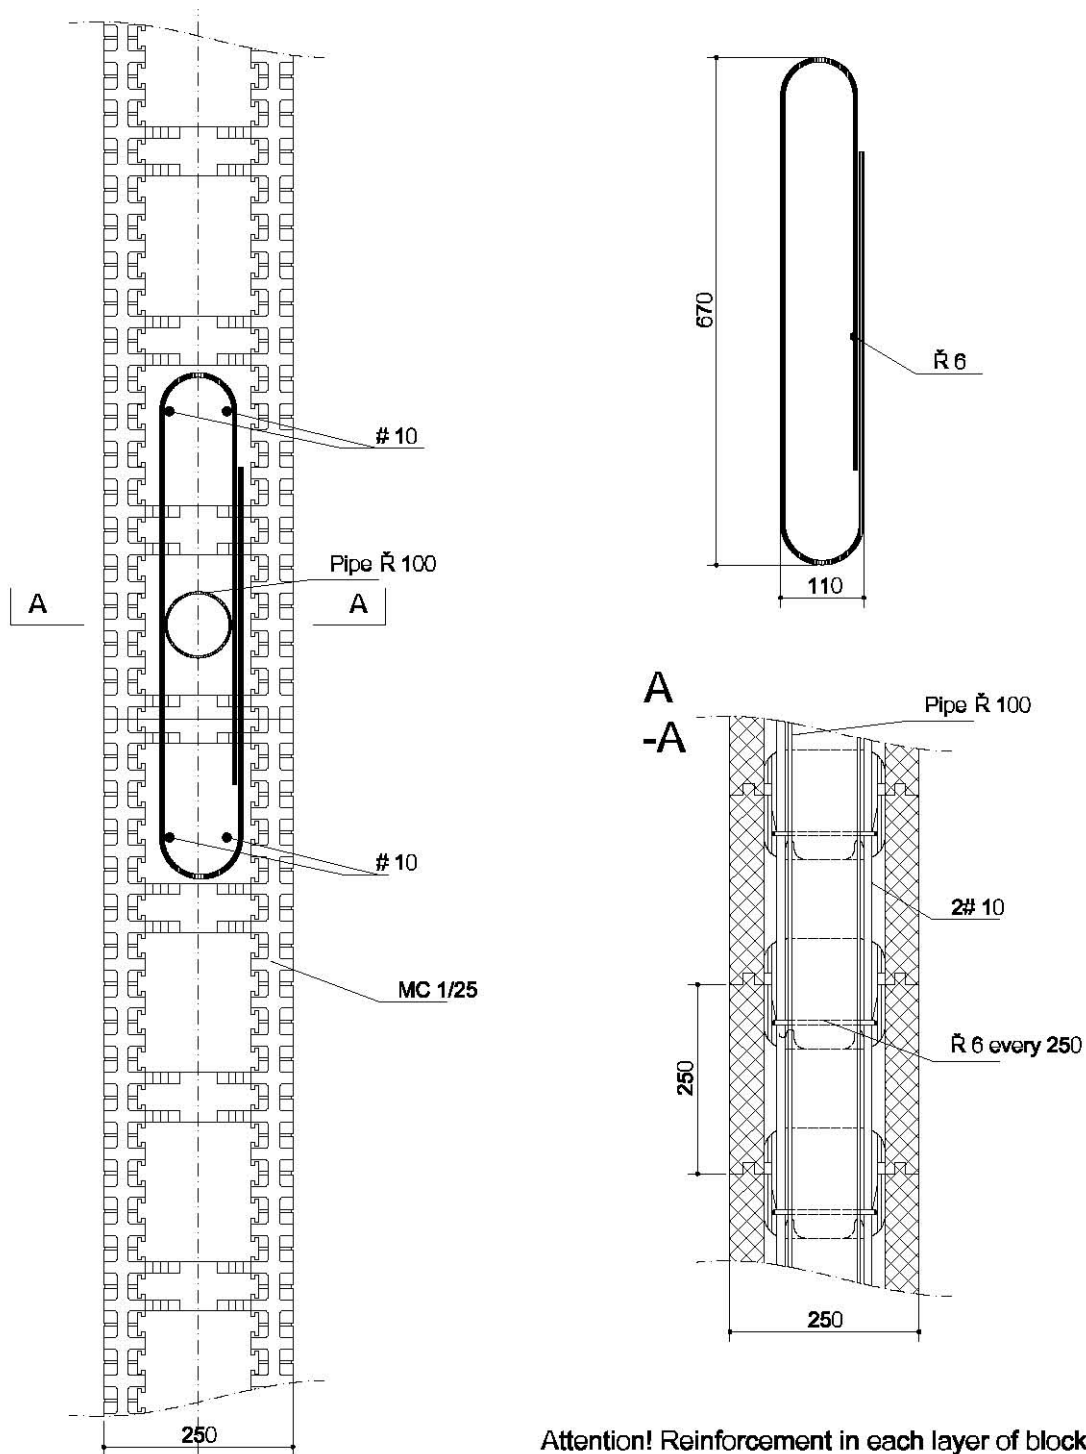


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "STANDARD"  
Reinforcement around installation conduit

Annex B15

English translation prepared by DIBt

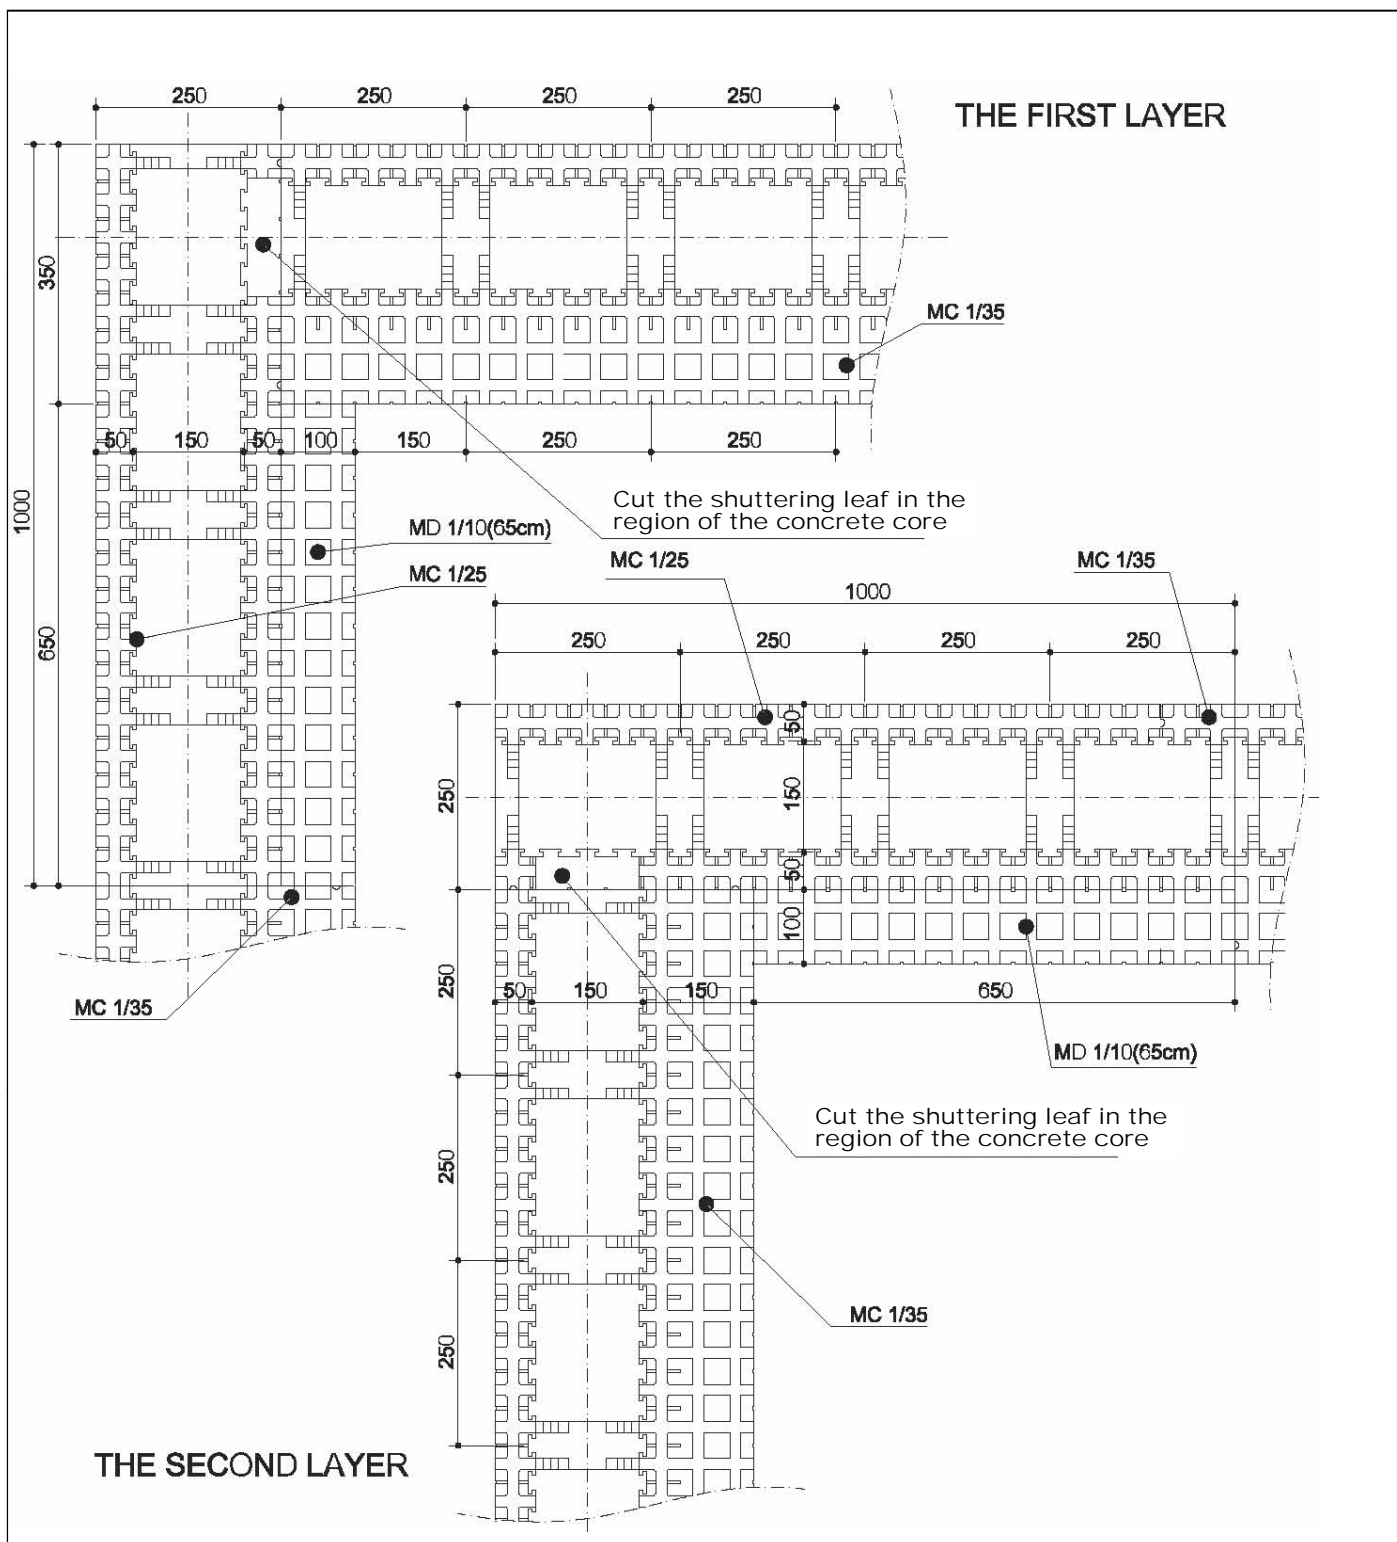


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "KING BLOCK"  
Inside corner for a 35cm wall

Annex B16

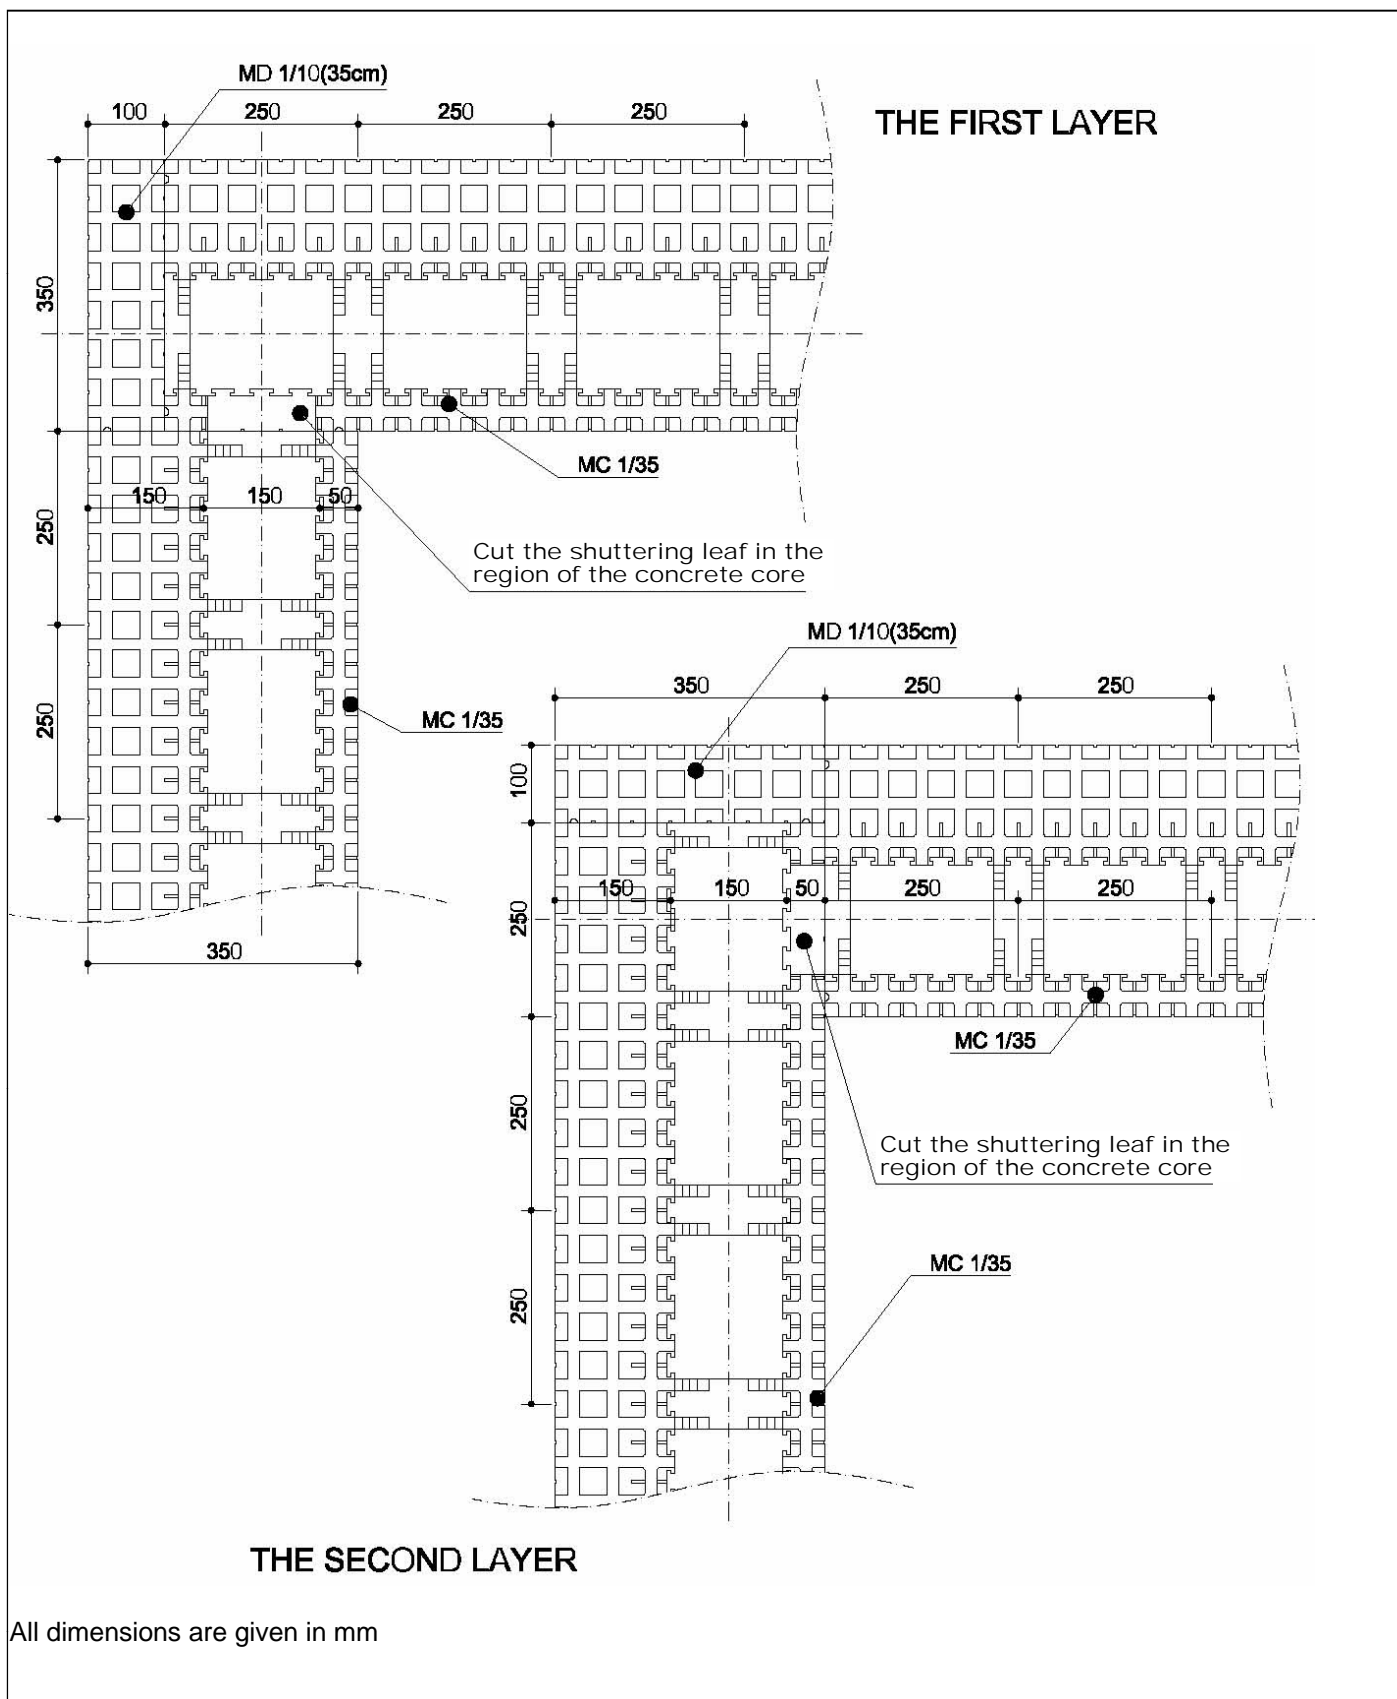


Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "KING BLOCK"  
Outside corner for a 35cm wall

Annex B17

English translation prepared by DIBt

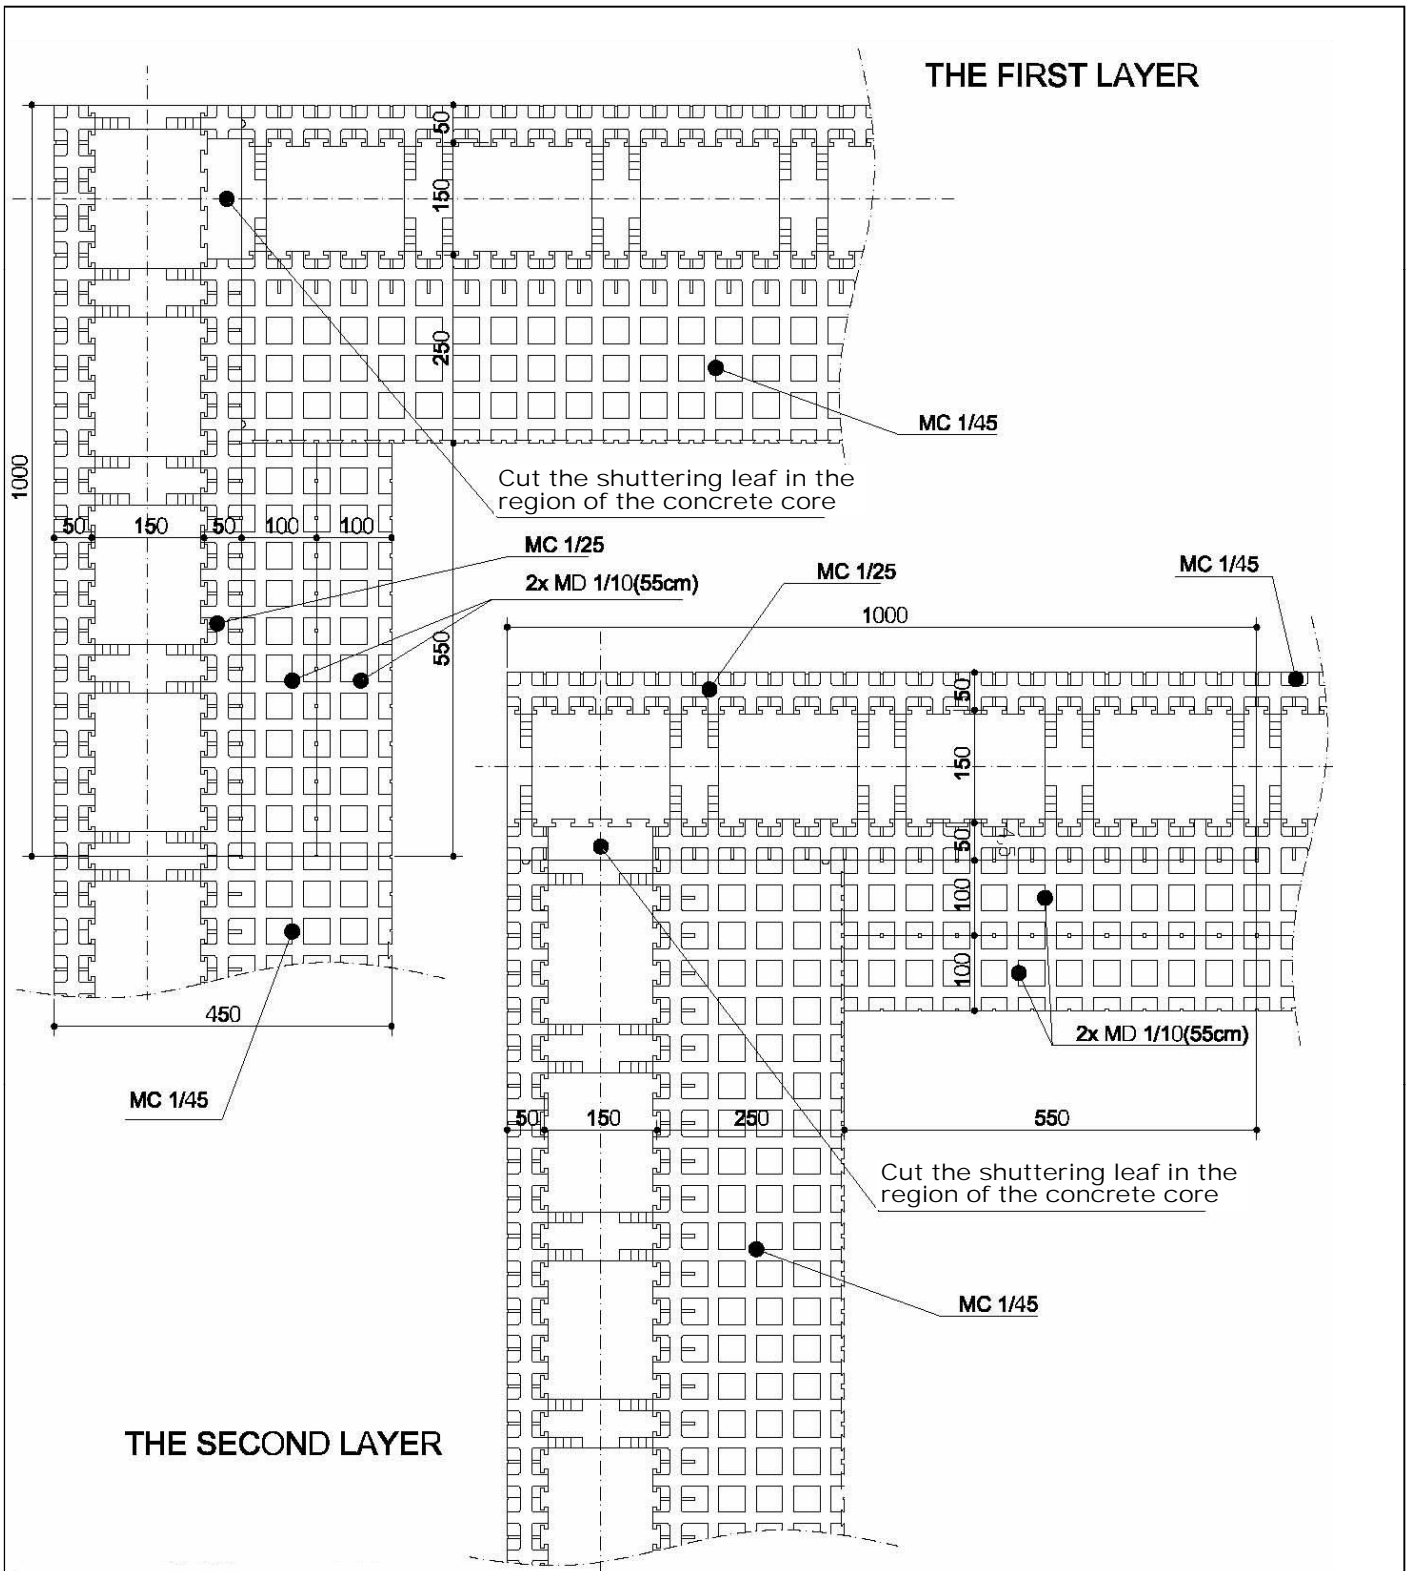


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL – SYSTEM: "SUPER KING BLOCK"  
Inside corner for a 45cm wall

Annex B18

English translation prepared by DIBt

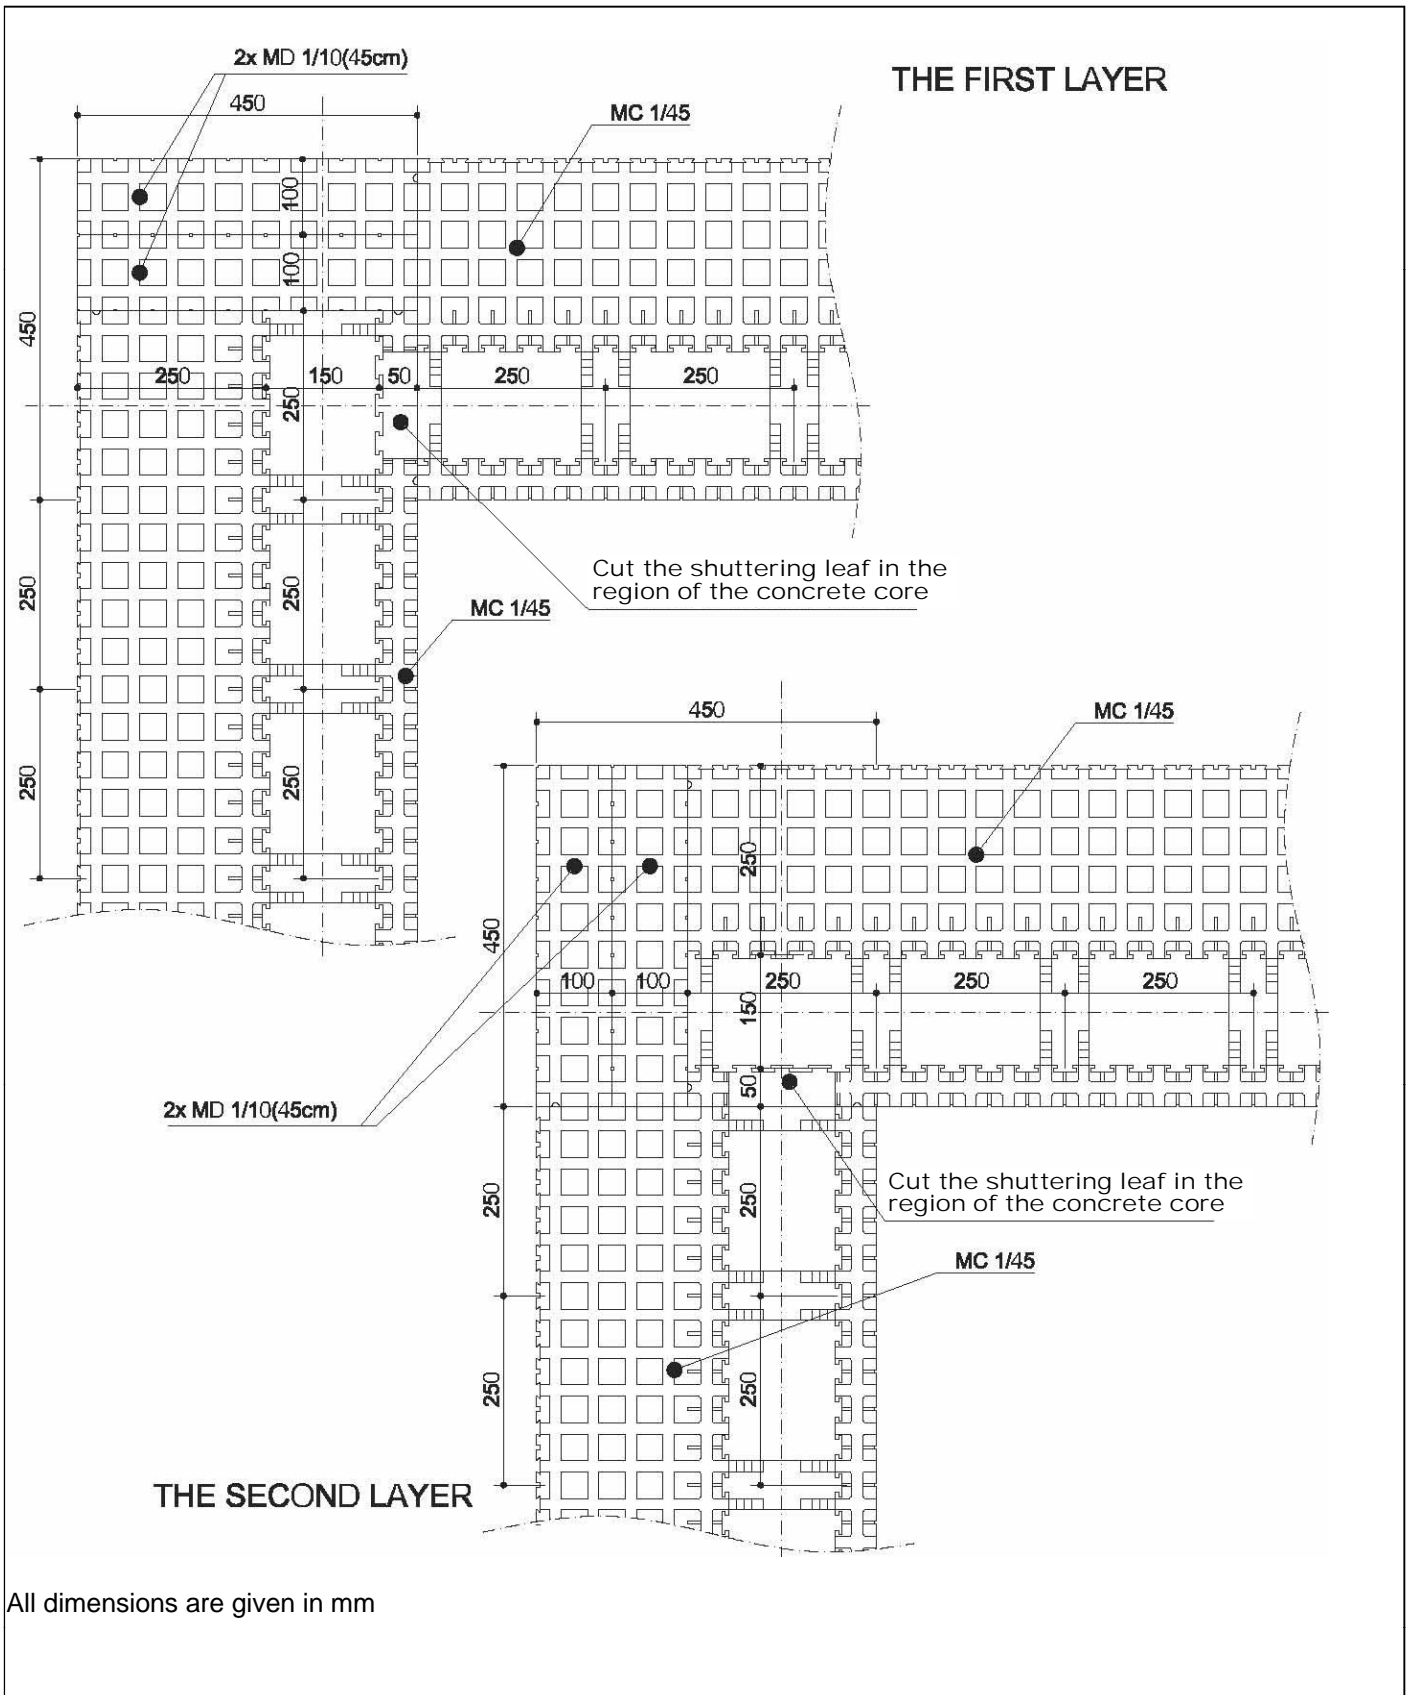


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


DETAIL – SYSTEM: "SUPER KING BLOCK"  
Outside corner for a 45cm wall

Annex B19

HEADER BLOCK LOCATION DIAGRAM ML 1/25

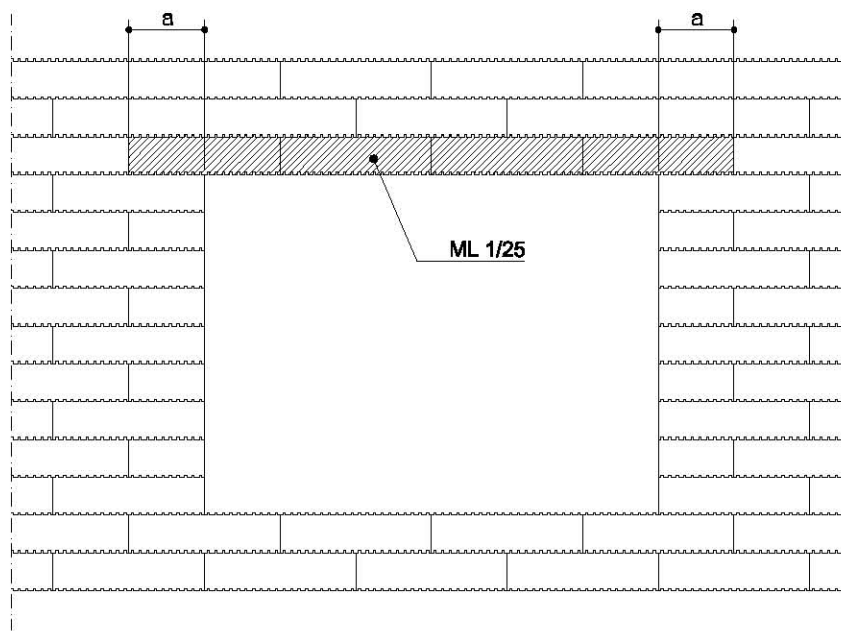

TEMPORARY (PROVISIONAL) PLACEMENT OF THE BLOCKS  
FOR THE SAKE OF DIMENSIONAL ACCURACY IN THE WINDOWS WITHOUT HEADERS

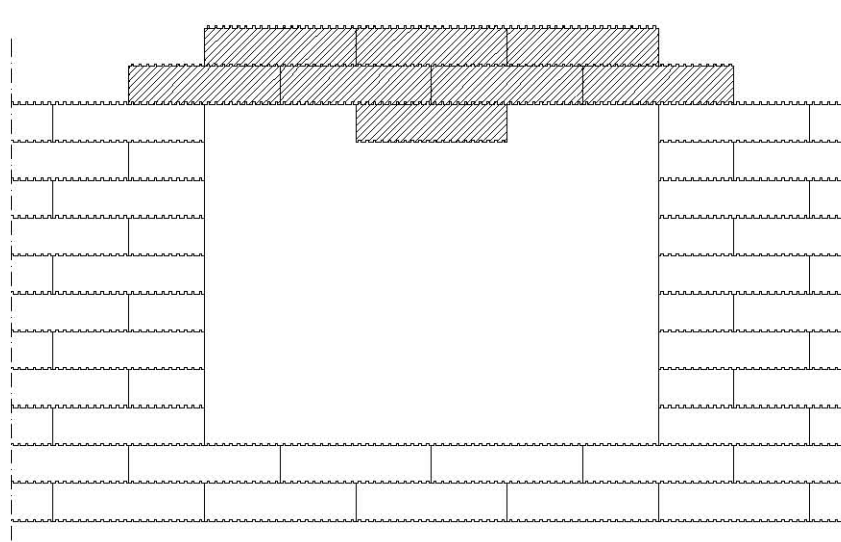


Permanent shuttering kit "IZODOM 2000 POLSKA"


DETAIL  
Diagram of placing blocks in the wall  
and method of making door and window openings

Annex B20


FASTENING OF UPPER WINDOW FRAME – DETAIL

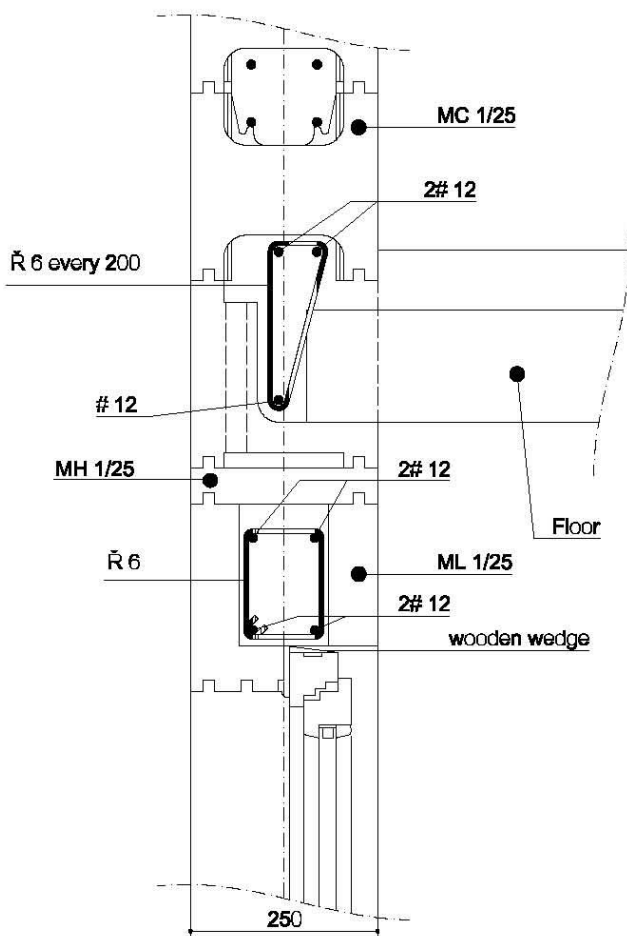

FASTENING OF BOTTOM WINDOW FRAME – DETAIL

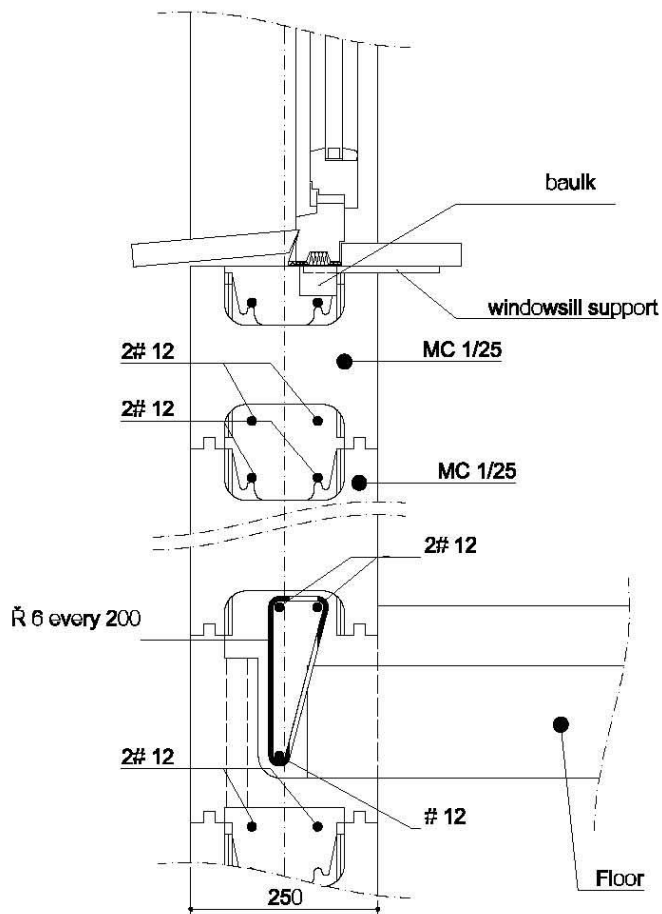

FASTENING OF SIDE WINDOW FRAME – DETAIL

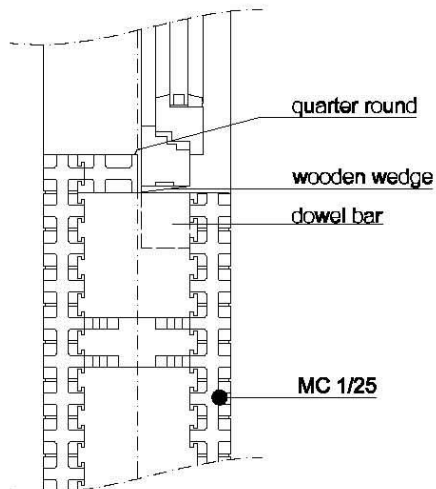


All dimensions are given in mm

Permanent shuttering kit "IZODOM 2000 POLSKA"


DETAIL  
Fixing of windows

Annex B21


BY PARTIAL EPS REMOVAL

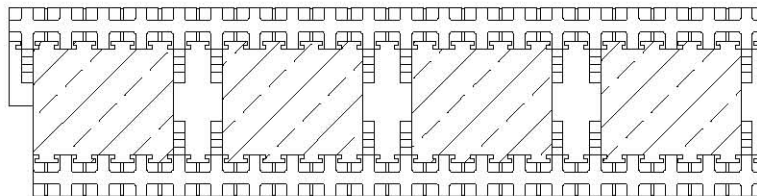


BY PARTIAL EPS REMOVAL

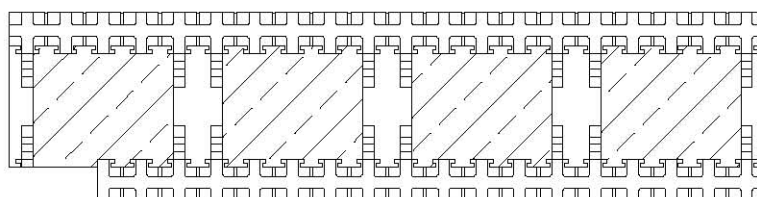

WITH A BAULK USED AS FORMWORK

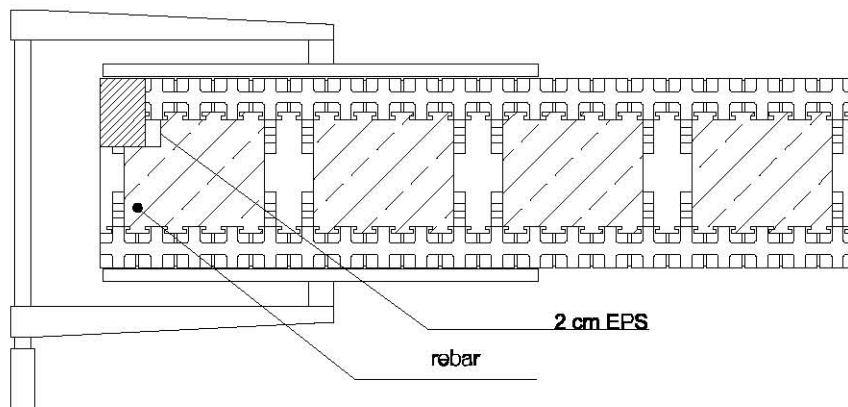

WITH A BAULK USED AS FORMWORK

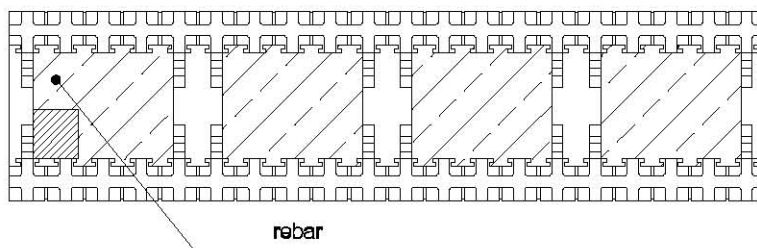

Permanent shuttering kit "IZODOM 2000 POLSKA"

DETAIL  
 Possible methods of external reveal construction

Annex B22